



BENVENUTI NEL 2020

LA NOSTRA GAMMA 2020 È INCENTRATA SULL'INTRODUZIONE DI NUOVI ED ENTUSIASMANI CONCETTI DI TELAIO, PERFEZIONANDO LA NOSTRA GAMMA CLASSICA E LA PROSPERITÀ ININTERROTTA PER MIGLIORARE ULTERIORMENTE ANCHE IL PIÙ PICCOLO DETTAGLIO DEI NOSTRI PRODOTTI.

UNO DEI MAGGIORI PUNTI SALIENTI DELLA STAGIONE 2020 È LA RIPROGETTAZIONE DI LA BICI PIÙ PREMIATA CHE ABBIAMO MAI REALIZZATO - LA EONE-SIXTY - CHE ORA INCORPORA GLI STANDARD PIÙ RECENTI MANTENENDO E PERSINO MIGLIORANDO LA CARATTERISTICHE DI GUIDA IMPAREGGIABILI E SPESSO MOLTO APPREZZATE DELLA EONE-SIXTY "ORIGINALE". MA LO SVILUPPO DI E-BIKE NON SI FERMA QUI. EONE-SIXTY HA ORA UNA CONTROPARTE PIÙ FOCALIZZATA SUL TRAIL IN EONE-FORTY. INOLTRE, LA GAMMA ESTREMAMENTE POPOLARE DI ESPRESSO HA VISTO UNA COMPLETA REVISIONE, NONCHÉ UN'ESTENSIONE DELLA NOSTRA OFFERTA DI E-BIKE ATTIVA, SOTTO FORMA DELL'ATTESISSIMO 650B ESPRESSO TK E CC. PER COMPLETARE L'INTRODUZIONE DELLA PIÙ RECENTE TECNOLOGIA E-BIKE, ABBIAMO ANCHE RIPROGETTATO EBIG.NINE E EBIG.TOUR. E, ULTIMO MA NON MENO IMPORTANTE, LA NOSTRA SCALA SPEEDER, LA BICI DA STRADA E FITNESS DA MANUBRIO, HA VISTO RISULTATI SIGNIFICATIVI CAMBIA E SIAMO DAVVERO ENTUSIASTI DI PRESENTARE IL NUOVO GAMMA DI BICI PER BAMBINI MATTS J + CON IL SUO DESIGN MODERNO DEL TELAIO E DETTAGLI INTELLIGENTI.

MA NON CI FERMIAMO QUI. LE INNOVAZIONI, I MIGLIORAMENTI E LE TECNOLOGIE CHE HANNO TROVATO LA LORO ORIGINE NELLE BICI DI ALTO LIVELLO SI FANNO STRADA IN CONTINUAZIONE, MIGLIORANDO LE CARATTERISTICHE DI GUIDA, LA LONGEVITÀ, FACILITÀ DI MANUTENZIONE E DIVERTIMENTO SULLE BICI PIÙ ENTRY LEVEL DELLA NOSTRA GAMMA.

INOLTRE SPONSORIZZIAMO UNA SERIE DI ATLETI MULTIDISCIPLINARI
LAVORARE A STRETTO CONTATTO CON LORO PER LO SVILUPPO, I TEST E
MESSA A PUNTO DEL PRODOTTO.

VEDI IL NOSTRO SITO WEB, FACEBOOK E INSTAGRAM PER ULTERIORI DETTAGLI.



4	MISSION STATEMENT
6	GERMAN ENGINEERING AND DESIGN
8	HANDMADE IN TAIWAN
10	CARBON TECHNOLOGY
11	ALUMINIUM TECHNOLOGY
12	TECHNOLOGIES

MOUNTAINBIKES

16	NINETY-SIX
26	ONE-TWENTY RC
36	ONE-TWENTY
52	ONE-FORTY
64	ONE-SIXTY
74	BIG.NINE / SEVEN
116	MATTS

YOUTH & KIDS

130	MATTS J / MISSION J
-----	---------------------

ROAD / FITNESS / GRAVEL

160	REACTO
184	SCULTURA
220	MISSION ROAD
228	REACTO TRACK
232	SPEEDER
250	SILEX
264	MISSION CX

TREKKING & CITY

276	CROSSWAY
296	CROSSWAY URBAN

E-BIKES

308	E-BIKES OVERVIEW
310	SHIMANO E-BIKE SYSTEMS
316	eONE-SIXTY
332	eONE-FORTY
342	eONE-TWENTY
350	eBIG.NINE/SEVEN
366	eBIG.TOUR
378	eESPRESSO
400	eESPRESSO CITY
416	eESPRESSO TK/CC



GARANZIA A VITA SUL TELAIO

A partire dal catalogo 2016, i telai Merida sono coperti dalla garanzia a vita del produttore per i difetti all'origine (valida dalla data di acquisto da parte del primo acquirente) ad esclusione dei modelli biammortizzati con escursione uguale o superiore a 140 mm. Per maggiori dettagli fare riferimento al libretto incluso nel kit di vendita.





OUR

MISSION STATEMENT

Molti anni fa il nostro fondatore Taiwanese, Ike Tseng, aveva visitato gli Stati Uniti dove notò un cartello in un negozio di bici il quale dichiarava che le biciclette fabbricate in Taiwan non sarebbero state riparate a causa della loro scarsa qualità. Da quel momento ha iniziato la sua missione per cambiare questa percezione.

Nel 1972 ha fondato MERIDA; le tre sillabe Me-ri-da si traducono grossomodo come "l'intenzione di fabbricare solo prodotti bellissimi e di alta qualità accessibili a tutti per raggiungere la propria destinazione nel modo più piacevole possibile". In questo arco di tempo, Ike ha dato un nuovo volto alla produzione di biciclette, contribuendo a portare Taiwan tra le aree più importanti al mondo.

Noi continuiamo a seguire la nostra missione, producendo fino a 1,5 milioni di biciclette all'anno. Siamo talmente sicuri dei nostri prodotti che offriamo la garanzia a vita sui telai.


MERIDA. MORE BIKE.



GERMAN

ENGINEERING AND DESIGN

Our Stuttgart based R&D team is constantly developing the next generation of bikes. With state-of-the-art in-house test labs, extensive workshops and of course many hours of riding, they create, test and refine new frame concepts. Our designers work in close cooperation with our pro athletes who push our products to the very limits in some of the most demanding conditions.

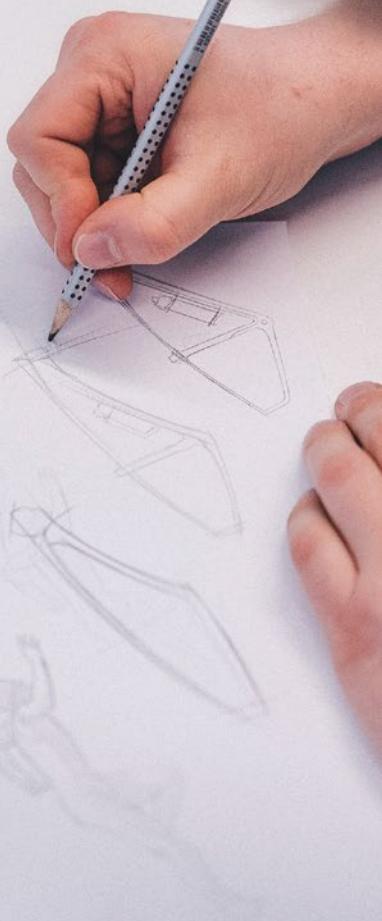



47 YEARS

HANDMADE IN TAIWAN

In our 47 years of manufacturing bikes, we've seen plenty of change; fashions have evolved, different styles of bikes have come and gone. Our core skill remains the same, building high quality, high-performance bikes for every kind of rider. We are so confident in our abilities we don't just put our name on our bikes, we test our products far beyond ISO requirements and offer a Lifetime Frame Warranty.





C A R B O N S T A T E O F T H E A R T T E C H N O L O G Y

MERIDA's philosophy is that you should work with industry experts when they can do something better than you. This is definitely true when looking at carbon production. We collaborate with the best producers to ensure we are always at the leading edge of technology. Our partners are constantly developing highly refined production techniques for other industries, meaning that we can select the best manufacturer to satisfy the varying needs of each frame we develop.

CARBON PRODUCTION IS VERY COMPLEX

Marketing has created a mystique around carbon frame quality; labels such as high tensile, high modulus, super high modulus and ultra-high modulus dominate the market. These terms relate to carbon's properties, not its quality. Toho or Torray are sometimes mentioned to add perceived credibility. Some brands say all carbon is the same, or that they use only ultra-high modulus fibres. In reality, high performance carbon frames must incorporate many different fibre types, each carefully positioned to achieve the right technical properties. For example, our SCULTURA frame weighs 850 g (size M/L), comprises 400 individual carbon sections, it takes over 45 hours to build.

CARBON IS DEFINITELY NOT ALL THE SAME

Visually identical frames can vary in quality due to the level and mix of carbon fibres used. MERIDA uses a CF number to demonstrate the performance level; 2 is the lowest, 5 the highest. Subtle tweaks to the carbon fibres used both save weight and improve performance.

CUTTING EDGE ALUMINIUM FRAMES

We have produced cutting edge aluminium frames for many years, continually refining our knowledge and developing new technologies.

We take great care in selecting or, in some cases, developing grades of aluminium appropriate to the demands of each bike we manufacture. For example, 6016 aluminum enables super thin wall thicknesses with amazing strength, ideal for demanding off-road riding and racing. 6066 aluminium is extremely light and durable, allowing manipulation to create the best possible stiffness to weight ratio. 6061 is the minimum grade we use, developed for the aerospace industry, enabling the production of lightweight and highly advanced frames.

The way aluminium is treated and manipulated is as crucial as the grade selection. There are a number of processes involved:

DOUBLE AND TRIPLE BUTTING

Double butting describes tubes with two wall thicknesses; thicker at the ends and thinner in the middle.

Triple butting describes tubes with three different wall thicknesses along their length, optimising strength where it is needed but minimising weight in areas subjected to less stress.

All our aluminium is heat treated. Frames are heated to very high temperatures (a T6 temper) then quickly cooled in water or oil to ensure the alloying elements don't precipitate. Frames are subsequently heated to a lower temperature, artificially ageing and significantly strengthening them.

HYDRO AND TECHNOFORMING

Hydroforming involves the insertion of tubes into negative moulds. A hot emulsion of water and oil is forced through at pressure, enabling them to be formed into complex shapes. Technoforming is a mechanical forming process, shaping the tubes by using negative moulds, at times combined with an internal metal core.

Smooth welding, also known as double pass welding, refers to a second pass over the weld providing a clean organic look to the frame; at first glance, you will be convinced it is carbon, not aluminium.



**Smart Entry**

I cavi e le guaine dei freni sono fissati sotto tensione per prevenire lo sferragliamento quando il percorso diventa movimentato. Tutte le entrate sono completamente intercambiabili per adattarsi a Di2, tubi idraulici, custodia dei cavi del cambio e dei freni, etc.

**FLEX STAY**


I profili del reggisella e dei foderi posteriori nei nostri modelli in carbonio hanno una speciale struttura che lavora come una molla piatta che assorbe gli urti superficiali e riduce efficacemente le vibrazioni.

**INTERNAL CABLE ROUTING**

I cavi sono instradati all'interno del telaio, entrando e uscendo attraverso cavità smussate. La bici ha un'aria ordinata e allo stesso tempo i cavi sono protetti da umidità e sporcizia.

**DOWN TUBE EXIT**

Assicura che i cavi instradati internamente e le ruote possano muoversi liberamente senza causare alcun problema restando facilmente accessibili al servizio.

**NANO MATRIX CARBON**

Le forcelle in carbonio assorbono in modo eccezionale gli urti e sono precise nelle sterzate. Tutte le bici da strada dispongono di forcelle completamente in carbonio; gli steli della forcella e dello sterzo sono fatti interamente in carbonio.

**NACA FASTBACK PROFILE**

Le aerodinamiche si basano sul profilo tagliato a goccia NACA0028 (National Advisory Committee for Aeronautics). I flussi d'aria che passano intorno al tubo danno l'idea che ci sia ancora la parte posteriore che invece è stata rimossa per ottimizzare il peso con meno materiale.

**AWS – ANTI WRINKLE SYSTEM**

Quando si creano gli elementi individuali del carbonio, viene utilizzata una sacca gonfiabile per assicurare che non si formino grinze all'interno del tubo, dato che queste possono aggiungere peso e creare difetti. In questo modo otteniamo un telaio più leggero, più rigido e più resistente.

**X-TAPER HEADTUBE**

Usando un tubo sterzo affusolato con cuscinetti superiori da 1 1/8" e quelli inferiori da 1 1/4" e 1 1/2" si ottiene un'ottima rigidità e un'affidabile precisione in sterzata.

**THERMO GATE**

Specifically located openings near the head tube which work like a chimney and allow the warm air to dissipate to guarantee the optimum operating temperature of the internal battery. The THERMO GATE enables the battery to perform at its best, in any condition.

**Prolite 66
Triple Butted Aluminium**

Il nostro alluminio collaudato di alta gamma (6066) è estremamente leggero e durevole. Con le pareti a triplo spessore e la tecnologia a idroformatura, possiamo regolare i tubi in alluminio per dare il migliore rapporto rigidità/peso.

**SUPERLITE 16
ALUMINIUM**

Il nostro ultimo grado di alluminio (6016) permette di avere pareti super sottili ma incredibilmente resistenti, ideali per un uso fuori strada o agonistico.

**RACELITE 61
ALUMINIUM**

Noi usiamo come grado minore di alluminio il 6061. Il vantaggio di questo alluminio è che permette di realizzare telai più leggeri e più evoluti. Usiamo un ulteriore trattamento di calore e delle pareti a doppio spessore per realizzare telai leggeri e resistenti.

**HYDRO FORMING SYSTEM (HFS)**

I tubi vengono inseriti in stampi negativi e un'emulsione a pressione di acqua calda e olio permette loro di essere modellati in forme complesse.

**TECHNO FORMING SYSTEM (TFS)**

La tecnoformatura è un processo meccanico che dà forma ai tubi usando stampi negativi, a volte combinati con un nucleo interno in metallo.

**SMOOTH WELDING**

Chiamata anche 'saldatura a doppio passaggio', si effettua un secondo passaggio sulla saldatura per dare un aspetto più organico e pulito al telaio. Al primo impatto penserai sia fibra di carbonio, non alluminio.

**RACE LINK**

Il nostro sistema di sospensioni posteriori a perno unico è stato ottimizzato per biciclette cross country e trasmissioni 1x. Il nostro carbonio rocker super leggero (80g) e il sistema di collegamento creano una "coda posteriore" leggera ed efficiente eliminando l'oscillazione del pedale..

**FLOAT LINK REAR SUSPENSION**


Il supporto inferiore si muove insieme al sistema e offre caratteristiche di risposta molto sensibili. I nostri ingegneri sono in grado di influenzare in modo ottimale il rapporto trasmissione/progressione. In pratica, un "collegamento flottante" posteriore fa sembrare di avere più corsa di quanto non ci sia in realtà.

**DI2 READY**

Le bici e i telai con il simbolo "Di2 Ready" sono perfettamente predisposti per l'installazione della tecnologia Di2 con il montaggio della batteria nel reggisella e nella forcella..

**INTERNAL CLAMP**

La progettazione di strumenti di lavoro di alto livello per una squadra WorldTour è simile al lavoro di una squadra di Formula 1: anche ogni particolare apparentemente banale può alla fine tradursi in una frazione di secondo decisiva. Con il bloccaggio del reggisella integrato si minimizzano le vibrazioni sul tubo orizzontale e.

**SLIDER DROPOUT**

The slider dropout offers plenty of horizontal adjustment for smooth and easy chain tensioning of hub gear systems, without the need of an added chain tensioner. Its voluminous design offers optimum frame stiffness.

**K-MOUNT**

Attacco sul fodero basso posteriore integrato per adattarsi al cavalletto posteriore.

**INTERNAL BLOCK**

La nuova versione del "Blocco interno" è incorporata direttamente nel telaio e impedisce alla corona della forcella di colpire il telaio in caso di incidente o angolo di sterzata estremo. Come protezione aggiuntiva, ci sono paraurti in gomma aggiuntivi sul telaio per evitare danni al telaio dalla corona della forcella.

**ENERGY GUARD**

Una protezione perfetta per la batteria interna. Lo strato più morbido (esterno) riduce i rumori, sigilla perfettamente il tubo obliquo e assorbe facilmente i colpi dai detriti della scia, mentre lo strato più duro (interno) assicura che la batteria non si danneggi e le dia la forma strutturale. Tutte le parti critiche come il cinturino in gomma e gli o-ring per un montaggio perfetto possono essere sostituiti.

**FLIP FLOP HEAD**

Le bici aerodinamiche offrono le prestazioni aerodinamiche migliori ma i dati eccellenti rilevati nella galleria del vento possono essere inutili se il ciclista non è in grado di posizionarsi in modo corretto sulla bici. La testa 'Flip Flop' per la sella è in grado di ottimizzare gli angoli della sella per un maggiore comfort.

**F-MOUNT**

Le bici equipaggiate con l'F-Mount hanno gli adattatori per i parafanghi integrati (alcune biciclette richiedono modelli di parafanghi specifici), per un montaggio più facile e veloce.

**REMOVABLE F-MOUNT**

Un ponte rimovibile per donare alla tua bicicletta un aspetto più pulito ma pronto per essere accessoriata con i parafanghi

**C-MOUNT**

Le bici equipaggiate con il C-Mount hanno già integrati i punti di fissaggio per il portapacchi (alcune biciclette richiedono modelli di portapacchi specifici), rendendo il montaggio più facile, veloce e affidabile.

**DISC COOLER**

Un componente di alluminio forgiato sotto la pinza del freno anteriore e di quello posteriore, permette al calore di dissipare attraverso le alette di raffreddamento CNC-milled. I test ci mostrano che le temperature sono ridotte di circa il 35% e i tempi di raffreddamento sono ridotti, ottimizzando così le prestazioni dei freni.

**CASTING MOTOR BRACKET**

La forma ricercata dovuta alla tecnologia di colata, dona non solo un aspetto compatto ed estremamente resistente, ma allo stesso tempo unisce il motore della e-bike al telaio per prestazioni migliori.

**NON-SLIP TIGHTENING**

I bulloni possono essere fissati tramite una chiave TORX 30 da un solo lato, senza correre il rischio che il lato opposto scivoli o giri, consentendo un serraggio più rapido e semplice.



FULL SUSPENSION · HARDTAILS

MOUNTAIN BIKES

In una delle discipline più faticose ed impegnative, la nostra esperienza di produzione e creazione di oltre 47 anni ci permette di offrire la garanzia a vita sul telaio. Stare all'aperto è un vantaggio per tutte le forme di ciclismo, ma essere in grado di portare la bici fuori strada è un'esperienza unica.



ONE-TWENTY 9. 8000

SIGNATURE SILVER/BLACK



CF4 Full carbon frame incorporating 'Nano Matrix' technology for additional impact resistance. 'Smart Entry' cable clamping system for rattle free running. Tapered head tube for precise steering, Boost standard and rear through axle for rear end stiffness. Floating rear shock provides 120 mm of travel.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAIO	ONE-TWENTY CFA
MISURE TELAIO	S, M, L, XL
FORCELLA	Rock Shox Pike Ultimate, Air, 130mm suspension travel, Tapered, 42mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Ultimate, platform
CAMBIO	Sram X01 Eagle
COMANDI	no / Sram X01 Eagle
LEVE FRENO	attached
FRENI	Sram Code RSC, 4 piston
GUARNITURA	Sram Descendant Carbon Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram GX Eagle
MOZZO A.	attached
MOZZO P.	MERIDA COMP TR, including removable lever, 6/4mm allen key
CERCHI	XM 1501 SPLINE ONE 30, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, 6 bolt, Sram XD, material: aluminium
PACCO PIGNONI	Sram XG-1295 Eagle, 10-50 teeth, 12 speed

COPERTONE A.	Maxxis Minion DHR II, 29.5x2.4", fold, TR EXO 3C
COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	attached
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA TEAM TR, material: carbon, 760mm width, 22mm rise
SERIE STERZO	FSA NO.47/50CF
CANNOTTO REGGISELLA	KS LEV Integra, 30.9mm diameter, 0mm setback, S 125mm travel seatpost - M/L/XL 150mm travel seatpost
SELLA	MERIDA Expert CC
PESO	12.68 Kg
PREZZO	6.990€



ONE-TWENTY 9.7000

GLOSSY RACE RED/BLACK (BLACK)



CF4 Full carbon frame incorporating 'Nano Matrix' technology for additional impact resistance. 'Smart Entry' cable clamping system for rattle free running. Tapered head tube for precise steering. Boost standard and rear through axle for rear end stiffness. Floating rear shock provides 120 mm of travel.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-TWENTY CFA
MISURE TELAI	S, M, L, XL
FORCELLA	Rock Shox Pike Select, Air, 130mm suspension travel, Tapered, 42mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano SL-MT800-IL
LEVE FRENO	attached
FRENI	Shimano XT, 4 piston
GUARNITURA	Shimano XT, 10-51 teeth, 12 speed
CATENA	Shimano XT
MOZZO A.	Shimano XT, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano XT, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminum
PACCO PIGNONI	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
COPERTONE A.	Maxxis Minion DHR II, 29.5x2.4", fold, TR EXO 3C

COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0°stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 760mm width, 20mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0mm setback, S: 125mm travel seatpost - M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC
PESO	13.58 Kg
PREZZO	4.290€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY
C-S POST
MOUNT DISC



D2
READY



BOOST 12-148
THROUGH
AXLE



NANO
MATRIX
CARBON



AWS
ANTI
WRINKLE
SYSTEM



FLOAT
LINK
REAR
THROUGH
AXLE



NON-SLIP
TIGHTENING

ONE-TWENTY 9. 3000

GLOSSY BLACK/MATT BLACK



CFA Triangolo anteriore in carbonio con tecnologia "Nano Matrix" per una maggiore resistenza abbinata ad un'estremità posteriore in alluminio 6066 triplo spessore idroformato. Sistema di serraggio del cavo "Smart Entry" per una corsa senza rumore. Tubo sterzo conico per uno sterzo e un boost precisi asse passante posteriore standard per la rigidità dell'estremità posteriore. L'ammortizzatore posteriore flottante offre 120 mm di escursione.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAIO	ONE-TWENTY CFA
MISURE TELAIO	S, M, L, XL
FORCELLA	Rock Shox Revelation RC, Air, 130mm suspension travel, Tapered, 42mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-500, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Minion DHR II, 29.5x2.4", fold, TR EXO 3C
COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 760mm width, 20mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Expert CC
PESO	14.09 Kg
PREZZO	3.390€



ONE-TWENTY 9. 600

SILK SPARKLING BLUE (BLUE)



LITE Telaio leggero in alluminio serie 6066 triplo spessore e idroformato con "Saldatura uniforme" e passaggio cavi interno. Tubo sterzo conico per una sterzata precisa, boost standard e perno passante posteriore per la rigidità della parte posteriore. L'ammortizzatore galleggiante fornisce 120 mm di corsa.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-TWENTY LITE
MISURE TELAI	S-M-L-XL
FORCELLA	Rock Shox Sektor RL, Air 130mm suspension travel, Tapered, 42mm fork offset
AMMORTIZZATORE	SHOCK Rock Shox Deluxe Select+, lockout
CAMBIO	Sram NX Eagle
COMANDI	Sram NX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-500, 2 piston
GUARNITURA	Sram NX Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram NX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1230 Eagle, 11-50 teeth, 12 speed
COPERTONE A.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual

COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 760mm width, 20mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.64 Kg
PREZZO	2.390€



ONE-TWENTY 9. 400

GLOSSY GREEN (BLACK)



LITE Telaio leggero in alluminio serie 6066 triplo spessore e idroformato con "Saldatura uniforme" e passaggio cavi interno. Tubo sterzo conico per una sterzata precisa, boost standard e perno passante posteriore per la rigidità della parte posteriore. L'ammortizzatore galleggiante fornisce 120 mm di corsa.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-TWENTY LITE,
MISURE TELAI	S, M, L, XL
FORCELLA	Suntour XCR34 LOR, Air, 130mm suspension travel, Tapered, lockout, 51mm fork offset
AMMORTIZZATORE	Suntour Unair TR LOR8, lockout
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, 60 mm all sizes
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 740mm width, 10mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	15.05 kg
PREZZO	1.790€



ONE-TWENTY 9. 400

GLOSSY ANTHRACITE (SILVER)



LITE Telaio leggero in alluminio serie 6066 triplo spessore e idroformato con "Saldatura uniforme" e passaggio cavi interno. Tubo sterzo conico per una sterzata precisa, boost standard e perno passante posteriore per la rigidità della parte posteriore. L'ammortizzatore galleggiante fornisce 120 mm di corsa.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-TWENTY LITE,
MISURE TELAI	S, M, L, XL
FORCELLA	Suntour XCR34 LOR, Air, 130mm suspension travel, Tapered, lockout, 51mm fork offset
AMMORTIZZATORE	Suntour Unair TR LOR8, lockout
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
COPERTONE P.	Maxxis Forekaster, 29x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, 60 mm all sizes
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 740mm width, 10mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	15.05 kg
PREZZO	1.790€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2 READY



C-S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



FLOAT LINK
REAR
SUSPENSION




NON-SLIP
TIGHTENING

FRAME INTERFACES / GEOMETRIES

ONE-TWENTY

FRAME	CF4	CFA	LITE
MAX. WHEELSIZE	29x2.35"	29x2.35"	27.5x2.35" 29x2.35"
MAX. CHAINRING	1x34T	1x34T; 2x36/26T	1x34T; 2x36/26T
<hr/>			
HEAD TUBE			
TAPERED 1-1/8 - 1.5	•	•	•
<hr/>			
HEADSET			
INTEGRATED	•	•	•
<hr/>			
BRAKE STANDARD			
DISC BRAKE ON CHAIN STAY	•	•	•
POST MOUNT 180 MM REAR BRAKE	•	•	•
<hr/>			
BB-STANDARD			
BB 92	•	•	•
<hr/>			
SEATPOST DIAMETER			
30.9MM	•	•	•
<hr/>			
REAR DROPOUT-STANDARD			
E-THRU AXLE 12X148	•	•	•
<hr/>			
CABLE ROUTING			
INTERNAL SHIFTING CABLES	•	•	•
INTERNAL BRAKE CABLE	•	•	•
INTERNAL SEAT POST CABLE	•	•	•
<hr/>			
DI2-READY	•	•	•
<hr/>			
FD-STANDARD			
LOW DIRECT MOUNT		•	
SIDE SWING		•	
<hr/>			
FRAMEWEIGHT*	2105g	2560g	3020g
<hr/>			
RD HANGER		DH-053	

* Frame weight only at size M (+/- 3%); Without axle, frame protectors, saddle clamp, shock bolts, hanger, steerer cups and cable guides

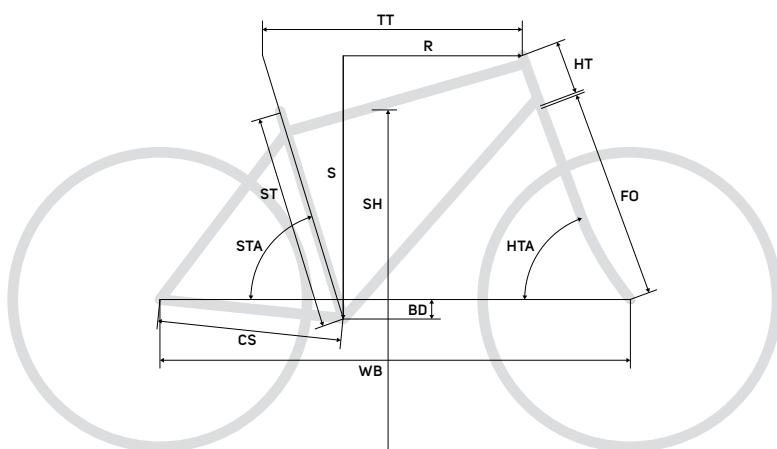

FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm]
 HTA head tube angle [°] STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm]
 FO fork length [mm] S stack [mm] R reach [mm] WB wheel base [mm]

ONE-TWENTY CF4

FS	S(16")	M(17.5")	L(19")	XL(20.5")
ST	400	440	480	520
TT	572	592	614.4	636.8
HT	95	95	105	115
HTA	67.3	67.3	67.3	67.3
STA	75.5	75.5	75.5	75.5
CS	435	435	435	435
BD	40	40	40	40
FO	541	541	541	541
S	607.1	607.1	616.3	625.5
R	415	435	455	475
WB	1140.7	1160.7	1184.6	1208.4

ONE-TWENTY CFA

FS	S(16")	M(17.5")	L(19")	XL(20.5")
ST	400	440	480	520
TT	572	592	614.4	636.8
HT	95	95	105	115
HTA	67.3	67.3	67.3	67.3
STA	75.5	75.5	75.5	75.5
CS	435	435	435	435
BD	40	40	40	40
FO	541	541	541	541
S	607.1	607.1	616.3	625.5
R	415	435	455	475
WB	1140.7	1160.7	1184.6	1208.4


ONE-TWENTY LITE

TS	27.5"	27.5"	29"	29"	29"	29"
FS	S(16")	M(17.5")	S(16")	M(17.5")	L(19")	XL(20.5")
ST	400	440	400	440	480	520
TT	570.6	593.1	572	592	614.4	636.8
HT	105	115	95	95	105	115
HTA	66.8	66.8	67.3	67.3	67.3	67.3
STA	75	75	75.5	75.5	75.5	75.5
CS	430	430	435	435	435	435
BD	21	21	40	40	40	40
FO	522	522	541	541	541	541
S	580.8	590	607.1	607.1	616.3	625.5
R	415	435	415	435	455	475
WB	1130.1	1154.1	1140.7	1160.7	1184.6	1208.4

ONE-TWENTY CF4

MM	SHAFT EYELET PIN WIDTH	PIN ID	● BODY EYELET PIN WIDTH	PIN ID
185 x 55 mm	-	-	40 mm	10 mm


Recommended SAG: 25-30%

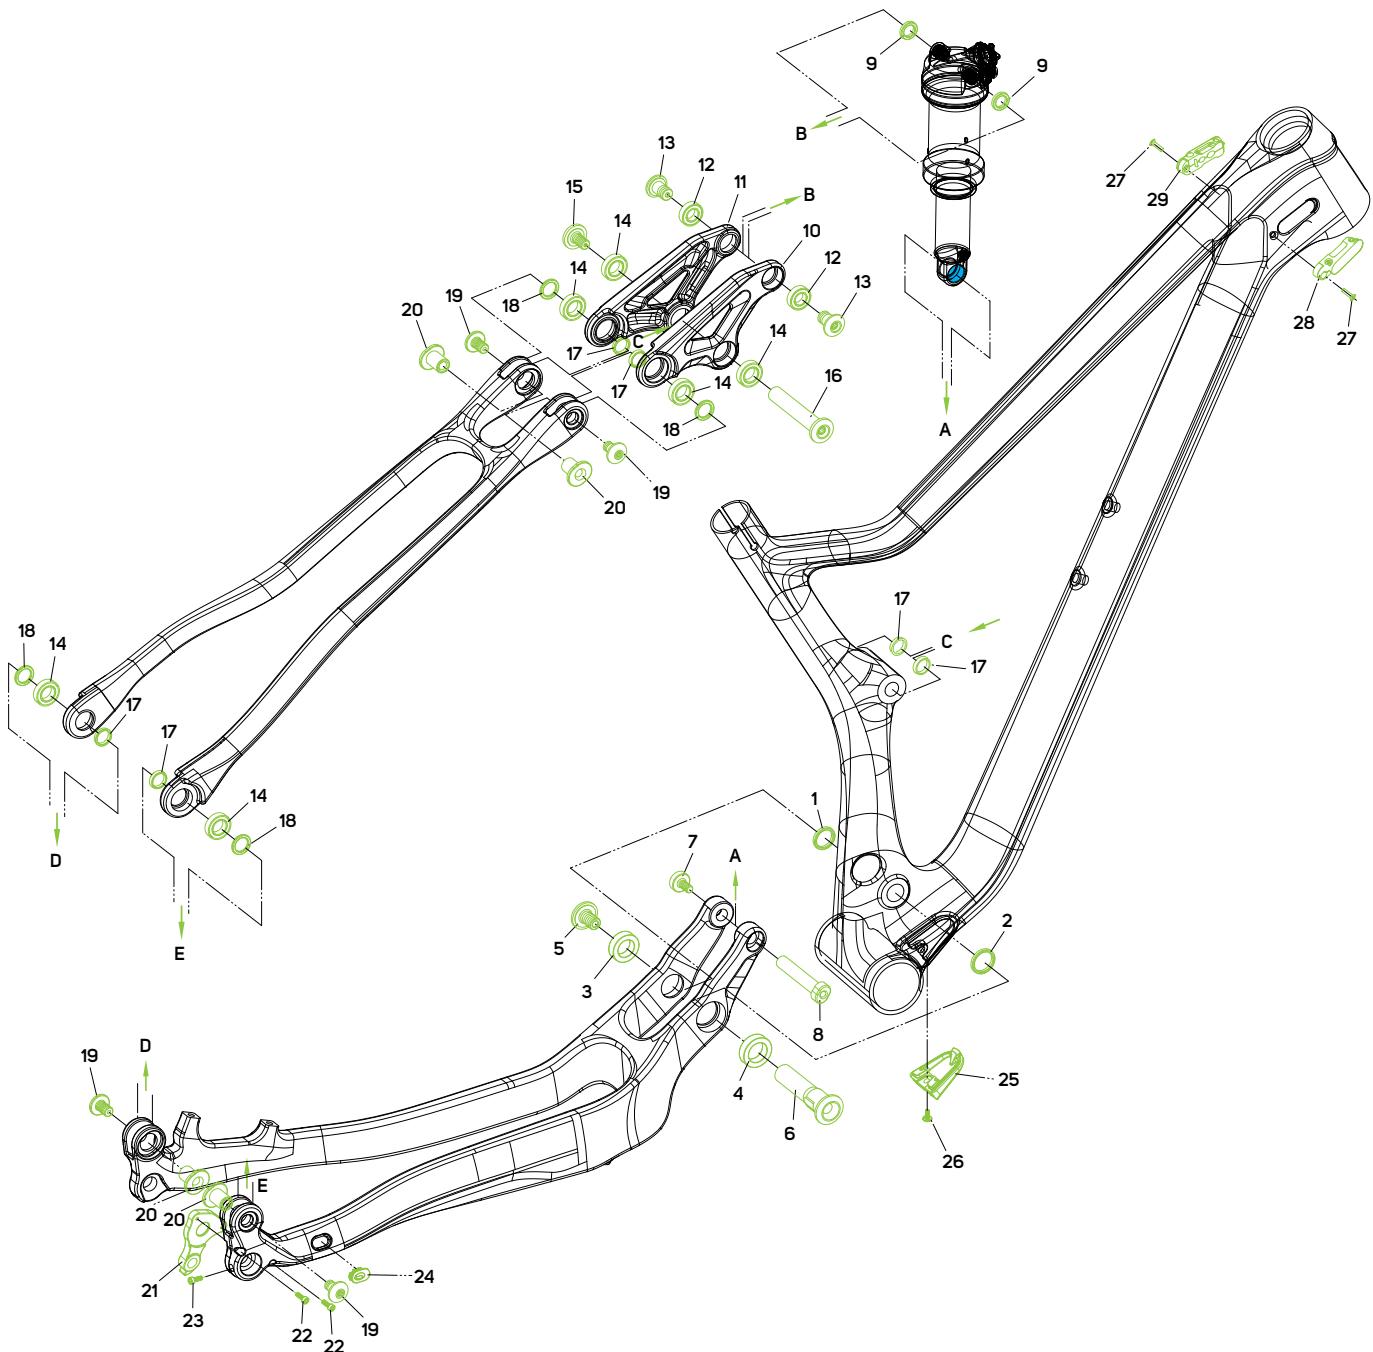

ONE-TWENTY CFA

MM	SHAFT EYELET		BODY EYELET	
	PIN WIDTH	PIN ID	PIN WIDTH	PIN ID
185 x 55 mm	-	-	40 mm	10 mm


Recommended SAG: 25-30%

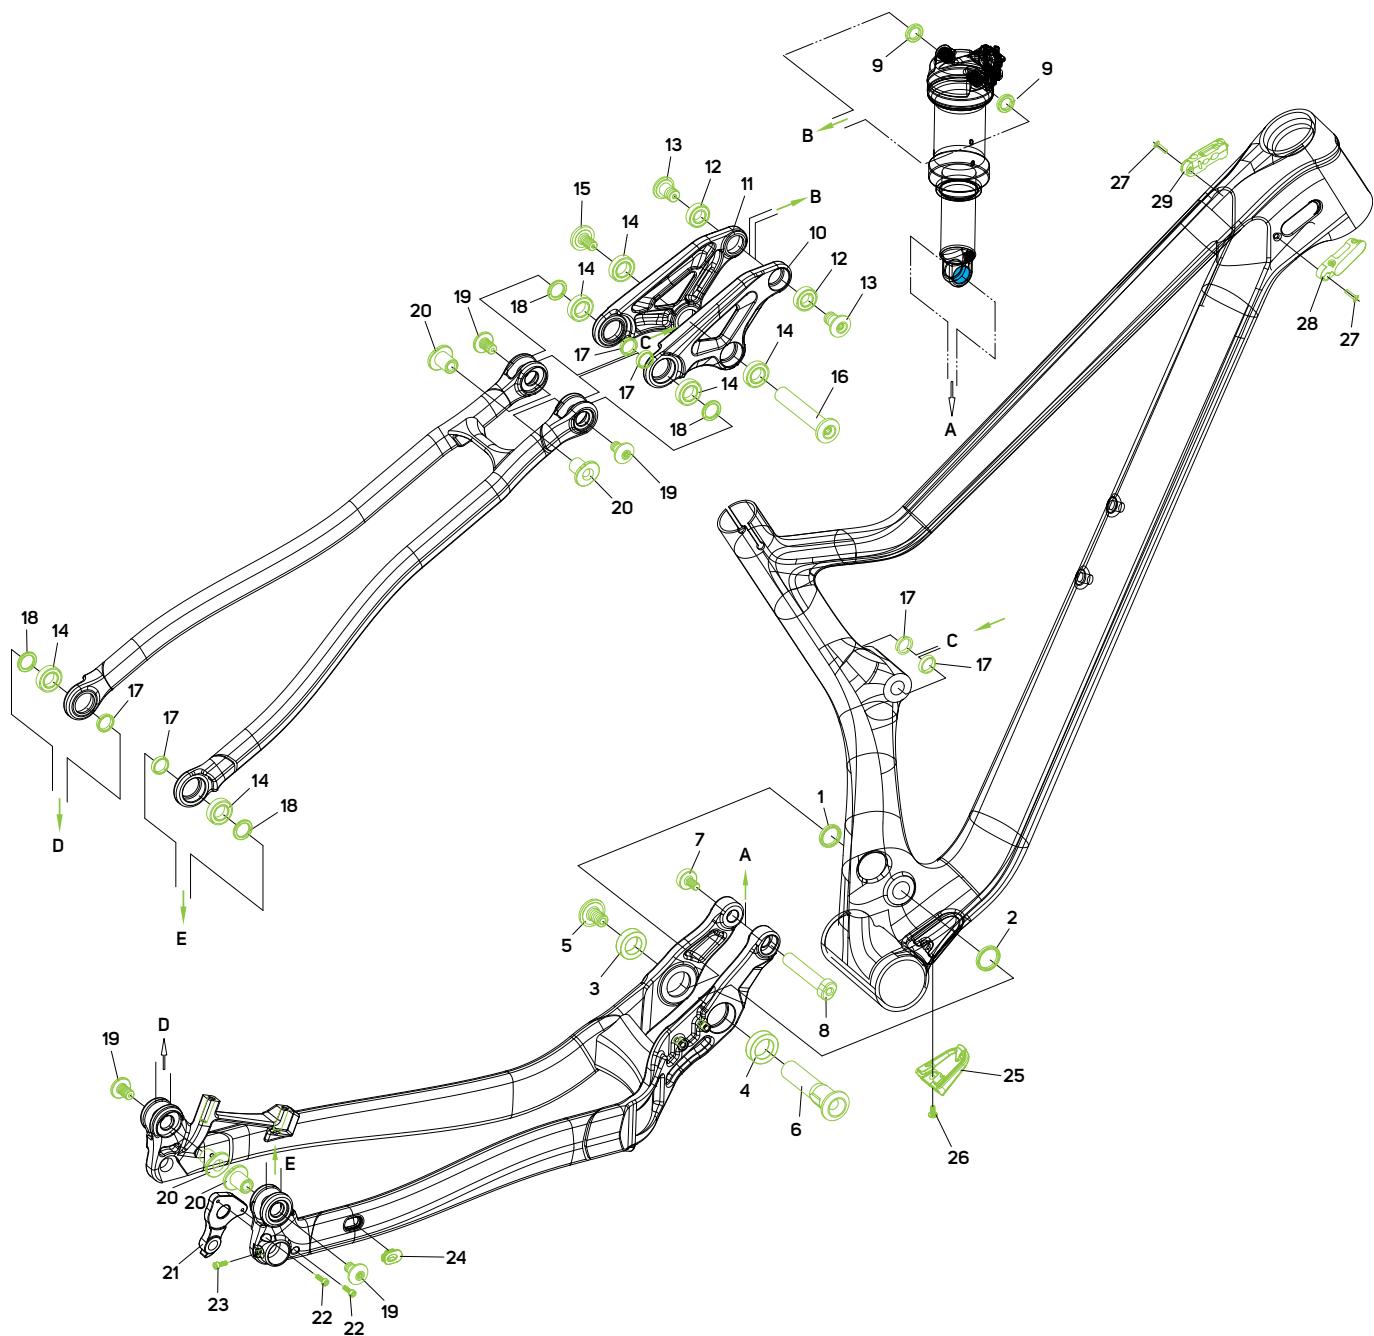

ONE-TWENTY ALUMINIUM

MM	SHAFT EYELET PIN WIDTH	PIN ID	● BODY EYELET PIN WIDTH	PIN ID
	-	-	40 mm	10 mm
185 x 55 mm	-	-	40 mm	10 mm

Recommended SAG: 25-30%

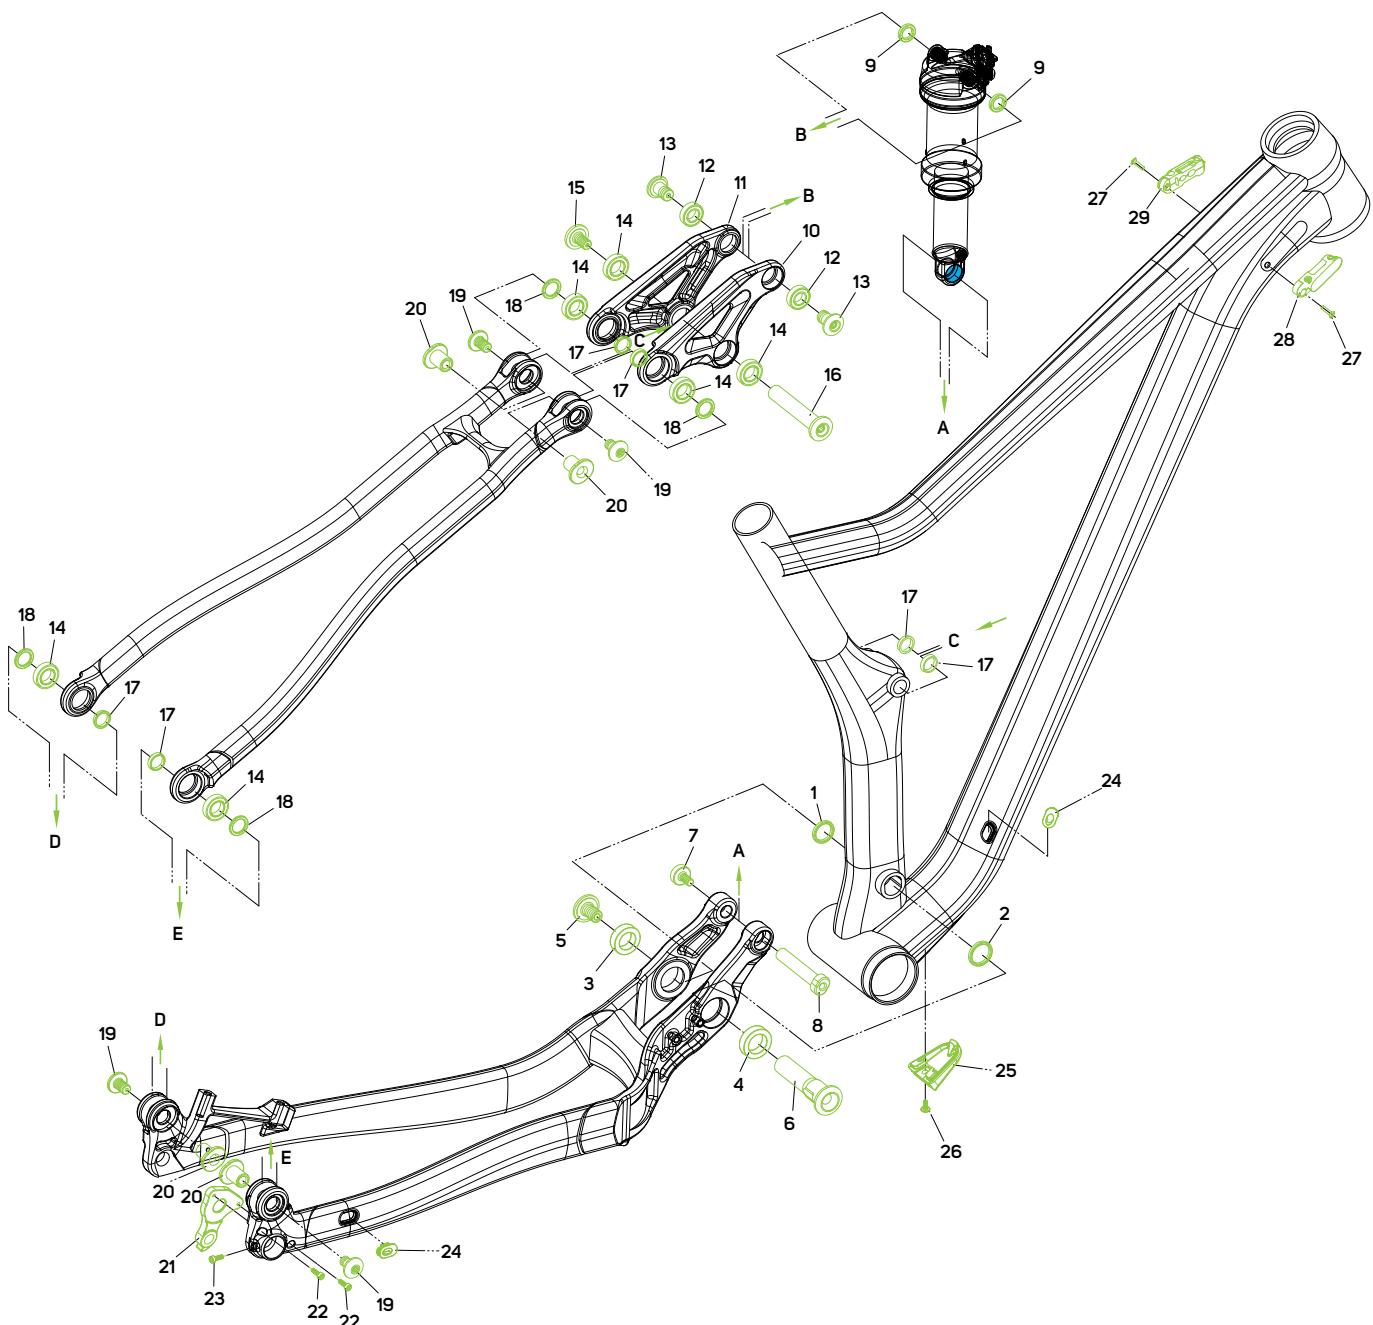

ONE-FORTY 900

MATT BLACK/GLOSSY CANDY GREEN



Tubi leggeri in alluminio idroformato a triplo spessore serie 6016 con saldatura liscia. Tubo sterzo conico e bullone standard. Boost attraverso gli assi per una movimentazione precisa. Instradamento dei cavi "Smart Entry" per un funzionamento senza rumore.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAO	S-M-L-XL
FORCELLA	Rock Shox Pike Ultimate, Air, 150mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano XT
LEVE FRENO	attached
FRENI	Shimano XT, 4 piston
GUARNITURA	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano XT
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	XI 1501 SPLINE ONE 30, 110x15mm width front hub, 148x12mm material: aluminium
PACCO PIGNONI	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
COPERTONE A.	Maxxis Minion DHR II, 27.5x2.6", fold, TR EXO 3C

COPERTONE P.	Maxxis Rekon, 27.5x2.6", fold, TR EXO Dual
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0mm setback, S: 125mm travel seatpost - M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC
PESO	13.28 kg
PREZZO	4.390€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY
D12
READY



C.S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-FORTY 800

GLOSSY BLACK/MATT DARK GREY



Tubi leggeri in alluminio idroformato a triplo spessore serie 6016 con saldatura liscia. Tubo sterzo conico e bullone standard. Boost attraverso gli assi per una movimentazione precisa. Instradamento dei cavi "Smart Entry" per un funzionamento senza rumore.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAIO	S-M-L-XL
FORCELLA	Rock Shox Pike Select, Air, 150mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Sram GX Eagle
COMANDI	Sram GX Eagle
LEVE FRENO	attached
FRENI	Sram Code R, 4 piston
GUARNITURA	Sram Descendant 6K Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram GX Eagle
MOZZO A.	Bearpaws BMB-003, 110x15mm width front hub, 32 spoke holes, 6 bolt
MOZZO P.	Bearpaws BMB-004, 148x12mm width rear hub, 32 spoke holes, 6 bolt, Sram XD
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram XG-1275 Eagle, 10-50 teeth, 12 speed

COPERTONE A.	Maxxis Minion DHR II, 27.5x2.6", fold, TR EXO 3C
COPERTONE P.	Maxxis Rekon, 27.5x2.6", fold, TR EXO Dual
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	MERIDA M2339 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0mm setback, S: 125mm travel seatpost - M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC
PESO	14.03 kg
PREZZO	3.190€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2
READY



C-S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-FORTY 700

GLOSSY X'MAS RED/MATT RED



Lightweight 6016 series triple butted hydroformed aluminium tubes with smooth welding. Tapered head tube and Boost standard bolt through axles for precise handling. 'Smart Entry' cable routing for rattle free running.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAO	S-M-L-XL
FORCELLA	Rock Shox Revelation RC, Air, 150mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano SL -MT800-IL
LEVE FRENO	attached
FRENI	Shimano SLX M7120, 4 piston
GUARNITURA	Shimano SLX, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano SLX, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano SLX, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Minion DHR II, 27.5x2.6", fold, TR EXO 3C

COPERTONE P.	Maxxis Rekon, 27.5x2.6", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	FSA NO.47/50
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0mm setback, S: 125mm travel seatpost - M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.28 kg
PREZZO	2.990€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY
D12
READY



C.S. POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-FORTY 600

METALLIC BLACK/WHITE



Lightweight 6016 series triple butted hydroformed aluminium tubes with smooth welding. Tapered head tube and Boost standard bolt through axles for precise handling. 'Smart Entry' cable routing for rattle free running.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAI	S-M-L-XL
FORCELLA	Rock Shox Sektor RL, Air, 150mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Deluxe Select+, lockout
CAMBIO	Sram NX Eagle
COMANDI	Sram NX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-500, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram NX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1230 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Minion DHR II, 27.5x2.6", fold, TR EXO 3C
COPERTONE P.	Maxxis Rekon, 27.5x2.6", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	MERIDA M2339 Neck
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.71 kg
PREZZO	2.390€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2 READY



C-S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-FORTY 400

LIGHT GREEN/GLOSSY BLUE



Lightweight 6016 series triple butted hydroformed aluminium tubes with smooth welding. Tapered head tube and Boost standard bolt through axles for precise handling. 'Smart Entry' cable routing for rattle free running.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAO	S-M-L-XL
FORCELLA	Suntour Aion35 EVO LOR, Air, 150mm suspension travel, Tapered, Lockout, 51mm fork offset
AMMORTIZZATORE	Suntour Unair TR LOR8, lockout
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Forekaster, 27.5x2.35", fold, TR EXO Dual
COPERTONE P.	Maxxis Forekaster, 27.5x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, 6° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 740mm width, 10mm rise
SERIE STERZO	MERIDA M2339 Neck
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.39 kg
PREZZO	1.990€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY
DI2 READY



C-S POST
MOUNT DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-FORTY 400

SILK BLACK/ANTHRACITE



Lightweight 6016 series triple butted hydroformed aluminium tubes with smooth welding. Tapered head tube and Boost standard bolt through axles for precise handling. 'Smart Entry' cable routing for rattle free running.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-FORTY LITE
MISURE TELAI	S-M-L-XL
FORCELLA	Suntour Aion35 EVO LOR, Air, 150mm suspension travel, Tapered, Lockout, 51mm fork offset
AMMORTIZZATORE	Suntour Unair TR LOR8, lockout
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Forekaster, 27.5x2.35", fold, TR EXO Dual
COPERTONE P.	Maxxis Forekaster, 27.5x2.35", fold, TR EXO Dual
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, 6° stem angle, 50 mm all sizes
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 740mm width, 10mm rise
SERIE STERZO	MERIDA M2339 Neck
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.39 kg
PREZZO	1.990€



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2 READY



C-S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM




FLOAT LINK
REAR
SUSPENSION

ONE-FORTY

FRAME	ONE-FORTY
MAX. WHEELSIZE	27.5x2.6"
MAX. CHAINRING	1x34T
HEAD TUBE	
TAPERED 1 1/8 - 1.5	•
HEADSET	
SEMI-INTEGRATED (44-55 MM)	•
BRAKE STANDARD	
DISC BRAKE ON CHAIN STAY	•
POST MOUNT 180MM REAR BRAKE	•
BB-STANDARD	
BB 92	•
SEATPOST DIAMETER	
30.9 MM	•
REAR DROPOUT-STANDARD	
BOOST 12X148	•
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
INTERNAL SEAT POST CABLE	•
DI2-READY	•
FD-STANDARD	1x specific
FRAMEWEIGHT*	3040g
RD HANGER	DH-053

* Frame weight only at size M (+/- 3%); Without axle, frame protectors, saddle clamp, shock bolts, hanger, steerer cups and cable guides

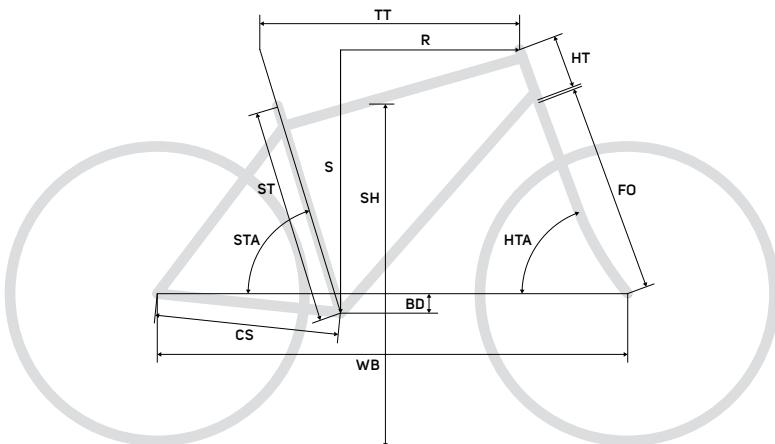


ONE-FORTY

FS	S	M	L	XL
ST seat tube [mm]	410	435	475	515
TT top tube [mm]	572.4	596	619.7	643.4
HT head tube [mm]	95	110	125	140
HTA head tube angle [°]	66.3	66.3	66.3	66.3
STA seat tube angle [°]	75	75	75	75
CS chain stay length [mm]	435	435	435	435
BD bottom braced drop [mm]	21	21	21	21
FO fork length [mm]	542	542	542	542
S stack [mm]	587.4	601.1	614.9	628.6
R reach [mm]	415	435	455	475
WB wheel base [mm]	1144	1170	1194	1222

ONE-FORTY ALUMINIUM

MM	SHAFT EYELET		BODY EYELET	
	PIN WIDTH	PIN ID	PIN WIDTH	PIN ID
185 x 55 mm	-	-	40 mm	10 mm

Recommended SAG: 30-35%

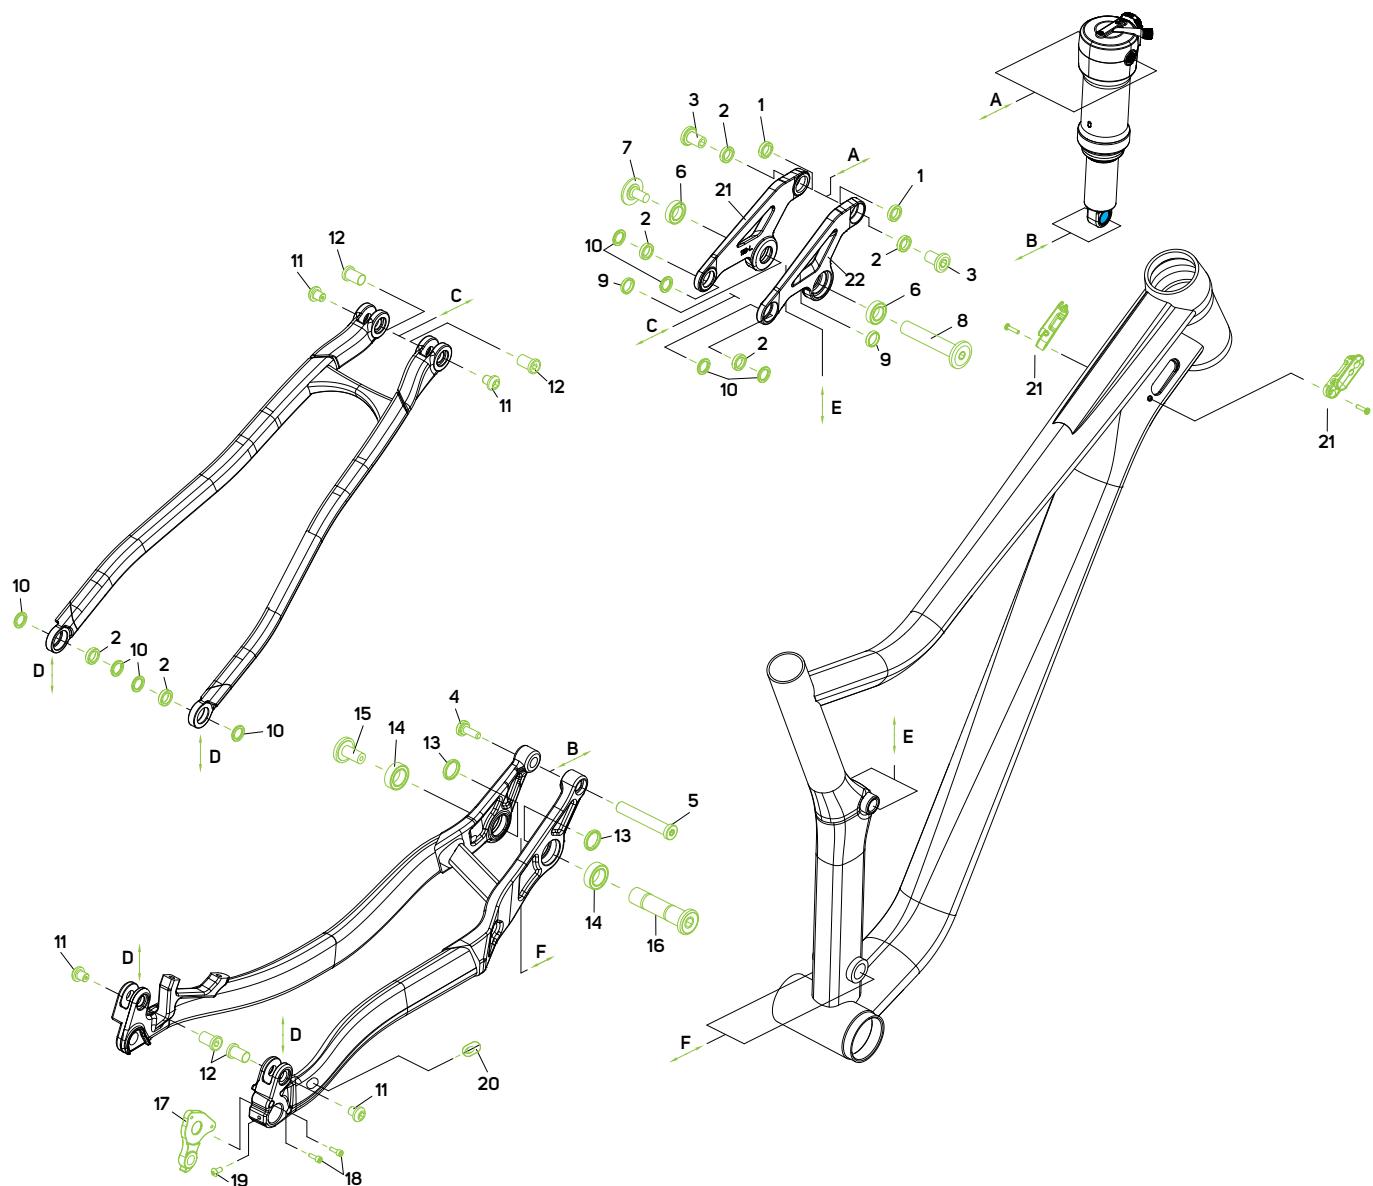

ONE-SIXTY 3000

FLASHY GREEN/GLOSSY BLACK



CFA Telaio principale in carbonio abbinato ad un triangolo posteriore in alluminio 6016 con una geometria enduro aggressiva. Il tubo sterzo conico e l'asse Boost standard offrono ruote robuste e maneggevolezza precisa. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. Movimento centrale BB92 per trasferimento di potenza super efficiente e ammortizzatore posteriore flottante con corsa di 165 mm.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAIO	ONE-SIXTY CFA
MISURE TELAIO	S-M-L
FORCELLA	Rock Shox Yari RC, Air, 170mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Super Deluxe Select
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-520, 4 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Assegai, 27.5x2.5", fold, TR EXO+ 3C MaxxTerra
COPERTONE P.	Maxxis Minion DHR II, 27.5x2.4", fold, TR EXO+ 3C MaxxTerra
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 40 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	FSA NO.57/55E neck
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	14.51 kg
PREZZO	3.790€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



D12
READY



C-POST
MOUNT
DISC



BOOST 12/148
THROUGH
AXLE



NANO
MATRIX
CARBON



AWS
ANTI WRINKLE
SYSTEM



BOOST 15-110
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-SIXTY 700

GLOSSY ANTHRACITE/BLACK



LITE Telaio in alluminio leggero a triplo spessore e idroformato serie 6066 con saldatura liscia. Bilanciere full carbon per una rigidità ancora maggiore e un peso ridotto. Tubo sterzo conico e bullone standard Boost attraverso gli assi per una movimentazione precisa. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-SIXTY LITE
MISURE TELAI	S, M, L, XL
FORCELLA	Rock Shox Yari RC, Air, 170mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Super Deluxe Select+, platform
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano XT
LEVE FRENO	attached
FRENI	Shimano SLX M7120, 4 piston
GUARNITURA	Race Face Aeffect, 32 teeth, 170 mm-S up
CATENA	Shimano SLX
MOZZO A.	Shimano SLX, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano SLX, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed

COPERTONE A.	Maxxis Assegai, 27.5x2.5", fold, TR EXO+ 3C MaxxTerra
COPERTONE P.	Maxxis Minion DHR II, 27.5x2.4", fold, TR EXO+ 3C MaxxTerra
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT TR, material: aluminium, 35mm diameter, 0° stem angle, 40 mm all sizes
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	FSA NO.57/55E neck
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0mm setback, S: 125mm travel seatpost - M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC
PESO	14.81 kg
PREZZO	3.290€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2
READY



C-S POST
MOUNT
DISC



BOOST 12-148
THROUGH
AXLE



SUPERLITE 16
ALUMINUM



FLOAT LINK
REAR
SUSPENSION

ONE-SIXTY 400

SILK TITAN/BLACK



LITE Telaio in alluminio leggero a triplo spessore e idroformato serie 6066 con saldatura liscia. Bilanciere full carbon per una rigidità ancora maggiore e un peso ridotto. Tubo sterzo conico e bullone standard Boost attraverso gli assi per una movimentazione precisa. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	ONE-SIXTY LITE
MISURE TELAI	S-M-L-XL
FORCELLA	Rock Shox 35 Gold RL, Air, 160mm suspension travel, Tapered, 37mm fork offset
AMMORTIZZATORE	Rock Shox Super Deluxe Select
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-520, 4 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed

COPERTONE A.	Maxxis Assegai, 27.5x2.5", fold, TR EXO+ 3C MaxxTerra
COPERTONE P.	Maxxis Minion DHR II, 27.5x2.4", fold, TR EXO+ 3C MaxxTerra
MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
MANUBRIO	MERIDA EXPERT TR, material: aluminium, 780mm width, 20mm rise
SERIE STERZO	FSA NO.57/55E neck
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0mm setback, S: 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC
PESO	15.41 kg
PREZZO	2.590€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



SMART
ENTRY



DI2
READY



C-POST
MOUNT
DISC



BOOST 12x148
THROUGH
AXLE



SUPERLITE 16
ALUMINUM




FLOAT LINK
REAR
SUSPENSION



ONE-SIXTY

FRAME	CFA	LITE
MAX. WHEELSIZE	27.5x2.6"	27.5x2.6"
MAX. CHAINRING	1x34T	1x34T
HEAD TUBE		
TAPERED 1 1/8" - 1.5"	•	•
HEADSET		
SEMI-INTEGRATED (44-55 MM)	•	•
BRAKE STANDARD		
DISC BRAKE ON CHAIN STAY	•	•
POST MOUNT 180MM REAR BRAKE	•	•
BB-STANDARD		
BB 92	•	•
SEATPOST DIAMETER		
30.9 MM	•	•
REAR DROPOUT-STANDARD		
THRU AXLE 12X148 MM	•	•
CABLE ROUTING		
INTERNAL SHIFTING CABLES	•	•
INTERNAL BRAKE CABLE	•	•
INTERNAL SEAT POST CABLE	•	•
ISCG 05	•	•
FD-STANDARD	1x specific	1x specific
FRAMEWEIGHT	2400g in size M +/- 3%	3017g in size M +/- 3%
RD HANGER	DH-053	

* Frame weight only! Without axle, frame protectors, saddle clamp, shock bolts, hanger, steerer cups and cable guides

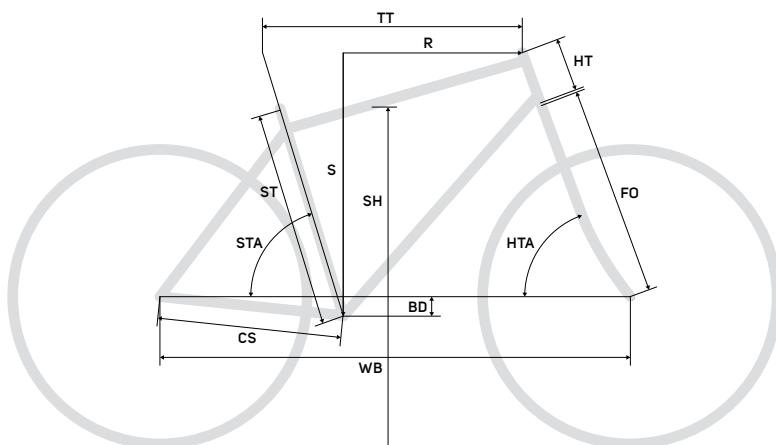

ONE-SIXTY CFA

FS	S	M	L
ST seat tube [mm]	400	430	470
TT top tube [mm]	563	597	632
HT head tube [mm]	100	110	125
HTA head tube angle [°]	65.3	65.3	65.3
STA seat tube angle [°]	75	75	75
CS chain stay length [mm]	430	430	430
BD bottom bracket drop [mm]	6	6	6
FO fork length [mm]	562	562	562
S stack [mm]	592	601	614
R reach [mm]	415	445	475
WB wheel base [mm]	1166	1201	1237


ONE-SIXTY LITE

S	M	L	XL
400	430	470	490
559	591	630	648
105	110	125	130
65.3	65.3	65.3	65.3
75	75	75	75
430	430	430	430
6	6	6	6
562	562	562	562
595	599	613	617
410	440	474	490
1157	1189	1223	1247

ONE-SIXTY CARBON

MM	SHAFT EYELET PIN WIDTH	PIN ID	BODY EYELET PIN WIDTH	PIN ID
205 x 62.5mm	-	-	40 mm	8 mm

Recommended SAG: 30-35%

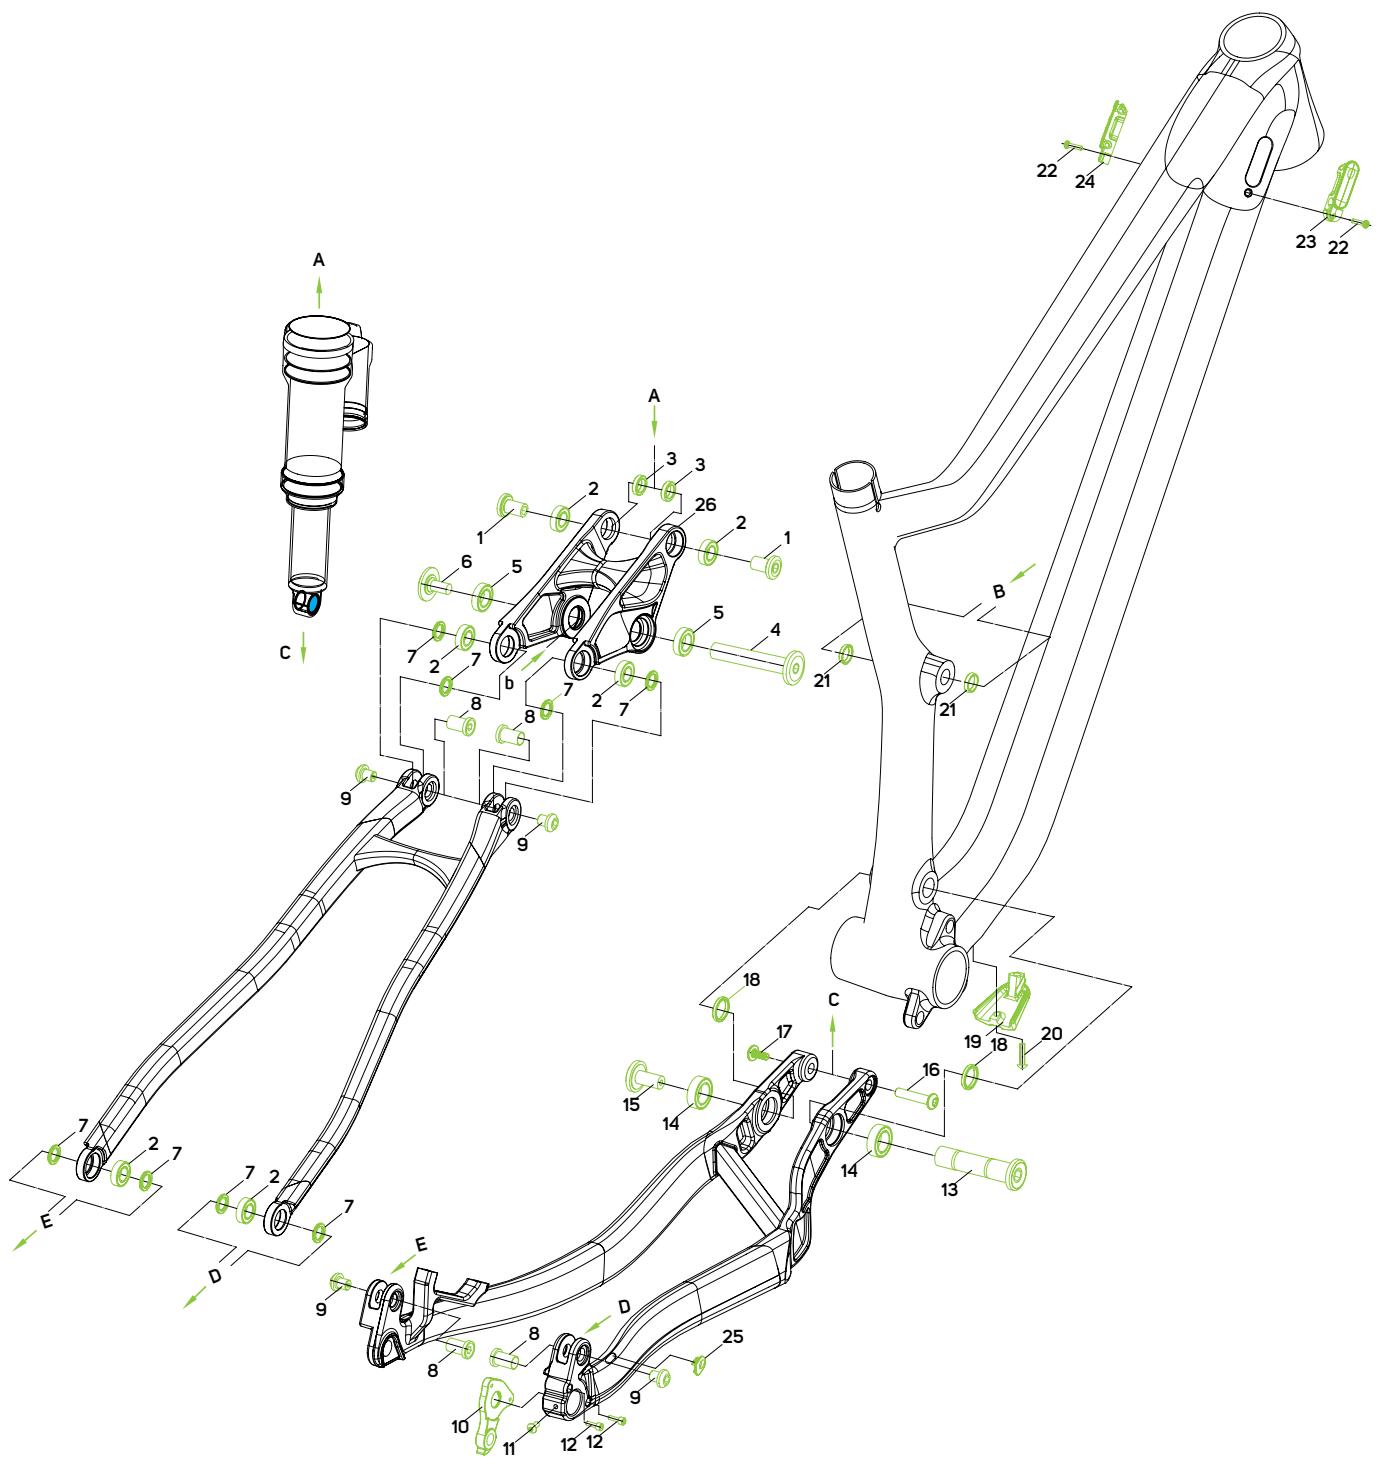

BIG.NINE 9000

MATT UD (GLOSSY GOLD)



CF5 Superleggero, utilizzando fibre di carbonio di altissima qualità e un nucleo in EPS (peso del telaio circa 880 g BIG.NINE - M, compresa la vernice) che lo rende uno dei telai più leggeri sul mercato. Tubo obliquo profilato Aero, catena profilata a balestra e reggisella aerodinamica per il massimo comfort. Aumenta lo sterzo conico per garantire rigidità e precisione di traiettoria. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF5
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Fox Factory 32 Float SC, Air, 100mm suspension travel, Tapered, Remote lockout, 44mm fork offset
CAMBIO	Shimano XTR Shadow+
COMANDI	Shimano XTR
LEVE FRENO	Shimano XTR
FRENI	Shimano XTR, 2 piston
GUARNITURA	Shimano XTR, 34 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano M9100
MOZZO A.	attached
MOZZO P.	attached
CERCHI	XRC 1200 Spline 25, 110x15mm width front hub, 148x12mm width rear hub, 25mm inner width, 6 Centerlock, Shimano 12 Speed, material: carbon
PACCO PIGNONI	Shimano XTR, 10-51 teeth, 12 speed
COPERTONE A.	Continental Race King 2.2, 29x2.2", fold, RaceSport
COPERTONE P.	Continental Race King 2.2, 29x2.2", fold, RaceSport
MANOPOLE	MERIDA Team CC

ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -17° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA TEAM CC, material: carbon, 720mm width, flat
SERIE STERZO	FSA NO.47/50CF
CANNOTTO REGGISELLA	MERIDA Team CC, material: carbon, 30.9mm diameter, 0mm setback, S-Flex
SELLA	Prologo Scratch 2
PESO	8.4 kg
PREZZO	6.990 €



BIG.NINE 8000

UD+TRANSPARENT GREEN (GREEN)



CF5 Superleggero, utilizzando fibre di carbonio di altissima qualità e un nucleo in EPS (peso del telaio circa 880 g BIG.NINE - M, compresa la vernice) che lo rende uno dei telai più leggeri sul mercato. Tubo obliquo profilato Aero, catena profilata a balestra e reggisella aerodinamica per il massimo comfort. Aumenta lo sterzo conico per garantire rigidità e precisione di traiettoria. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



29

TELAI	BIG.NINE CF5
MISURE TELAIO	S-M-L-XL-XXL
FORCELLA	Rock Shox SID Ultimate, Air, 100mm suspension travel, Tapered, Remote lockout, 42mm fork offset
CAMBIO	Sram X01 Eagle
COMANDI	Sram X01 Eagle
LEVE FRENO	attached
FRENI	Sram G2 RSC, 2 piston
GUARNITURA	SramX01 EagleSL,34 teeth,170 mm-S,175 mm-M up
CATENA	Sram XX1 Eagle
MOZZO A.	attached
MOZZO P.	attached
CERCHI	Reynolds TR 249, 110x15mm width front hub, 148x12mm width rear hub, 24mm inner width, Centerlock, Sram XD, material: carbon
PACCO PIGNONI	Sram XG-1295 Eagle, 10-50 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold, 3C
COPERTONE P.	Maxxis Ikon, 29x2.2", fold, 3C
MANOPOLE	MERIDA Team CC

ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -17° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA TEAM CC, material: carbon, 720mm width, flat
SERIE STERZO	FSA NO.47/50CF
CANNOTTO REGGISELLA	MERIDA Team CC, material: carbon, 30.9mm diameter, Omm setback, S-Flex
SELLA	Prologo Scratch 2
PESO	9.01 kg
PREZZO	5.990€



BIG.NINE 7000

MATT UD (GLOSSY BLACK)



CF3 Telaio in carbonio focalizzato XC (circa 1,29 kg BIG.NINE - M). Tubo obliquo profilato Aero, catena e reggisella profilata a balestra per il massimo comfort. Movimento centrale BB92. Aumenta lo standard dell'assale e il tubo sterzo conico per garantire rigidità e precisione di sterzata. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF3
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Rock Shox SID Select, Air, 100mm suspension travel, Tapered, Remote lockout, 42mm fork offset
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano XT
LEVE FRENO	attached
FRENI	Shimano XT, 2 piston
GUARNITURA	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano XT
MOZZO A.	attached
MOZZO P.	attached
CERCHI	Reynolds TR 249, 110x15mm width front hub, 148x12mm width rear hub, 24mm inner width, Centerlock, Shimano 12 Speed, material: carbon
PACCO PIGNONI	Shimano XT, 10-51 teeth, 12 speed
COPERTONE A.	Continental Race King 2.2, 29x2.2", fold, RaceSport
COPERTONE P.	Continental Race King 2.2, 29x2.2", fold, RaceSport
MANOPOLE	MERIDA Team CC

ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -17° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	FSA N0.55E
CANNOTTO REGGISELLA	MERIDA Team CC, material: carbon, 30.9mm diameter, 0mm setback, S-Flex
SELLA	MERIDA Expert CC
PESO	9.83 kg
PREZZO	3.990€



BIG.NINE XT

MATT DARK GREY (GLOSSY DARK SILVER)



CF3 Telaio in carbonio focalizzato XC (circa 1,29 kg BIG.NINE - M). Tubo obliquo profilato Aero, catena e reggisella profilata a balestra per il massimo comfort. Movimento centrale BB92. Aumenta lo standard dell'assale e il tubo sterzo conico per garantire rigidità e precisione di sterzata. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF3
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Rock Shox Reba RL, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano XT
LEVE FRENO	attached
FRENI	Shimano XT, 2 piston
GUARNITURA	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano SLX, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano SLX, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT CC, 22.8mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold
COPERTONE P.	Maxxis Ikon, 29x2.2", fold

MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	FSA NO.55E
CANNOTTO REGGISELLA	MERIDA Expert CC, material: carbon, 30.9mm diameter, 0mm setback
SELLA	MERIDA Expert CC
PESO	10.51 kg
PREZZO	2.790€



BIG.NINE XT

GLOSSY SPARKLING RED (DARK RED)



CF3 Telaio in carbonio focalizzato XC (circa 1,29 kg BIG.NINE - M). Tubo obliquo profilato Aero, catena e reggisella profilata a balestra per il massimo comfort. Movimento centrale BB92. Aumenta lo standard dell'assale e il tubo sterzo conico per garantire rigidità e precisione di sterzata. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF3
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Rock Shox Reba RL, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Shimano XT M8100 Shadow+
COMANDI	Shimano XT
LEVE FRENO	attached
FRENI	Shimano XT, 2 piston
GUARNITURA	Shimano XT, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano SLX, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano SLX, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT CC, 22.8mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold
COPERTONE P.	Maxxis Ikon, 29x2.2", fold

MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	FSA NO.55E
CANNOTTO REGGISELLA	MERIDA Expert CC, material: carbon, 30.9mm diameter, 0mm setback
SELLA	MERIDA Expert CC
PESO	10.51 kg
PREZZO	2.790€



BIG.NINE 5000

SILK TITAN (BLACK)



CF3 Telaio in carbonio focalizzato XC (circa 1,29 kg BIG.NINE - M). Tubo obliquo profilato Aero, catena e reggisella profilata a balestra per il massimo comfort. Movimento centrale BB92. Aumenta lo standard dell'assale e il tubo sterzo conico per garantire rigidità e precisione di sterzata. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF3
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Rock Shox Reba RL, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Shimano SLX Shadow+
COMANDI	Shimano SLX
LEVE FRENO	attached
FRENI	Shimano MT-500, 2 piston
GUARNITURA	Shimano SLX, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT510-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA EXPERT CC, 22.8mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold
COPERTONE P.	Maxxis Ikon, 29x2.2", fold

MANOPOLE	MERIDA Expert EC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	FSA NO.55E
CANNOTTO REGGISELLA	MERIDA Expert CC, material: carbon, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	10.73 kg
PREZZO	2.390€



FLEX STAY



X-TAPER HEADTUBE



SMOOTH WELDING



INTERNAL CABLE ROUTING



SMART ENTRY



DI2 READY



C-S POST MOUNT DISC



BOOST 12-148 THROUGH AXLE



NANO MATRIX CARBON



AWS ANTI WRINKLE SYSTEM



REMOTE LOCKOUT



BOOST 15-110 THROUGH AXLE

BIG.NINE 3000

MATT ANTHRACITE (RED)



CF3 Telaio in carbonio focalizzato XC (circa 1,29 kg BIG.NINE - M). Tubo obliquo profilato Aero, catena e reggisella profilata a balestra per il massimo comfort. Movimento centrale BB92. Aumenta lo standard dell'assale e il tubo sterzo conico per garantire rigidità e precisione di sterzata. Il passaggio dei cavi "Smart Entry" evita il rumore. Include protezioni integrate per tubo obliquo e foderi posteriori per una maggiore protezione del telaio

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE CF3
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Manitou Markhor Comp, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Sram SX Eagle
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT400-B, 148x12mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, -6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	FSA NO.55E
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	11.45 kg
PREZZO	1.890€



BIG.NINE SLX-EDITION

GLOSSY GREEN (BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Manitou Markhor Comp, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Shimano SLX Shadow+
COMANDI	Shimano SLX
LEVE FRENO	attached
FRENI	Shimano MT-400, 2 piston
GUARNITURA	Shimano SLX, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT500, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold
COPERTONE P.	Maxxis Ikon, 29x2.2", fold

MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	11.86 kg
PREZZO	1.390€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



C-S POST
MOUNT
DISC



REMOTE
LOCKOUT



RACELETTE 61
ALUMINIUM



TECHNO
FORMING
SYSTEM



F-MOUNT



K-MOUNT



C-MOUNT

BIG.NINE SLX-EDITION

MATT ANTHRACITE (GLOSSY BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Manitou Markhor Comp, Air, 100mm suspension travel, Tapered, Remote lockout, 51mm fork offset
CAMBIO	Shimano SLX Shadow+
COMANDI	Shimano SLX
LEVE FRENO	attached
FRENI	Shimano MT-400, 2 piston
GUARNITURA	Shimano SLX, 32 teeth, 170 mm-S, 175 mm-M up
CATENA	Shimano SLX
MOZZO A.	Shimano MT400-B, 110x15mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano MT500, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold
COPERTONE P.	Maxxis Ikon, 29x2.2", fold

MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, flat
SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	11.86 kg
PREZZO	1.390€



BIG.NINE 500

GLOSSY BRIGHT YELLOW (BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Manitou Markhor Comp, Air, 100mm suspension travel, Tapered, Lockout, 51mm fork offset
CAMBIO	Shimano Deore / Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Shimano Deore, 34-24 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC X10
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M4455
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	12.19 kg
PREZZO	1.090€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



CS POST
MOUNT
DISC



REMOTE
LOCKOUT



RACELETTE 61
ALUMINIUM



TECHNO
FORMING
SYSTEM



F-MOUNT



K-MOUNT



C-MOUNT

BIG.NINE 500

SILK TITAN (SILVER/BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Manitou Markhor Comp, Air, 100mm suspension travel, Tapered, Lockout, 51mm fork offset
CAMBIO	Shimano Deore / Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Shimano Deore, 34-24 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC X10
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M4455
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	12.19 kg
PREZZO	1.090€



BIG.NINE 400

SILK X'MAS RED (BLACK/RED)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Suntour XCR32 RL-R, Air, 100mm suspension travel, Tapered, Remote lockout, 46mm fork offset
CAMBIO	Sram SX Eagle
COMANDI	Sram SX Eagle
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Sram X1 1000 Eagle, 32 teeth, 170 mm-S, 175 mm-M up
CERCHI	Sram SX Eagle
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
PACCO PIGNONI	Sram PG-1210 Eagle, 11-50 teeth, 12 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M4455
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	12.68 kg
PREZZO	990€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



C-S POST
MOUNT
DISC



REMOTE
LOCKOUT



RACELETTE 61
ALUMINIUM



TECHNO
FORMING
SYSTEM



F-MOUNT



K-MOUNT



C-MOUNT

BIG.NINE 300

SILK ANTHRACITE (GREEN/BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Suntour XCR LOR, Air, 100mm suspension travel, Lockout, 46mm fork offset
CAMBIO	Shimano Deore / Shimano XT Shadow
COMANDI	Shimano Deore
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	FSA Alfa Drive, 36-22 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC X10
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG50, 11-36 teeth, 10 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M2345
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	12.93 kg
PREZZO	890€



BIG.NINE 300

MATT LIGHT BLUE (GLOSSY BLUE/SILVER)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Suntour XCR LOR, Air, 100mm suspension travel, Lockout, 46mm fork offset
CAMBIO	Shimano Deore / Shimano XT Shadow
COMANDI	Shimano Deore
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	FSA Alfa Drive, 36-22 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC X10
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG50, 11-36 teeth, 10 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp CC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M2345
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	12.93 kg
PREZZO	890€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



C-S POST
MOUNT
DISC



REMOTE
LOCKOUT



RACELETTE 61
ALUMINIUM



TECHNO
FORMING
SYSTEM



F-MOUNT



K-MOUNT



C-MOUNT

BIG.NINE 200

GLOSSY ANTHRACITE (BLACK/SILVER)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAILO	BIG.NINE TFS
MISURE TELAILO	S-M-L-XL-XXL
FORCELLA	Suntour XCM HLO, Coil, 100mm suspension travel, Lockout, 46mm fork offset
CAMBIO	Shimano M2020-TS / Shimano Alivio Shadow
COMANDI	Shimano Altus
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Shimano MT101-2, 36-22 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC M99
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG200, 11-36 teeth, 9 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M2345
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	13.49 kg
PREZZO	750€



BIG.NINE 200

GLOSSY GREEN (BLACK)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con geometria più rilassata. È dotato di tecnologie di prim'ordine e di alta qualità nelle saldature, tubo sterzo conico, supporti per dischi interni, passaggio cavi interno.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE TFS
MISURE TELAI	S-M-L-XL-XXL
FORCELLA	Suntour XCM HLO, Coil, 100mm suspension travel, Lockout, 46mm fork offset
CAMBIO	Shimano M2020-TS / Shimano Alivio Shadow
COMANDI	Shimano Altus
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
GUARNITURA	Shimano MT101-2, 36-22 teeth, 170 mm-S, 175 mm-M up
CATENA	KMC M99
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA COMP CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG200, 11-36 teeth, 9 speed
COPERTONE A.	Maxxis Ikon, 29x2.2", fold

COPERTONE P.	Maxxis Ikon, 29x2.2", fold
MANOPOLE	MERIDA Comp EC
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, S-70 mm, M-80 mm, L-90 mm, XL-100 mm, XXL-110 mm
MANUBRIO	MERIDA EXPERT CC, material: aluminium, 720mm width, 10mm rise
SERIE STERZO	MERIDA M2345
CANNOTTO REGGISELLA	MERIDA Comp CC, material: aluminium, 30.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC
PESO	13.49 kg
PREZZO	750€



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



DOWN TUBE
EXIT



C-S POST
MOUNT DISC



REMOTE
LOCKOUT



RACELET 61
ALUMINIUM



TECHNO
FORMING
SYSTEM



F-MOUNT



K-MOUNT



C-MOUNT

BIG.NINE 40

MATT DARK SILVER (BLUE/BLK)



SPEED N Alluminio Speed N 6061 serie doppio spessore e tecnoformato. Redesigner nel 2019 utilizzando un nuovo set di tubi con un design più moderno. Viene fornito con supporti per disco interni, nonché supporti F, C e K.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE SPEED N
MISURE TELAIO	S-M-L-XL-XXL
FORCELLA	SR Suntour XCM HLO, Coil, 100mm suspension travel, lockout
CAMBIO	Shimano FD-M2000 / Shimano RD-M370
COMANDI	Shimano ST-EF505
LEVE FRENO	Shimano ST-EF505
FRENI	Shimano ST-EF505, BR-MT200 brake caliper
GUARNITURA	Shimano MT100, 40-30-22 teeth, 170 mm-S, 175 mm-M/XXL
CATENA	KMC M99
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA CC, 17mm inner width, material: aluminium
PACCO PIGNONI	Shimano CS-HG200, 11-32 teeth, 9 speed
COPERTONE A.	MERIDA K1080, 29x2.2", wire
COPERTONE P.	MERIDA K1080, 29x2.2", wire

MANOPOLE	MERIDA EC
ATTACCO MANUBRIO	MERIDA CC, material: aluminium, 31.8mm diameter, 6° stem angle, 70 mm-S, 80 mm-M, 90 mm-L, 100 mm-XL, 110 mm-XXL
MANUBRIO	MERIDA CC, material: aluminium, 690mm width, 15mm rise
SERIE STERZO	FSA NO.10
CANNOTTO REGGISELLA	MERIDA CC, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA Sport comfort
PESO	15.2 kg
PREZZO	590€



BIG.NINE 40

GLOSSY TEAL (BLACK/SILVER-TEAL)



SPEED N Alluminio Speed N 6061 serie doppio spessore e tecnoformato. Redesigner nel 2019 utilizzando un nuovo set di tubi con un design più moderno. Viene fornito con supporti per disco interni, nonché supporti F, C e K.

| LEISURE | TOUR | ENDURANCE | RACE |

BIG.SEVEN

FRAME SIZES XS S M L



TELAI	BIG.NINE SPEED N
MISURE TELAIO	S-M-L-XL-XXL
FORCELLA	SR Suntour XCM HLO, Coil, 100mm suspension travel, lockout
CAMBIO	Shimano FD-M2000 / Shimano RD-M370
COMANDI	Shimano ST-EF505
LEVE FRENO	Shimano ST-EF505
FRENI	Shimano ST-EF505, BR-MT200 brake caliper
GUARNITURA	Shimano MT100, 40-30-22 teeth, 170 mm-S, 175 mm-M/XXL
CATENA	KMC M99
MOZZO A.	Shimano TX505, 100x9mm width front hub, 32 spoke holes, Centerlock
MOZZO P.	Shimano TX505, 135x9mm width rear hub, 32 spoke holes, Centerlock
CERCHI	MERIDA CC, 17mm inner width, material: aluminium
PACCO PIGNONI	Shimano CS-HG200, 11-32 teeth, 9 speed
COPERTONE A.	MERIDA K1080, 29x2.2", wire
COPERTONE P.	MERIDA K1080, 29x2.2", wire

MANOPOLE	MERIDA EC
ATTACCO MANUBRIO	MERIDA CC, material: aluminium, 31.8mm diameter, 6° stem angle, 70 mm-S, 80 mm-M, 90 mm-L, 100 mm-XL, 110 mm-XXL
MANUBRIO	MERIDA CC, material: aluminium, 690mm width, 15mm rise
SERIE STERZO	FSA NO.10
CANNOTTO REGGISELLA	MERIDA CC, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA Sport comfort
PESO	15.2 kg
PREZZO	590€



FRAME INTERFACES / GEOMETRIES

BIG.NINE/SEVEN

FRAME	CF5	CF3	LITE	TFS	SPEED N	TFS	SPEED N
MAX. WHEELSIZE	29x2.25"	29x2.25"	29x2.25"	29x2.25"	29x2.25"	27.5x2.25"	27.5x2.25"
MAX. CHAINRING	1x36T	1x36T; 2x36/26	1x36T; 2x38/28	3x40/30/22; 2x38/26; 1x32	3x40/30/22; 2x38/28; 1x36	3x40/30/22; 2x38/26; 1x32	3x40/30/22; 2x38/28; 1x36
<hr/>							
HEAD TUBE							
TAPERED 1-1/8" - 1.5"	•	•	•	•	•	•	
1-1/8" - 1-1/8"					•		•
<hr/>							
HEADSET							
INTEGRATED	•						
SEMI-INTEGRATED (44-55 MM)		•	•	•	•	•	
SEMI-INTEGRATED (44-44 MM)					•		•
<hr/>							
BRAKE STANDARD							
DISC BRAKE ON CHAIN STAY	•	•	•	•	•	•	•
DISC BRAKE ON SEAT STAY							
POST MOUNT 160 MM REAR BRAKE	•	•	•	•	•	•	
RIM BRAKE V-BRAKE							
INTERNATIONAL STANDARD REAR BRAKE					•		•
<hr/>							
BB-STANDARD							
BSA (68 MM)							
BSA (73 MM)					•	•	
BB 92	•	•	•				
<hr/>							
SEATPOST DIAMETER							
27.2 MM							
30.9 MM	•	•	•	•	•	•	•
<hr/>							
REAR DROPOUT-STANDARD							
QUICK RELEASE 9X135 MM					•	•	
THRU AXLE 12X148 MM	•	•	•				
<hr/>							
CABLE ROUTING							
INTERNAL SHIFTING CABLES	•	•	•	•			
INTERNAL BRAKE CABLE	•	•	•				
INTERNAL SEAT POST CABLE	•	•	•				
<hr/>							
DI2-READY	•	•	•	•			
<hr/>							
EQUIPMENT OPTIONS							
HEBIE 40 MM					•	•	
CARRIER MOUNT FRAME					•	•	
FENDER MOUNT FRAME					•	•	
<hr/>							
FD-STANDARD							
CLAMP (DIAMETER:31,8 MM)						•	
CLAMP (DIAMETER:34,9 MM)					•	•	
E-TYPE MOUNT		•	•				
TOP PULL							
DOWN PULL					•	•	
SIDE SWING		•	•				
<hr/>							
FRAMEWEIGHT*	880g size M +/- 3%	1290g size M +/- 3%	1810g size M +/- 3%	1830g size M +/- 3%	1900g size M +/- 3%	1800g size M +/- 3%	1880g size M +/- 3%
<hr/>							
RD HANGER	DH-053	DH-053	DH-053	DH-013F	DH-013F	DH-013F	DH-013F

* Frame weight only! Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

BIG.NINE CF5

FS	S	M	L	XL	XXL
ST	380	444	483	532	584
TT	585	605	625	645	665
HT	95	100	110	125	145
HTA	70	70	70	70	70
STA	73.5	73.5	73.5	73.5	73.5
CS	433	433	433	433	433
BD	65	65	65	65	65
FO	509	509	509	509	509
S	617	622	631	645	664
R	402	421	438	454	468
WB	1080	1101	1121	1142	1163

BIG.NINE CF3

FS	S	M	L	XL	XXL
ST	380	444	483	532	584
TT	585	605	625	645	665
HT	95	100	110	125	145
HTA	70	70	70	70	70
STA	73.5	73.5	73.5	73.5	73.5
CS	433	433	433	433	433
BD	65	65	65	65	65
FO	509	509	509	509	509
S	617	622	631	645	664
R	402	421	438	454	468
WB	1080	1101	1121	1142	1163

BIG.NINE LITE

FS	S	M	L	XL	XXL
ST	382	444	483	532	584
TT	585	605	625	645	665
HT	95	100	110	125	145
HTA	70	70	70	70	70
STA	73.5	73.5	73.5	73.5	73.5
CS	433	433	433	433	433
BD	65	65	65	65	65
FO	506	506	506	506	506
S	614	619	628	642	661
R	403	422	439	455	469
WB	1080	1100	1121	1142	1163

BIG.NINE TFS

FS	S	M	L	XL	XXL
ST	370	430	470	510	560
TT	570	590	610	630	650
HT	100	115	130	145	160
HTA	70	70	70	70	70
STA	73	73	73	73	73
CS	440	440	440	440	440
BD	60	60	60	60	60
FO	506	506	506	506	506
S	614	628	642	656	670
R	382	398	414	429	445
WB	1069	1090	1110	1131	1152

BIG.NINE SPEED N

FS	S	M	L	XL	XXL
ST	370	430	470	510	560
TT	570	590	610	630	650
HT	100	115	130	145	160
HTA	70	70	70	70	70
STA	73	73	73	73	73
CS	445	445	445	445	445
BD	60	60	60	60	60
FO	506	506	506	506	506
S	614	628	642	656	670
R	382	398	414	429	445
WB	1074	1095	1115	1136	1157

BIG.SEVEN LITE


FS	XS	S	M	L
ST	342	381	444	483
TT	565	585	605	625
HT	105	110	120	135
HTA	69	69	69	69
STA	73.5	73.5	73.5	73.5
CS	423	423	423	423
BD	27	27	27	27
FO	487	487	487	487
S	565	569	579	593
R	398	416	434	449
WB	1071	1092	1112	1134

BIG.SEVEN TFS

FS	XS	S	M	L
ST	340	380	440	480
TT	550	570	590	610
HT	100	115	130	145
HTA	69	69	69	69
STA	73	73	73	73
CS	430	430	430	430
BD	30	30	30	30
FO	487	487	487	487
S	563	577	591	605
R	378	394	409	425
WB	1056	1078	1099	1120

BIG.SEVEN SPEED N

FS	XS	S	M	L
ST	340	380	440	480
TT	550	570	590	610
HT	100	115	130	145
HTA	69	69	69	69
STA	73	73	73	73
CS	435	435	435	435
BD	30	30	30	30
FO	487	487	487	487
S	563	577	591	605
R	378	394	409	425
WB	1061	1083	1104	1125

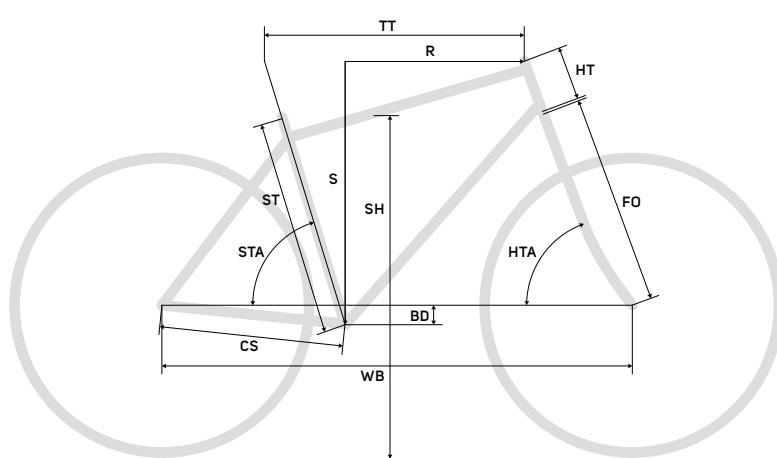

FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm]
 HTA head tube angle [°] STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm]
 FO fork length [mm] S stack [mm] R reach [mm] WB wheel base [mm]



ROAD RACE AERO · ROAD RACE · ROAD ENDURANCE
ROAD TRACK · FITNESS · GRAVEL · CYCLO CROSS

ROAD FITNESS GRAVEL

The thrill of the open road is nothing new, and there are many different bike options to get you there. Pure speed is delivered by our award and test winning aero bike, the REACTO. Lightweight, comfort and classic good looks are catered for by our SCULTURA. If comfort and versatility are high on your agenda, then the new MISSION ROAD might be the perfect machine. And if you like to keep your options open to explore away from the paved roads, then there is the extended range of our SILEX all-road bikes as well as our MISSION CX cyclo crosser.



REACTO DISC 10K-E

PEARL WHITE/GLOSSY BLACK




CF4 Telai Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco versione circa 950 g - M/L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (11/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF4 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF4 DISC, material: carbon
CAMBIO	Shimano Dura Ace Di2 / Shimano Dura Ace Di2, SS
COMANDI	Shimano Dura Ace disc Di2
LEVE FRENO	Shimano Dura Ace disc
FRENI	Shimano Dura Ace, Hydraulic disc
GUARNITURA	Shimano Dura Ace, 52-36 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Shimano CN-HG901-11
CERCHI	DT Swiss ARC 1400 Dicut DB 48, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 48mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-9100, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Prix 5000, 700x25C, fold
COPERTONE P.	Continental Grand Prix 5000, 700x25C, fold
ATTACCO MANUBRIO	Vision Metron 6D, material: carbon, -6° stem angle, 90 mm-XS, 100 mm-S, 110 mm-SM/ML, 120 mm-L/XL

MANUBRIO	Vision Metron 6D, material: carbon
SERIE STERZO	FSA REACTO CF neck
CANOTTO REGGISELLA	MERIDA Team CW, Aero shape, 15mm setback, Carbon
SELLA	Prologo NAGO C3
PESO	7.32 kg
PREZZO	9.290€



REACTO DISC 9000-E

GLOSSY BLACK/SILK BLACK




CF4 Telaio Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco circa 950 g - M / L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (1 1/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF4 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF4 DISC, material: carbon
CAMBIO	Sram Red eTAP AXS / Sram Red eTAP AXS, SS
COMANDI	Sram Red eTAP AXS HRD
LEVE FRENO	Sram ED Red eTAP AXS
FRENI	Sram ED Red eTAP AXS, Hydraulic disc
GUARNITURA	Sram Red eTAP AXS, 50-37 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Sram Red chain
CERCHI	DT Swiss ARC 1400 Dicut DB 48, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 48mm height, Centerlock, Tubeless ready
PACCO PIGNONI	CS XG 1290 D1, 10-33 teeth, 12 speed
COPERTONE A.	Continental Grand Prix 5000, 700x25C, fold
COPERTONE P.	Continental Grand Prix 5000, 700x25C, fold
ATTACCO MANUBRIO	Vision Metron 6D, material: carbon, -6° stem angle, 90 mm-XS, 100 mm-S, 110 mm-SM/ML, 120 mm-L/XL

MANUBRIO	Vision Metron 6D, material: carbon
SERIE STERZO	FSA REACTO CF neck
CANNOTTO REGGISELLA	MERIDA Team CW, Aero shape, 15mm setback, Carbon
SELLA	Prologo NAGO C3
PESO	7.3 kg
PREZZO	9.490€



REACTO DISC 8000-E

SILK FOG GREEN/BLACK



CF4 Telai Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco circa 950 g - M/L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (11/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

LEISURE

TOUR


ENDURANCE

RACE



TELAI	REACTO CF4 DISC
MISURE TELAIO	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF4 DISC, material: carbon
CAMBIO	Shimano Ultegra Di2 /Shimano Ultegra Di2, GS
COMANDI	Shimano Ultegra disc Di2
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 52-36 teeth, 170 mm-XS/S, 172.5 mm- SM/ML, 175 mm-L/XL
CATENA	KMC X11EL
CERCHI	Fulcrum Wind 550 DB 2WF, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 55mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R8000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	Vision Metron 6D, material: carbon, -6° stem angle, 90 mm-XS, 100 mm-S, 110 mm-SM/ML, 120 mm-L/XL

MANUBRIO	Vision Metron 6D, material: carbon
SERIE STERZO	FSA REACTO CF neck
CANOTTO REGGISELLA	MERIDA Team CW, Aero shape, 15mm setback, Carbon
SELLA	Prologo Scratch 2
PESO	7.49 kg
PREZZO	6.390€



REACTO DISC 8000-E

GLOSSY ANTHRACITE/SILK BLACK



CF4 Telaio Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco versione circa 950 g - M / L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (1 1/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF4 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF4 DISC, material: carbon
CAMBIO	Shimano Ultegra Di2 /Shimano Ultegra Di2, GS
COMANDI	Shimano Ultegra disc Di2
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 52-36 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11EL
CERCHI	Fulcrum Wind 550 DB 2WF, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 55mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R8000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	Vision Metron 6D, material: carbon, -6° stem angle, 90 mm-XS, 100 mm-S, 110 mm-SM/ML, 120 mm-L/XL

MANUBRIO	Vision Metron 6D, material: carbon
SERIE STERZO	FSA REACTO CF neck
CANNOTTO REGGISELLA	MERIDA Team CW, Aero shape, 15mm setback, Carbon
SELLA	Prologo Scratch 2
PESO	7.49 kg
PREZZO	6.390€



X-TAPER
HEADTUBE



INTERNAL
CABLE
ROUTING



DI2
READY



NANO
MATRIX
CARBON



AWS
ANTI WRINKLE
SYSTEM



S-FLEX



CARBON
FORK



12-142
THROUGH
AXLE



12-100
THROUGH
AXLE



NACA
FASTBACK
PROFILE



DISC
COOLER



INTERNAL
CLAMP

REACTO DISC FORCE-EDITION

GLOSSY BLACK/GILTTERY SILVER



CF2 Telai in carbonio CF2 con geometria più rilassata rispetto al CF4. Tubi con profilo "NACA Fastback" per un'aerodinamica efficiente. Tubo sterzo conico per una maggiore sicurezza di guida e movimento centrale BB386 per un efficiente trasferimento di potenza. La versione a disco ha perno passante da 12 mm con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF2 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF2 DISC, material: carbon
CAMBIO	Sram Force eTap AXS / Sram Force eTap AXS, SS
COMANDI	Sram Force eTAP AXS HRD
LEVE FRENO	Sram ED Force eTap AXS
FRENI	Sram ED Force eTap AXS, Hydraulic disc
GUARNITURA	Sram Force eTap AXS, 48-35 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Sram Force chain
CERCHI	Vision SC 55DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 55mm height, Centerlock, Tubeless ready
PACCO PIGNONI	CS XG 1270 D1, 10-33 teeth, 12 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminum, 31.8mm diameter, -8° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT CW, material: aluminium
SERIE STERZO	MERIDA REACTO neck
CANOTTO REGGISELLA	MERIDA EXPERT CW, Aero shape, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.35 kg
PREZZO	5.190€



REACTO DISC 7000-E

GLOSSY RED/BLACK



CF2 Telaio in carbonio CF2 con geometria più rilassata rispetto al CF4. Tubi con profilo "NACA Fastback" per un'aerodinamica efficiente. Tubo sterzo conico per una maggiore sicurezza di guida e movimento centrale BB386 per un efficiente trasferimento di potenza. La versione a disco ha perno passante da 12 mm con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF2 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra disc Di2 / Shimano Ultegra Di2, GS
COMANDI	Shimano Ultegra disc Di2
LEVE FRENO	Shimano Ultegra disc Di2
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 52-36 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	DT Swiss P1800 Spline DB32, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 23mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminum, 31.8mm diameter, -8° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT CW, material: aluminium
SERIE STERZO	MERIDA REACTO neck
CANNOTTO REGGISELLA	MERIDA EXPERT CW, Aero shape, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.31 kg
PREZZO	4.190€



REACTO DISC 6000

GLOSSY BLACK/ANTHRACITE



CF2 Telai in carbonio CF2 con geometria più rilassata rispetto al CF4. Tubi con profilo "NACA Fastback" per un'aerodinamica efficiente. Tubo sterzo conico per una maggiore sicurezza di guida e movimento centrale BB386 per un efficiente trasferimento di potenza. La versione a disco ha perno passante da 12 mm con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF2 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 52-36 teeth, 170 mm-XS/S, 172.5 mm- SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 700 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminum, 31.8mm diameter, -8° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT CW, material: aluminium
SERIE STERZO	MERIDA REACTO neck
CANOTTO REGGISELLA	MERIDA EXPERT CW, Aero shape, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.45 kg
PREZZO	3.190€



REACTO DISC 5000

GLOSSY OCEAN BLUE/BLACK



CF2 Telaio in carbonio CF2 con geometria più rilassata rispetto al CF4. Tubi con profilo "NACA Fastback" per un'aerodinamica efficiente. Tubo sterzo conico per una maggiore sicurezza di guida e movimento centrale BB386 per un efficiente trasferimento di potenza. La versione a disco ha perno passante da 12 mm con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF2 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano RS510, 52-36 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 900 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminum, 31.8mm diameter, -8° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT CW, material: aluminium
SERIE STERZO	MERIDA REACTO neck
CANNOTTO REGGISELLA	MERIDA EXPERT CW, Aero shape, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.85 kg
PREZZO	2.690€



REACTO DISC 5000

GLOSSY BLACK/SILK BLACK



CF2 Telaio in carbonio CF2 con geometria più rilassata rispetto al CF4. Tubi con profilo "NACA Fastback" per un'aerodinamica efficiente. Tubo sterzo conico per una maggiore sicurezza di guida e movimento centrale BB386 per un efficiente trasferimento di potenza. La versione a disco ha perno passante da 12 mm con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	REACTO CF2 DISC
MISURE TELAI	XS-S-SM-ML-L-XL
FORCELLA	MERIDA REACTO CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano RS510, 52-36 teeth, 170 mm-XS/S, 172.5 mm- SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 900 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminum, 31.8mm diameter, -8° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT CW, material: aluminium
SERIE STERZO	MERIDA REACTO neck
CANOTTO REGGISELLA	MERIDA EXPERT CW, Aero shape, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.85 kg
PREZZO	2.690€



REACTO

FRAME	CF4	CF4 DISC	CF2	CF2 DISC	LITE
MAX. WHEELSIZE	700x25C	700x25C	700x25C	700x25C	700x25C
HEAD TUBE					
TAPERED 1-1/8" - 1.5"			•	•	•
TAPERED 1-1/8" - 1-1/4"	•	•			
HEADSET					
INTEGRATED	•	•	•	•	
SEMI-INTEGRATED (44-55 MM)					•
BRAKE STANDARD					
DISC BRAKE ON CHAIN STAY		•		•	
FLAT MOUNT 140 MM W/O COOLER REAR BRAKE		•		•	
FLAT MOUNT 160 MM W COOLER REAR BRAKE		•		•	
RIMBRAKE DIREKTMOUNT	•		•		
RIMBRAKE STANDARD					•
BB-STANDARD					
BSA (68 MM)					•
BB386	•	•	•	•	
SEATPOST DIAMETER					
OTHERS	•	•	•	•	•
REAR DROPOUT-STANDARD					
QUICK RELEASE 9X100 MM	•		•		•
THRU AXLE 12X142 MM		•		•	
FRONT AXLE STANDARD					
QUICK RELEASE 9X100 MM	•		•		•
THRU AXLE 12X100 MM		•		•	
CABLE ROUTING					
INTERNAL SHIFTING CABLES	•	•	•	•	•
INTERNAL BRAKE CABLE	•	•	•	•	•
DI2-READY					
FD-STANDARD					
BRAZED ON	•	•	•	•	•
FRAMEWEIGHT*	1050g	950g	1150g	1150g	1870g
FORKWEIGHT	450g	450g	450g	450g	450g
SIZES	XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XS(47), S(50), SM(52), ML(54), L(56), XL(59)
HANDLEBAR WIDTH	XS: 380 mm S: 400 mm, SM-ML: 420 mm L-XL: 440 mm	XS: 380 mm S: 400 mm, SM-ML: 420 mm L-XL: 440 mm	XXS-XS: 380 mm S: 400 mm, SM-ML: 420 mm L-XL: 440 mm	XXS-XS: 380 mm S: 400 mm, SM-ML: 420 mm L-XL: 440 mm	XS: 380 mm S: 400 mm, SM-ML: 420 mm L-XL: 440 mm
HANDLEBAR RISE	: 6°	: 6°	: 5°	: 5°	: 5°
ONE PIECE COCKPIT	yes	yes	no	no	no
RD HANGER	E02-0013	DH-054	E02-0013	DH-054	8317-0000P BLK

* Frame weight only at size M/L (+/- 3%): Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

REACTO DISC CF4

FS	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	470	500	520	540	560	590
TT	520	535	545	560	575	590
HT	116	126	142	157	172	192
HTA	71.5	72.5	73.5	73.5	73.5	74
STA	74.5	74	74	73.5	73	73
CS	408	408	408	408	408	408
BD	70	70	66	66	66	66
FO	368	368	368	368	368	368
S	516	529	543	557	572	593
R	377	383	389	395	400	409
WB	975	978	980	990	1000	1009

REACTO CF4

FS	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	470	500	520	540	560	590
TT	520	535	545	560	575	590
HT	116	126	142	157	172	192
HTA	71.5	72.5	73.5	73.5	73.5	74
STA	74.5	74	74	73.5	73	73
CS	408	408	408	408	408	408
BD	70	70	66	66	66	66
FO	368	368	368	368	368	368
S	516	529	543	557	572	593
R	377	383	389	395	400	409
WB	975	978	980	990	1000	1009

REACTO DISC CF2


FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	515	520	535	545	560	575	590
HT	122	132	142	162	177	197	217
HTA	70	71	71	72.5	73	73	73.5
STA	74.5	74.5	74	74	73.5	73	73
CS	408	408	408	408	408	408	408
BD	70	70	70	66	66	66	66
FO	368	368	368	368	368	368	368
S	516	529	539	558	575	593	616
R	372	373	381	385	390	394	402
WB	984	981	991	990	995	1005	1014

REACTO CF2

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	515	520	535	545	560	575	590
HT	122	132	142	162	177	197	217
HTA	70	71	71	72.5	73	73	73.5
STA	74.5	74.5	74	74	73.5	73	73
CS	408	408	408	408	408	408	408
BD	70	70	70	66	66	66	66
FO	368	368	368	368	368	368	368
S	516	529	539	558	575	593	616
R	372	373	381	385	390	394	402
WB	984	981	991	990	995	1005	1014

REACTO LITE

FS	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	470	500	520	540	560	590
TT	518	530	545	560	575	590
HT	120	130	140	160	180	205
HTA	71	72	73	73	73	73
STA	74	74	74	73.5	73	73
CS	405	405	405	405	405	405
BD	61	61	61	61	61	61
FO	366	366	366	366	366	366
S	506	519	532	551	570	594
R	373	381	393	397	401	408
WB	974	978	984	994	1004	1019

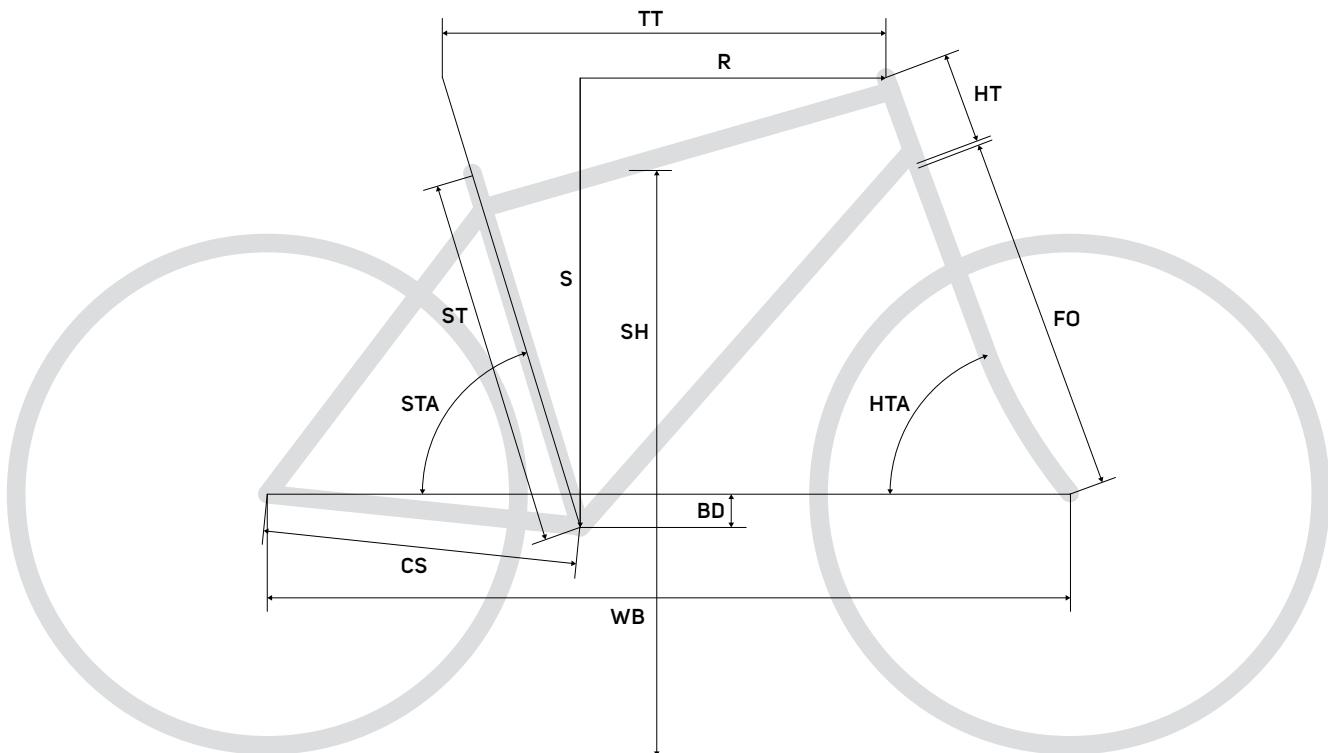

FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm] HTA head tube angle [°]
 STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm] FO fork length [mm]
 S stack [mm] R reach [mm] WB wheel base [mm]

SCULTURA DISC 10K-E

MATT BLACK/GLOSSY WHITE



CF4 Telai Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco versione circa 950 g - M/L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (11/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF4 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF4 DISC, material: carbon
CAMBIO	Shimano Dura Ace Di2 / Shimano Dura Ace Di2, SS
COMANDI	Shimano Dura Ace disc Di2
LEVE FRENO	Shimano Dura Ace disc
FRENI	Shimano Dura Ace, Hydraulic disc
GUARNITURA	Shimano Dura Ace, 52-36 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Shimano CN-HG901-11
CERCHI	DT Swiss PRC 1400 Spline DB 35, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 35mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-9100, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Prix 5000, 700x25C, fold
COPERTONE P.	Continental Grand Prix 5000, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA Team SL, material: carbon
SERIE STERZO	FSA NO.44/CF neck
CANOTTO REGGISELLA	MERIDA Team SL, 27.2mm diameter, 15mm setback, Carbon, S-Flex
SELLA	Prologo NAGO C3
PESO	6.47 kg
PREZZO	8.890€



SCULTURA DISC 9000-E

MATT BLACK/GLOSSY BLACK



CF4 Telaio Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco circa 950 g - M / L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (1 1/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF4 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF4 DISC, material: carbon
CAMBIO	Sram Red eTAP AXS / Sram Red eTAP AXS, SS
COMANDI	Sram Red eTAP AXS HRD
LEVE FRENO	Sram ED Red eTAP AXS
FRENI	Sram ED Red eTAP AXS, Hydraulic disc
GUARNITURA	Sram Red eTAP AXS, 50-37 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Sram Red chain
CERCHI	DT Swiss PRC 1400 Spline DB 35, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 35mm height, Centerlock, Tubeless ready
PACCO PIGNONI	CS XG 1290 D1, 10-33 teeth, 12 speed
COPERTONE A.	Continental Grand Prix 5000, 700x25C, fold
COPERTONE P.	Continental Grand Prix 5000, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA Team SL, material: carbon
SERIE STERZO	FSA NO.44/CF neck
CANNOTTO REGGISELLA	MERIDA Team SL, 27.2mm diameter, 15mm setback, Carbon, S-Flex
SELLA	Prologo NAGO C3
PESO	6.83 kg
PREZZO	8.990€



X-TAPER
HEADTUBE



INTERNAL
CABLE
ROUTING



DI2
READY



NANO
MATRIX
CARBON
AWS
ANTI WRINKLE
SYSTEM



S-FLEX



CARBON
FORK



12-142
THROUGH
AXLE



12-100
THROUGH
AXLE



NACA
FASTBACK
PROFILE



DISC
COOLER

SCULTURA DISC 8000-E

MATT BLACK/GLOSSY ANTHRACITE



CF4 Telai Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco versione circa 950 g - M/L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (11/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF4 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF4 DISC, material: carbon
CAMBIO	Shimano Ultegra Di2 / Shimano Ultegra Di2, GS
COMANDI	Shimano Ultegra Di2
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 52-36 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11EL
CERCHI	Fulcrum Wind 400 DB 2WF, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 40mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R8000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA Team SL, material: carbon
SERIE STERZO	FSA NO.44/CF neck
CANOTTO REGGISELLA	MERIDA Team SL, 27.2mm diameter, 15mm setback, Carbon, S-Flex
SELLA	Prologo Scratch 2
PESO	7.40 kg
PREZZO	5.890€



SCULTURA DISC LIMITED

GLOSSY BLACK/RED



CF4 Telaio Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco versione circa 950 g - M / L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (1 1/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF4 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF4 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra Disc
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT SL, 17mm inner width, 22mm height VP CLK170F, 100x12mm / VP CLK270R, 142x12mm
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	FSA NO.44/CF neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA COMP SL, incl. MERIDA minitool
PESO	7.92 kg
PREZZO	3.490€



X-TAPER
HEADTUBE



INTERNAL
CABLE
ROUTING



D2
READY



NANO
MATRIX
CARBON



AWS
ANTI
WRINKLE
SYSTEM



S-FLEX



CARBON
FORK



12-142



12-100



NACA
FASTBACK
PROFILE



DISC
COOLER

SCULTURA DISC FORCE-EDITION

GLITTERY SILVER/BLACK



CF4 Telai Superlite CF4 che utilizza fibre della massima qualità per un peso minimo (versione disco circa 950 g - M/L). Geometria professionale aggressiva con tubi profilati "NACA Fastback" e tubo sterzo conico dimagrito (11/4") per un'eccellente efficienza aerodinamica e BB386 per un eccezionale trasferimento di potenza. La versione con freni a disco ha la tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF4 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF4 DISC, material: carbon
CAMBIO	Sram Force eTap AXS / Sram Force eTap AXS, SS
COMANDI	Sram Force eTAP AXS HRD
LEVE FRENO	Sram ED Force eTap AXS
FRENI	Sram ED Force eTap AXS, Hydraulic disc
GUARNITURA	Sram Force eTap AXS, 48-35 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	Sram Force chain
CERCHI	Vision SC 40DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 40mm height, Centerlock, Tubeless ready
PACCO PIGNONI	CS XG 1270 D1, 10-33 teeth, 12 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2331 Neck
CANOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.10 kg
PREZZO	4.990€



SCULTURA DISC 6000

SILK FOG GREEN/BLACK



CF2 Telaio CF2 con geometria più morbida rispetto al CF4. Tubo obliquo profilato "NACA Fastback" e tubo sella aerodinamico. Freno a disco posteriore a montaggio piatto con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF2 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra disc
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 700 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2331 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	Prologo Nago Evo
PESO	8.33 kg
PREZZO	2.790€



SCULTURA DISC 6000

DARK SILVER/BLACK



CF2 Telaio CF2 con geometria più morbida rispetto al CF4. Tubo obliquo profilato "NACA Fastback" e tubo sella aerodinamico. Freno a disco posteriore a montaggio piatto con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF2 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra disc
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 700 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2331 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	Prologo Nago Evo
PESO	8.33 kg
PREZZO	2.790€



SCULTURA DISC 5000

SILK RACE RED/BLACK



CF2 Telaio CF2 con geometria più morbida rispetto al CF4. Tubo obliqui profilato "NACA Fastback" e tubo sella aerodinamico. Freno a disco posteriore a montaggio piatto con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | **RACE** |



TELAI	SCULTURA CF2 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF2 DISC, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra disc
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano RS510, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT SL, 17mm inner width, 22mm height VP CLK17OF, 100x12mm VP CLK27OR, 142x12mm
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Sport Race, 700x25C, fold
COPERTONE P.	Continental Grand Sport Race, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2331 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.39 kg
PREZZO	2.390€



SCULTURA DISC 4000

MATT BLACK/GREY (NEON YELLOW)



CF2 Telai CF2 con geometria più morbida rispetto al CF4. Tubo obliqui profilato "NACA Fastback" e tubo sella aerodinamico. Freno a disco posteriore a montaggio piatto con tecnologia di raffreddamento del disco.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	SCULTURA CF2 DISC
MISURE TELAI	XXS-XS-S-SM-ML-L-XL
FORCELLA	SCULTURA CF2 DISC, material: carbon
CAMBIO	Shimano 105 / Shimano 105, GS
COMANDI	Shimano 105 disc
LEVE FRENO	Shimano 105 R7000
FRENI	Shimano 105, Hydraulic disc
GUARNITURA	Shimano 105, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT SL, 17mm inner width, 22mm height VP CLK170F, 100x12mm VP CLK270R, 142x12mm
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Ultra Sport II, 700x25C, fold
COPERTONE P.	Continental Ultra Sport II, 700x25C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XXS/XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2331 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA COMP SL, incl. MERIDA minitool
PESO	8.46 kg
PREZZO	2.190€





SCULTURA

FRAME	CF4	CF4 DISC	CF2	CF2 DISC	LITE	LITE DISC	LITE DISC BSA
MAX. WHEELSIZE	700Cx25C	700Cx28C	700Cx25C	700Cx28C	700Cx25C	700Cx28C	700Cx28C
HEAD TUBE							
TAPERED 1-1/8" - 1.5"			•	•	•	•	•
TAPERED 1-1/8" - 1-1/4"	•	•					
HEADSET							
INTEGRATED	•	•					
SEMI-INTEGRATED (44-55 MM)			•	•	•	•	•
BRAKE STANDARD							
DISC BRAKE ON CHAIN STAY		•		•		•	•
FLAT MOUNT 140 MM W COOLER ONLY REAR BRAKE		•		•		•	•
RIMBRAKE STANDARD	•		•		•		
BB-STANDARD							
BB 86			•	•	•	•	
BB386	•	•					
BSA (68 MM)							•
SEATPOST DIAMETER							
27.2 MM	•	•	•	•	•	•	•
REAR DROPOUT-STANDARD							
QUICK RELEASE 9X130 MM	•		•		•		•
THRU AXLE 12X142 MM		•		•		•	
CABLE ROUTING							
INTERNAL SHIFTING CABLES	•	•	•	•	•	•	•
INTERNAL BRAKE CABLE	•	•	•	•	•	•	•
DI2-READY							
FD-STANDARD							
BRAZED ON	•	•	•	•	•	•	•
FRAMEWEIGHT*	750g	860g	1100g	1150g	1530g	1650g	1650g
FORKWEIGHT	310g	400g	420g	420g	420g	420g	420g
SIZES	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	4XS(38), 3XS(41), XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	4XS(38), 3XS(41), XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	XXS(44), XS(47), S(50), SM(52), ML(54), L(56), XL(59)	
HANDLEBAR WIDTH	XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	4XS-3XS: 360 mm, XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	4XS-3XS: 360 mm, XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	XXS-XS: 380 mm, S: 400 mm, SM-ML: 420 mm, L-XL: 440 mm	
HANDLEBAR RISE	: 6°	: 6°	: 6°	: 6°	: 6°	: 6°	: 6°
RD HANGER	E02-0013	DH-054	E02-0013	DH-054	8317-0000P BLK	DH-054	8317-0000P BLK

* Frame weight only at size M/L (+/- 3%): Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

SCULTURA DISC CF4

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	510	520	535	545	560	575	590
HT	105	115	125	140	155	170	190
HTA	71	71,5	72,5	73,5	73,5	73,5	74
STA	74,5	74,5	74	74	73,5	73	73
CS	408	408	408	408	408	408	408
BD	66	66	66	66	66	66	66
FO	370	370	370	370	370	370	370
S	500	512	524	543	557	571	592
R	371	377	383	388	394	399	408
WB	974	980	982	983	993	1003	1012

SCULTURA DISC CF4

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	510	520	535	545	560	575	590
HT	105	115	125	140	155	170	190
HTA	71	71,5	72,5	73,5	73,5	73,5	74
STA	74,5	74,5	74	74	73,5	73	73
CS	400	400	400	400	400	400	400
BD	66	66	66	66	66	66	66
FO	370	370	370	370	370	370	370
S	500	512	524	543	557	571	592
R	371	377	383	388	394	399	408
WB	963	969	971	972	982	991	1001

SCULTURA DISC CF2

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	515	520	530	545	560	575	590
HT	120	130	140	150	170	190	215
HTA	71	71	72	73	73	73	73,5
STA	75	74,5	74	74	73,5	73	73
CS	408	408	408	408	408	408	408
BD	66	66	66	66	66	66	66
FO	375	375	375	375	375	375	375
S	519	529	542	555	574	593	619
R	376	373	375	386	390	394	401
WB	982	983	979	985	998	1005	1014

SCULTURA CF2


FS	4XS(38)	3XS(41)	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	380	410	440	470	500	520	540	560	590
TT	490	500	515	520	530	545	560	575	590
HT	95	100	120	130	140	150	170	190	215
HTA	70	70,5	71	71	72	73	73	73	73,5
STA	75	75	75	74,5	74	74	73,5	73	73
CS	408	408	408	408	408	408	408	408	408
BD	66	66	66	66	66	66	66	66	66
FO	374	374	374	374	374	374	374	374	374
S	493	499	519	529	542	555	574	593	619
R	358	366	367	373	375	386	390	394	401
WB	973	979	982	983	979	985	995	1005	1014

SCULTURA DISC LITE

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	515	520	530	545	560	575	590
HT	120	130	140	150	170	190	215
HTA	71	71	72	73	73	73	73,5
STA	75	74,5	74	74	73,5	73	73
CS	408	408	408	408	408	408	408
BD	66	66	66	66	66	66	66
FO	375	375	375	375	375	375	375
S	519	529	542	555	574	593	619
R	376	373	384	386	390	394	401
WB	982	983	979	985	995	1005	1014

SCULTURA LITE

FS	XXS(44)	XS(47)	S(50)	S/M(52)	M/L(54)	L(56)	XL(59)
ST	440	470	500	520	540	560	590
TT	515	520	530	545	560	575	590
HT	120	130	140	150	170	190	215
HTA	71	71	72	73	73	73	73,5
STA	75	74,5	74	74	73,5	73	73
CS	408	408	408	408	408	408	408
BD	66	66	66	66	66	66	66
FO	375	375	375	375	375	375	375
S	519	529	542	555	574	593	619
R	376	373	384	386	390	394	401
WB	982	983	979	985	995	1005	1014

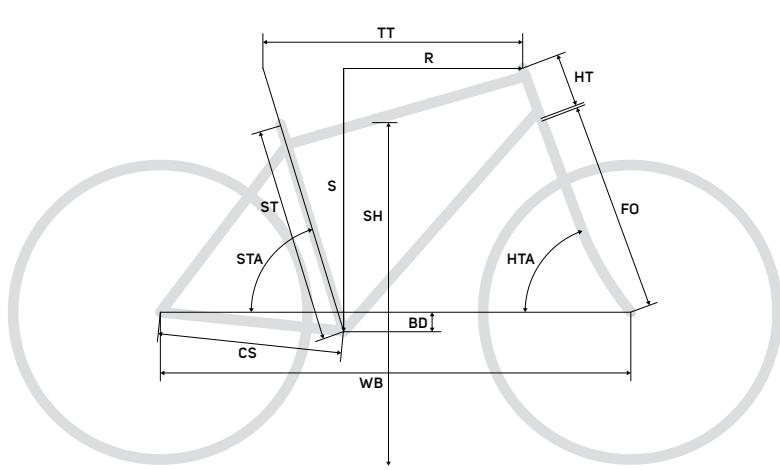

FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm]
 HTA head tube angle [°] STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm]
 FO fork length [mm] SH stack [mm] R reach [mm] WB wheel base [mm]

MISSION ROAD 7000-E

SILK FOG GREEN/BLACK



CF3 Telai in carbonio con forcellini in carbonio. "Nano Matrix" per una maggiore resistenza agli urti, tubo sterzo conico e perno passante posteriore da 142x12 mm offrono rigidità e precisione di guida. Passaggio cavi interno "Smart Entry", ponte rimovibile per parafango. La pinza posteriore a montaggio piatto è montata sul fodero posteriore, migliore per dissipare le forze frenanti, ma la mantiene protetta all'interno del carro posteriore.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	MISSION CX CF3
MISURE TELAIO	XS-S-M-L-XL
FORCELLA	MISSION CX CF3, material: carbon
CAMBIO	Shimano Ultegra Di2 / Shimano Ultegra Di2, GS
COMANDI	Shimano Ultegra disc Di2
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 50-34 teeth, 170 mm-XS/S, 172.5 mm-SS/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	DT Swiss P1850 SP 700C CL 23, 100x12mm width front hub, 142x12mm width rear hub, 18mm inner width, 23mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Continental Grand Prix 4-Season, 700x32C, fold
COPERTONE P.	Continental Grand Prix 4-Season, 700x32C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XS/S, 90 mm-M/L, 100 mm-XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	VP-B303AC Neck
CANOTTO REGGISELLA	MERIDA Team SL, 27.2mm diameter, 15mm setback, Carbon, S-Flex
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.06 kg
PREZZO	4.490€



MISSION ROAD 4000

MATT TITAN/BLACK



CF3 Telaio in carbonio con forcellini in carbonio. "Nano Matrix" per una maggiore resistenza agli urti, tubo sterzo conico e perno passante posteriore da 142x12 mm offrono rigidità e precisione di guida. Passaggio cavi interno "Smart Entry", ponte rimovibile per parafango. La pinza posteriore a montaggio piatto è montata sul foderino posteriore, migliore per dissipare le forze frenanti, ma la mantiene protetta all'interno del carro posteriore.

| LEISURE | TOUR | ENDURANCE | RACE |



TELAI	MISSION CX CF3
MISURE TELAIO	XS-S-M-L-XL
FORCELLA	MISSION CX CF3, material: carbon
CAMBIO	Shimano 105 / Shimano 105, GS
COMANDI	Shimano 105 disc
LEVE FRENO	Shimano 105 disc
FRENI	Shimano 105, Hydraulic disc
GUARNITURA	Shimano 105, 50-34 teeth, 165 mm-XXS, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT SL, 17mm inner width, 22mm height VP CLK17OF, 100x12mm VP CLK27OR, 142x12mm
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Maxxis Detonator, 700x32C, fold
COPERTONE P.	Maxxis Detonator, 700x32C, fold
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XS/S, 90 mm-M/L, 100 mm-XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	VP-B303AC Neck
CANNOTTO REGGISELLA	MERIDA Team SL, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA COMP SL, incl. MERIDA minitool
PESO	8.52 kg
PREZZO	2.590€




MISSION ROAD

FRAME	CF3	LITE
MAX. WHEELSIZE	700x35C	700x35C
HEAD TUBE		
TAPERED 1:1/8 - 1.5	•	•
HEADSET		
SEMI-INTEGRATED	•	
INTEGRATED	•	
BRAKE STANDARD		
DISC BRAKE ON CHAIN STAY	•	•
FLATMOUNT	•	•
BB-STANDARD		
BB 86	•	•
BB386		
SEATPOST DIAMETER		
27,2MM	•	•
REAR DROPOUT-STANDARD		
E-THRU AXLE 12X142	•	•
FRONT AXLE STANDARD		
12X100 MM	•	•

CF3	LITE
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
D12-READY	•
EQUIPMENT OPTIONS	
FENDER MOUNT FRAME	•
FENDER MOUNT FORK	•
FRONT LIGHT MOUNT ON CROWN	•
FD-STANDARD	
BRAZED ON	•
FRAMEWEIGHT*	885g size M +/- 3%
FORKWEIGHT	400g
SIZES	XS(44), S(47), M(50), L(53), XL(56)
HANDLEBAR WIDTH	XS: 380 mm, S: 400 mm, M: 420 L/XL: 440 mm
XS: 380 mm, S: 400 mm, M: 420 L/XL: 440 mm	XS: 380 mm, S: 400 mm, M: 420 L/XL: 440 mm

* Frame weight only! Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

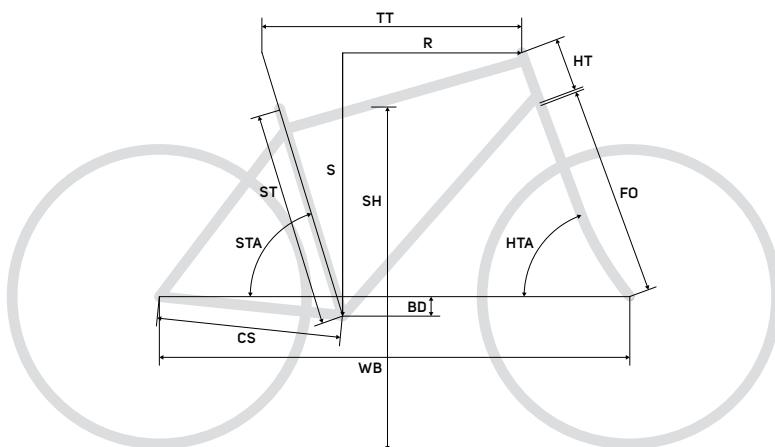


MISSION ROAD CF2

FS frame size	XS	S	M	L	XL
ST seat tube [mm]	470	500	530	560	590
TT top tube [mm]	520	535	550	565	580
HT head tube [mm]	90	109	125	144	163
HTA head tube angle [°]	70,75	71	71,75	72	72,25
STA seat tube angle [°]	74	74	74	74	74
CS chain stay length [mm]	423	423	423	423	423
BD bottom bracket drop [mm]	68	68	68	68	68
FO fork length [mm]	400	400	400	400	400
S stack [mm]	514	533	552,5	571,5	590,5
R reach [mm]	372,5	382	391,5	401	410,5
WB wheel base [mm]	999	1012,5	1016	1029	1042

MISSION ROAD LITE

XS	S	M	L	XL
470	500	530	560	590
520	535	550	565	580
90	109	125	144	163
70,75	71	71,75	72	72,25
74	74	74	74	74
427	427	427	427	427
68	68	68	68	68
400	400	400	400	400
514	533	552,5	571,5	590,5
372,5	382	391,5	401	410,5
1003	1016,5	1020	1033	1046

MISSION ROAD CARBON

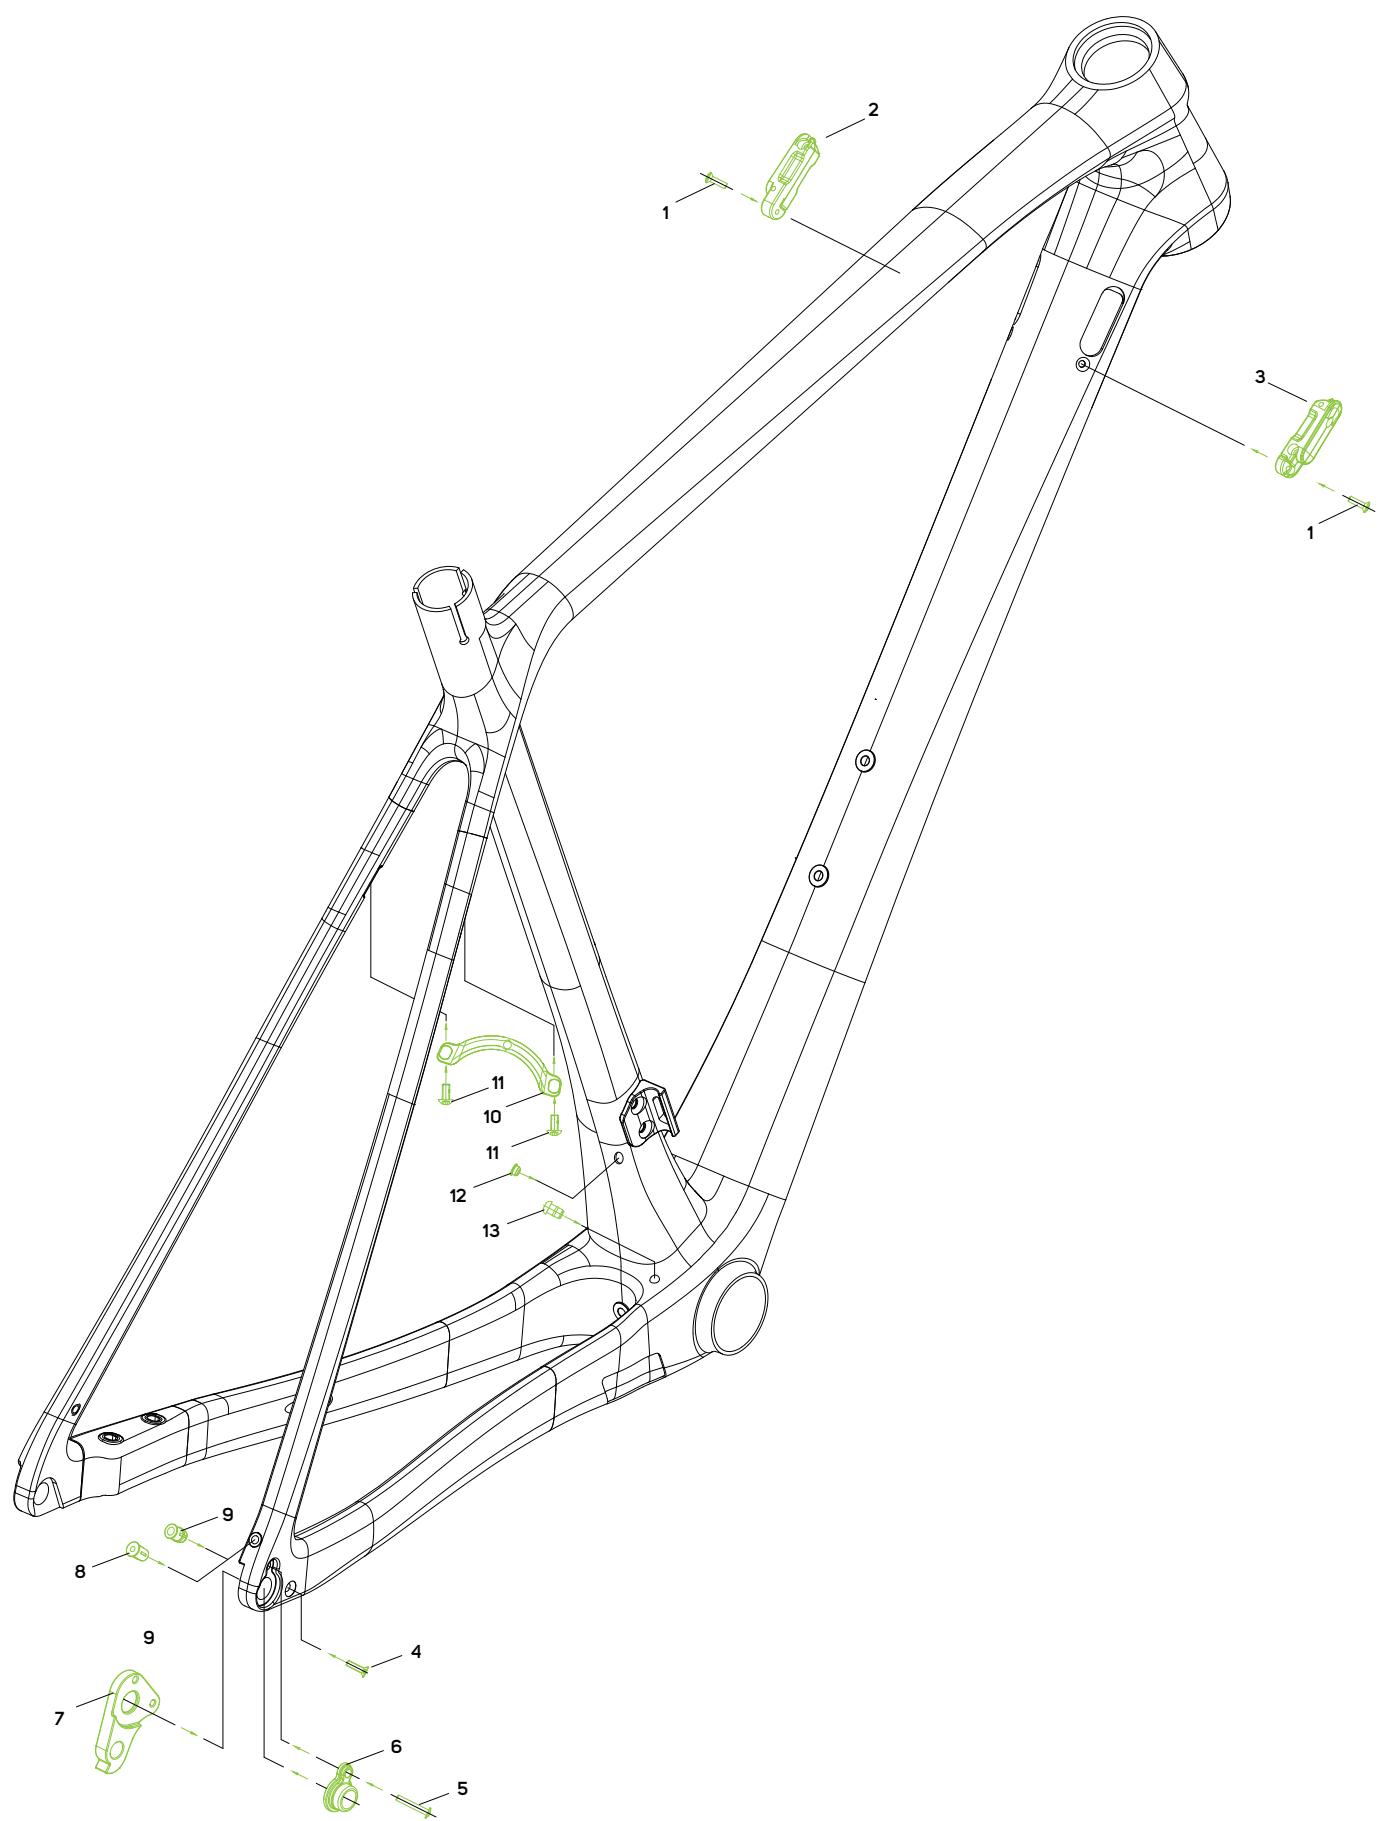

SPEEDER 200

MATT BLACK (SILVER)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con saldatura liscia e passaggio cavi interno. Completo di parafango e supporti per borse laterali

| URBAN | COMMUTING | LEISURE | FITNESS |



TELAI	SPEEDER LITE II
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SPEEDER CF2, Tapered, material: carbon
CAMBIO	Shimano Sora / Shimano Sora, SS
COMANDI	Shimano SL-R3000 / Shimano SL-R3000 - 9
LEVE FRENO	Shimano MT-200
FRENI	Shimano MT-200
GUARNITURA	FSA Tempo, 50-34 teeth, 170 mm-XS/M, 175 mm-L/XL
CATENA	KMC M99
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium Joytech D471SBT-SC-CL, 100x9mm Shimano TX505, 135x9mm
PACCO PIGNONI	Shimano CS-HG200, 11-32 teeth, 9 speed
COPERTONE A.	Maxxis Detonator, 700x32C, wire
COPERTONE P.	Maxxis Detonator, 700x32C, wire
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, 80 mm-XS, 90 mm-S, 100 mm-ML, 110 mm-L/XL

MANUBRIO	MERIDA COMP TK, material: aluminium, 600mm width, Flat
SERIE STERZO	MERIDA M2341 Neck
CANNOTTO REGGISELLA	MERIDA COMP CC, material: aluminium, 30.9mm diameter, 12mm setback
SELLA	MERIDA COMP SL, V-mount
PESO	10.68 kg
PREZZO	790€



SPEEDER 100

MATT FOG GREEN (DARK GREEN/GOLD)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con saldatura liscia e passaggio cavi interno. Completo di parafango e supporti per borse laterali

| URBAN | COMMUTING | LEISURE | FITNESS |



TELAI	SPEEDER LITE II
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SPEEDER CF2, Tapered, material: carbon
CAMBIO	Shimano TY710 / Shimano Acera-X
COMANDI	Shimano ST-EF505
LEVE FRENO	Shimano EF505
FRENI	Shimano ST-EF505, BR-MT200 brake caliper
GUARNITURA	Shimano TY301, 48-38-28 teeth, 170 mm-XS/M, 175 mm-L/XL
CATENA	KMC M700
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium Joytech D471SBT-SC-CL, 100x9mm Shimano TX505, 135x9mm
PACCO PIGNONI	Sunrace CSM668, 11-32 teeth, 8 speed
COPERTONE A.	Maxxis Detonator, 700x32C, wire
COPERTONE P.	Maxxis Detonator, 700x32C, wire
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminium, 31.8mm diameter, 6° stem angle, 80 mm-XS, 90 mm-S, 100 mm-SM/ML, 110 mm-L/XL

MANUBRIO	MERIDA COMP TK, material: aluminium, 600mm width, Flat
SERIE STERZO	MERIDA M2341 Neck
CANNOTTO REGGISELLA	MERIDA COMP CC, material: aluminium, 30.9mm diameter, 12mm setback
SELLA	MERIDA COMP SL, V-mount
PESO	10.73 kg
PREZZO	690€




FRAME INTERFACES / GEOMETRIES

SPEEDER

FRAME	LITE II
MAX. WHEELSIZE	700x37C 700x32C with fender
HEAD TUBE	
TAPERED 1-1/8" - 1.5"	•
HEADSET	
SEMI-INTEGRATED (44-55 MM)	•
BRAKE STANDARD	
DISC BRAKE ON CHAIN STAY	•
POST MOUNT 160 MM REAR BRAKE	•
BB-STANDARD	
BSA (68 MM)	•
SEATPOST DIAMETER	
30,9 MM	•
REAR DROPOUT-STANDARD	
QUICK RELEASE 9X135 MM	•
FRONT AXLE STANDARD	
QUICK RELEASE 9X100 MM	•

FRAME	LITE II
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
EQUIPMENT OPTIONS	
CARRIER MOUNT FRAME	•
CARRIER MOUNT FORK	
FENDER MOUNT FRAME	•
FENDER MOUNT FORK	•
FD-STANDARD	
CLAMP (DIAMTETER: 34,9 MM)	•
DOWN PULL	•
FRAMEWEIGHT*	1850g
FORKWEIGHT	Carbon: 500g
SIZES	XS(47), S(50), SM(52), ML(54), L(56), XL(59)
RD HANGER	8317-0000P BLK


* Frame weight only at size S/M (+/- 3%): Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

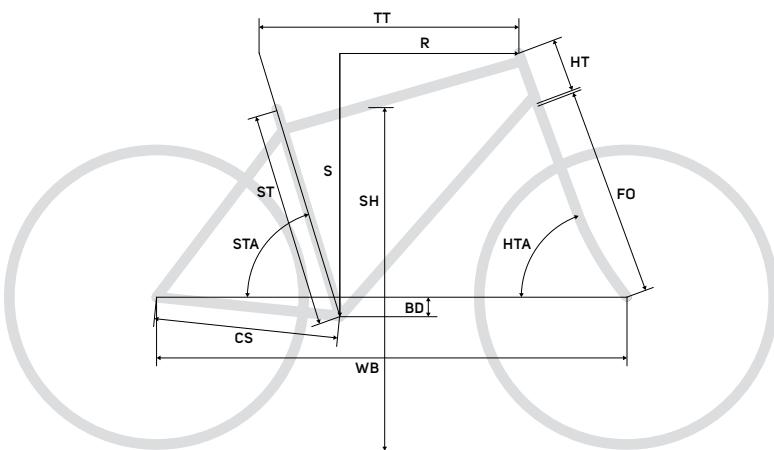

SPEEDER LITE II

FS frame size	XS	S	S/M	M/L	L	XL
ST seat tube [mm]	470	500	520	540	560	590
TT top tube [mm]	555	561	571	583	597	610
HT head tube [mm]	150	160	170	190	215	240
HTA head tube angle [°]	70	70,5	71	71,5	72	72
STA seat tube angle [°]	73,5	73,5	73,5	73,5	73,5	73,5
CS chain stay length [mm]	438	438	438	438	438	438
BD bottom bracket drop [mm]	65	65	65	65	65	65
FO fork length [mm]	395	395	395	395	395	395
S stack [mm]	561,5	573	584,5	605,5	631	655
R reach [mm]	388,5	391,5	398	404	410	416
WB wheel base [mm]	1050,5	1052,5	1057,5	1065,5	1074,5	1088
CRANK [mm]	170	170	172,5	172,5	175	175

SPEEDER LITE II

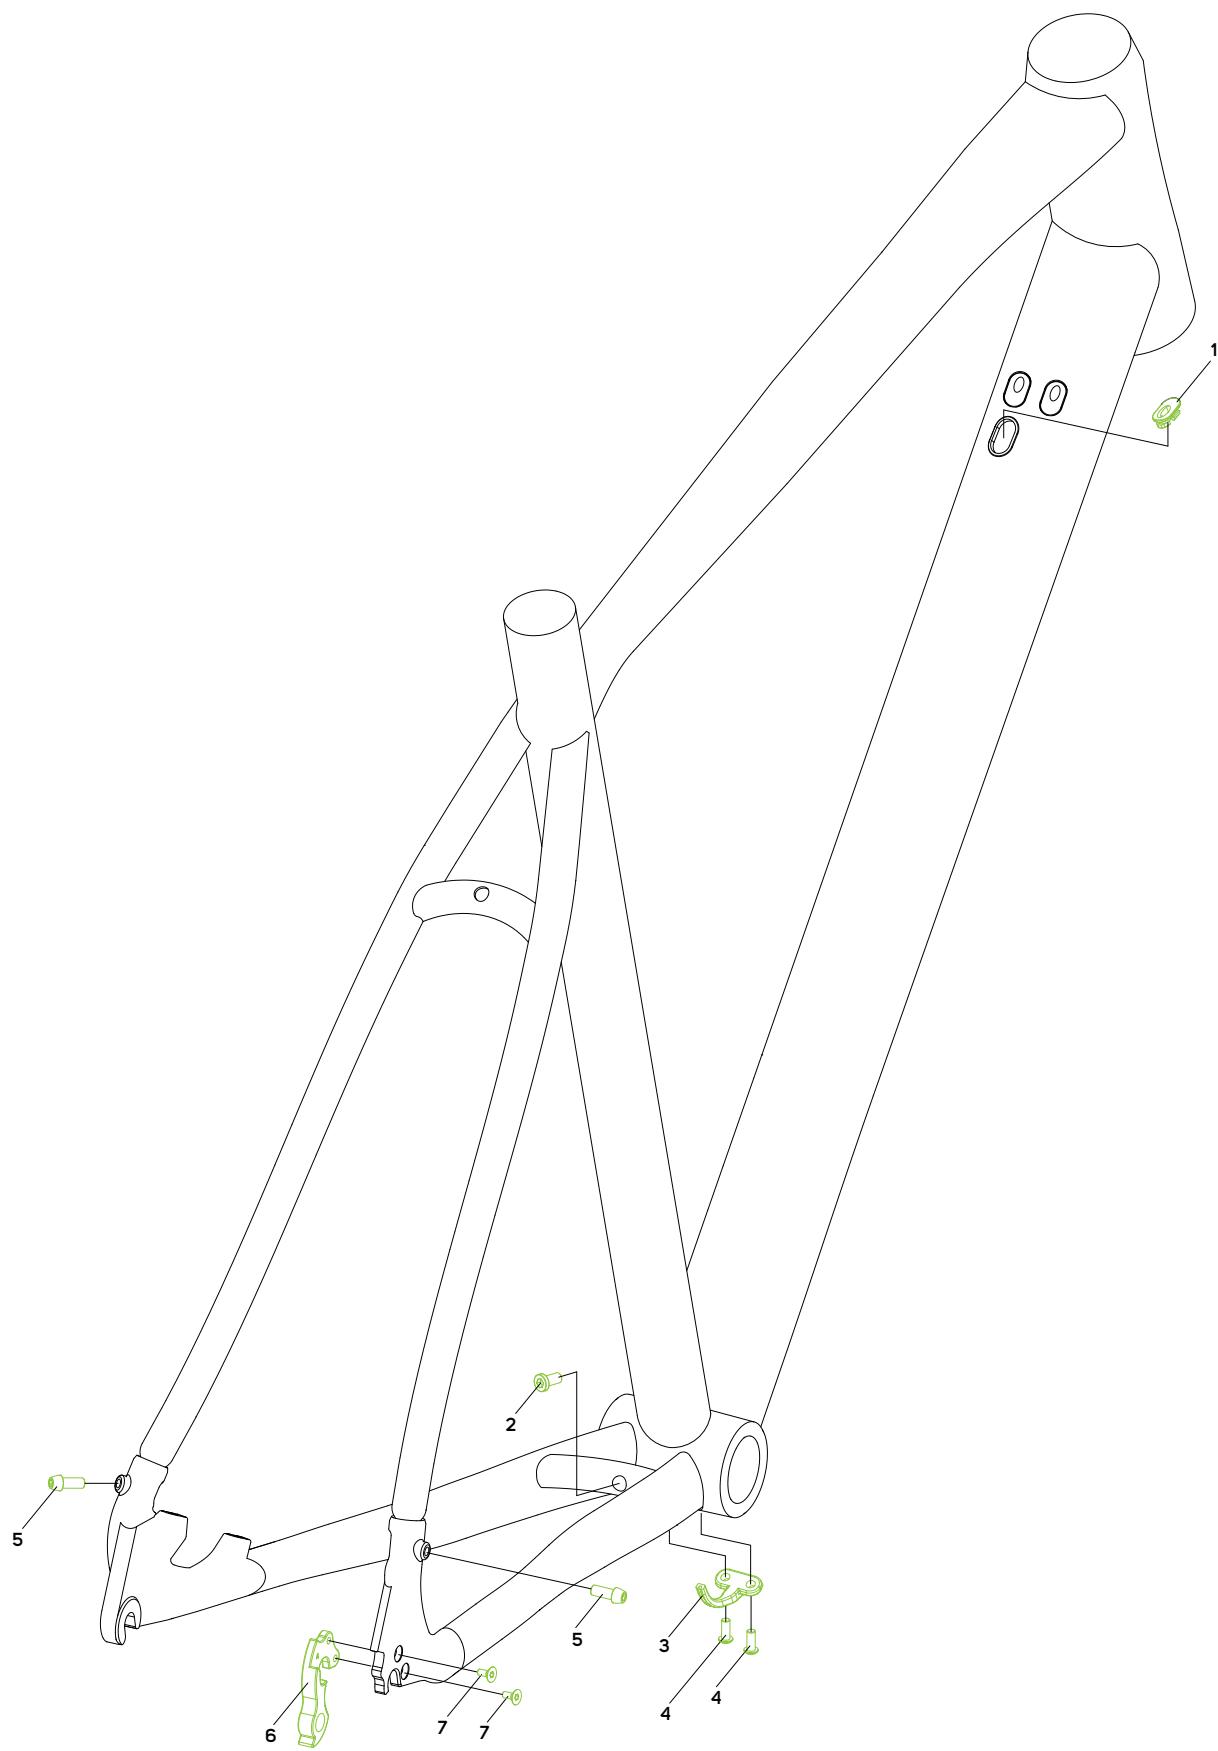

SILEX+ 8000-E

MATT ANTHRACITE (GLOSSY BLACK)



CF2 Telaio in carbonio CF2 con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Il tubo sterzo conico e il perno passante da 12 mm assicurano rigidità e precisione di sterzata. Dotato di passaggio cavi interno e movimento centrale BB386.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX CF2
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Shimano GRX817
COMANDI	Shimano GRX Di2
LEVE FRENO	Shimano GRX815
FRENI	Shimano GRX810 Di2, Hydraulic disc
GUARNITURA	Shimano GRX810, 40 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcum Rapid Red 500, 100x12mm width front hub, 142x12mm width rear hub, 23mm inner width, 24mm height, Centerlock, material: aluminium
PACCO PIGNONI	Shimano SLX, 11-42 teeth, 11 speed
COPERTONE A.	Kenda Flinridge PRO, 650Bx45C, fold, TR
COPERTONE P.	Kenda Flinridge PRO, 650Bx45C, fold, TR
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	SILEX Neck
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA EXPERT CC, V-mount, incl. MERIDA minitool
PESO	8.55 kg
PREZZO	3.990€



SILEX+ 6000

GLOSSY OCEAN BLUE (BLACK)



CF2 Telaio in carbonio CF2 con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Il tubo sterzo conico e il perno passante da 12 mm assicurano rigidità e precisione di sterzata. Dotato di passaggio cavi interno e movimento centrale BB386.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX CF2
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Sram Force1
COMANDI	Sram Force1 HRD
LEVE FRENO	Sram Force1
FRENI	Sram Force1 HRD, Hydraulic Disc
GUARNITURA	Sram Force1, 38 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT CX, 19mm inner width, 24mm height, material: aluminium VP 173SB, 100x12mm VP 273SB, 142x12mm
PACCO PIGNONI	Sram PG-1130, 11-42 teeth, 11 speed
COPERTONE A.	Kenda Flinridge PRO, 650Bx45C, fold, TR
COPERTONE P.	Kenda Flinridge PRO, 650Bx45C, fold, TR
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	SILEX Neck
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA EXPERT CC, V-mount, incl. MERIDA minitool
PESO	9.06 kg
PREZZO	2.990€



X-TAPER
HEADTUBE



INTERNAL
CABLE
ROUTING



SMART
ENTRY



NANO
MATRIX
CARBON



AWS



F-MOUNT



C-MOUNT



CARBON
FORK



12-M42
THROUGH
AXLE



12-100
THROUGH
AXLE



DISC
COOLER

SILEX 7000

MATT FOG GREEN (GLOSSY SILVER-GREEN)



CF2 CF2 carbon frame with upright gravel geometry for stable but nimble handling. Tapered head tube and 12 mm bolt through axles provide stiffness and steering precision. Featuring internal cable routing and BB386 bottom bracket.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAIO	SILEX CF2
MISURE TELAIO	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Shimano GRX810
COMANDI	Shimano GRX810
LEVE FRENO	Shimano GRX810
FRENI	Shimano GRX810 DI2, Hydraulic disc
GUARNITURA	Shimano GRX810, 48-31 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 700 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, material: aluminium
PACCO PIGNONI	Shimano CS-HG800, 11-34 teeth, 11 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31,8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	SILEX Neck
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30,9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA EXPERT CC, V-mount, incl. MERIDA minitool
PESO	8,74 kg
PREZZO	2.990€



SILEX 700

MATT BLACK (GLOSSY ANTHRACITE)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Shimano GRX810
COMANDI	Shimano GRX810
LEVE FRENO	Shimano GRX810
FRENI	Shimano GRX810 DI2, Hydraulic disc
GUARNITURA	Shimano GRX810, 48-31 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT CX, 19mm inner width, 24mm height, material: aluminium VP CLK170F, 100x12mm VP CLK270R, 142x12mm
PACCO PIGNONI	Shimano CS-HG700, 11-34 teeth, 11 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA EXPERT CC, V-mount, incl. MERIDA minitool
PESO	9.7 kg
PREZZO	2.190€



SILEX 600

GLOSSY X'MAS RED (MATT BLACK)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Sram Apex1
COMANDI	Sram Apex1 HRD
LEVE FRENO	Sram Apex1
FRENI	Sram Apex1 HRD, Hydraulic Disc
GUARNITURA	Sram Apex1, 40 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT CX, 19mm inner width, 24mm height, material: aluminium VP 173SB, 100x12mm VP 273SB, 142x12mm
PACCO PIGNONI	Sram PG-1130, 11-42 teeth, 11 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31,8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30,9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA EXPERT CC, V-mount, incl. MERIDA
PESO	10,02 kg
PREZZO	1.890€



SILEX 400

GLOSSY ANTHRACITE (MATT BLACK)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Shimano GRX400
COMANDI	Shimano GRX400
LEVE FRENO	Shimano GRX400
FRENI	Shimano GRX400, Hydraulic Disc
GUARNITURA	Shimano GRX600, 46-30 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X10
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium VP CLK170F, 100x12mm VP CLK270R, 142x12mm
PACCO PIGNONI	Shimano CS-HG50, 11-36 teeth, 10 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA COMP CC, V-mount
PESO	10.23 kg
PREZZO	1.690€



SILEX 400

MATT MEDIUM BLUE (BLUE)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Shimano GRX400
COMANDI	Shimano GRX400
LEVE FRENO	Shimano GRX400
FRENI	Shimano GRX400, Hydraulic Disc
GUARNITURA	Shimano GRX600, 46-30 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X10
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium VP CLK170F, 100x12mm VP CLK270R, 142x12mm
PACCO PIGNONI	Shimano CS-HG50, 11-36 teeth, 10 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA COMP CC, V-mount
PESO	10.23 kg
PREZZO	1.690€



SILEX 300

GLOSSY GREEN (BLACK)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Sram Apex1
COMANDI	Sram Apex1
LEVE FRENO	Sram Apex1
FRENI	Tektro Spyre, Mechanical disc
GUARNITURA	FSA Gossamer, 44 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium VP 173SB, 100x12mm VP 273SB, 142x12mm
PACCO PIGNONI	Sunrace CSMS8, 11-42 teeth, 11 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium

SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA COMP CC, V-mount
PESO	10.01 kg
PREZZO	1.390€



SILEX 300

SILK TITAN (BLACK)



LITE Telaio in alluminio leggero 6066 a triplo spessore e idroformato con geometria verticale in ghiaia per una maneggevolezza stabile ma agile. Dotato di passaggio cavi interno e movimento centrale BB86.

| COMMUTING | FITNESS | GRAVEL | OFF ROAD |



TELAI	SILEX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MERIDA SILEX CF2, Tapered, material: carbon
CAMBIO	Sram Apex1
COMANDI	Sram Apex1
LEVE FRENO	Sram Apex1
FRENI	Tektro Spyre, Mechanical disc
GUARNITURA	FSA Gossamer, 44 teeth, 170 mm-XS/S, 172,5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height, material: aluminium VP 173SB, 100x12mm VP 273SB, 142x12mm
PACCO PIGNONI	Sunrace CSMS8, 11-42 teeth, 11 speed
COPERTONE A.	Maxxis Rambler, 700x38C, fold, TR, EXO
COPERTONE P.	Maxxis Rambler, 700x38C, fold, TR, EXO
ATTACCO MANUBRIO	MERIDA EXPERT CW, material: aluminium, 31.8mm diameter, -8° stem angle, 80 mm all sizes
MANUBRIO	MERIDA EXPERT GR, material: aluminium


SERIE STERZO	MERIDA M2331
CANNOTTO REGGISELLA	MERIDA TEAM CC, material: carbon, 30.9mm diameter, 0mm setback, S-FLEX
SELLA	MERIDA COMP CC, V-mount
PESO	10.01 kg
PREZZO	1.390€



SILEX

FRAME	CF2	LITE	FRAME	CF2	LITE
MAX. WHEELSIZE ROAD PROFILE	700x42C 700x35C (with fender) 50mm for 650B	700x42C 700x35C (with fender) 42mm for 650B	CABLE ROUTING		
HEAD TUBE			INTERNAL SHIFTING CABLES	•	•
TAPERED 1-1/8" - 1.5"	•	•	INTERNAL BRAKE CABLE	•	•
HEADSET			EQUIPMENT OPTIONS		
INTEGRATED	•	•	CARRIER MOUNT FRAME	•	•
BRAKE STANDARD			CARRIER MOUNT FORK	•	•
DISC BRAKE ON CHAIN STAY	•	•	FENDER MOUNT FRAME	•	•
FLAT MOUNT 140 MM	•	•	FENDER MOUNT FORK	•	•
W/O COOLER REAR BRAKE			FRONT LIGHT MOUNT ON CROWN	•	•
FLAT MOUNT 160 MM	•	•			
WITH COOLER ONLY REAR BRAKE					
BB-STANDARD			FD-STANDARD		
BB 86		•	BRAZED ON	•	
BB386	•		CLAMP (DIAMETER: 34,9 MM)		•
SEATPOST DIAMETER			FRAMEWEIGHT*	1090g	1900g
30.9 MM	•	•	FORKWEIGHT	520g	520g
REAR DROPOUT-STANDARD			SIZES	XS(44), S(47), M(50), L(53), XL(56)	XS(44), S(47), M(50), L(53), XL(56)
THRU AXLE 12X142 MM	•	•	HANDLEBAR WIDTH	XS-S: 400 mm, M: 420 mm, L-XL: 440 mm	XS-S: 400 mm, M: 420 mm, L-XL: 440 mm
FRONT AXLE STANDARD			RD HANGER	DH-054	
THRU AXLE 12X100 MM	•	•			

* Frame weight only at size M (+/- 3%): Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

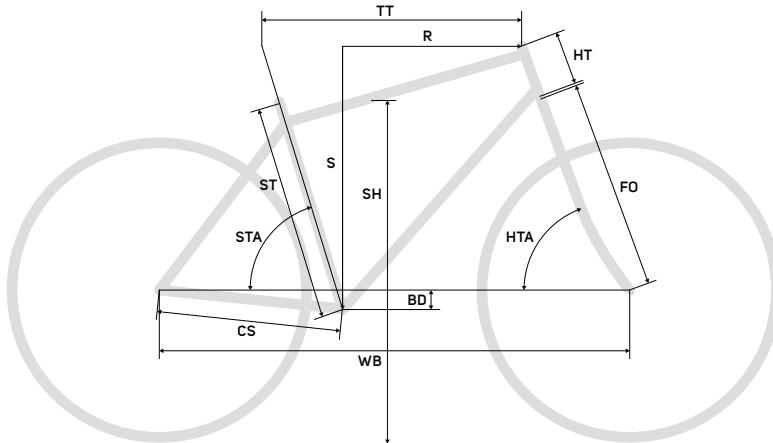

SILEX CF2

FS frame size	XS(44)	S(47)	M(50)	L(53)	XL(56)
ST seat tube [mm]	440	470	500	530	560
TT top tube [mm]	548	564	580	600	620
HT head tube [mm]	160	180	200	220	240
HTA head tube angle [°]	71	71	71	71	71
STA seat tube angle [°]	74	74	74	74	74
CS chain stay length [mm]	430	430	430	430	430
BD bottom braced drop [mm]	75	75	75	75	75
FO fork length [mm]	397	397	397	397	397
S stack [mm]	558	607	626	645	664
R reach [mm]	379	390	400	415	430
WB wheel base [mm]	1027	1044	1061	1082	1104

SILEX LITE

XS(44)	S(47)	M(50)	L(53)	XL(56)
440	470	500	530	560
548	554	579	600	620
160	180	200	220	240
71	71	71	71	71
74	74	74	74	74
430	430	430	430	430
75	75	75	75	75
397	397	397	397	397
587	606	625	644	663
380	380	400	415	430
1027	1034	1060	1082	1103

MISSION CX 7000

GLOSSY FLASHY GREEN/BLACK



CF3 Telai in carbonio con forcellini in carbonio. "Nano Matrix" per una maggiore resistenza agli urti, tubo sterzo conico e perno passante posteriore da 142x12 mm offrono rigidità e precisione di guida. Passaggio cavi interno "Smart Entry", ponte rimovibile per supporti parafango.

| COMMUTING | FITNESS | OFF ROAD | RACE |



TELAI	MISSION CX CF3
MISURE TELAIO	XS-S-M-L-XL
FORCELLA	MISSION CX CF3, material: carbon
CAMBIO	Shimano Ultegra / Shimano Ultegra RX, GS
COMANDI	Shimano Ultegra disc
LEVE FRENO	Shimano Ultegra
FRENI	Shimano Ultegra, Hydraulic disc
GUARNITURA	Shimano Ultegra, 46-36 teeth, 170 mm-XS/S, 172.5 mm-ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	Fulcrum Racing 700 DB, 100x12mm width front hub, 142x12mm width rear hub, 19mm inner width, 22mm height, Centerlock, Tubeless ready
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Maxxis All Terrane, 700x33C, fold, tubless COM-Patible
COPERTONE P.	Maxxis All Terrane, 700x33C, fold, tubless COM-Patible

ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XS/S, 90 mm-M/L, 100 mm-XL
MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	VP-B303AC Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.53 kg
PREZZO	3.090€



MISSION CX 5000

SILK SILVER/BLACK (RED)



CF3 Telaio in carbonio con forcellini in carbonio. "Nano Matrix" per una maggiore resistenza agli urti, tubo sterzo conico e perno passante posteriore da 142x12 mm offrono rigidità e precisione di guida. Passaggio cavi interno "Smart Entry", ponte rimovibile per supporti parafango.

| COMMUTING | FITNESS | OFF ROAD | RACE |



TELAI	MISSION CX CF3
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MISSION CX CF3, material: carbon
CAMBIO	Sram Apex1
COMANDI	Sram Apex 1 HRD
LEVE FRENO	Sram Apex 1 HRD
FRENI	Sram Apex1 HRD, Hydraulic Disc
GUARNITURA	Sram Apex1, 40 teeth, 170 mm-XS/S, 172.5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA EXPERT CX, 19mm inner width, 24mm height VP 173SB, 100x12mm VP 273SB, 142x12mm
PACCO PIGNONI	Sram PG-1130, 11-42 teeth, 11 speed
COPERTONE A.	Maxxis All Terrane, 700x33C, fold, tubless COMPatible
COPERTONE P.	Maxxis All Terrane, 700x33C, fold, tubless COMPatible
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XS/S, 90 mm-M/L, 100 mm-XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	VP-B303AC Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 15mm setback, Carbon
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	8.67 kg
PREZZO	2.990€



MISSION CX 400

MATT SILVER (BLUE)



LITE Telaio in alluminio 6066 a triplo spessore e idroformato con saldatura liscia, passaggio cavi interno "Smart Entry" e supporti per parafango. Sterzo preciso grazie a un tubo sterzo conico.

| COMMUTING | FITNESS | OFF ROAD | RACE |



TELAI	MISSION CX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MISSION CX CF3, material: carbon
CAMBIO	Shimano 105 / Shimano 105, GS
COMANDI	Shimano 105
LEVE FRENO	Shimano 105
FRENI	Tektro Spyre, Mechanical disc
GUARNITURA	Shimano RS510, 46-36 teeth, 170 mm-XS/S, 172.5 mm-M, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height VP 173SB, 100x12mm VP 763R-SBT, 142x12mm
PACCO PIGNONI	Shimano CS-R7000, 11-30 teeth, 11 speed
COPERTONE A.	Maxxis Mud Wrestler, 700x33C, fold, Silkworm
COPERTONE P.	Maxxis Mud Wrestler, 700x33C, fold, Silkworm
ATTACCO MANUBRIO	MERIDA EXPERT CC, material: aluminum, 31.8mm diameter, -5° stem angle, 80 mm-XS/S, 90 mm-M/L, 100 mm-XL
MANUBRIO	MERIDA EXPERT SL, material: aluminium

SERIE STERZO	MERIDA M2331 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, 27.2mm diameter, 12mm setback
SELLA	MERIDA EXPERT CC, incl. MERIDA minitool
PESO	9.87 kg
PREZZO	1.390€



MISSION CX 100 SE

GLOSSY PEARL SAND (BLACK)



LITE Telaio in alluminio 6066 a triplo spessore e idroformato con saldatura liscia, passaggio cavi interno "Smart Entry" e supporti per parafango. Sterzo preciso grazie a un tubo sterzo conico.

| COMMUTING | FITNESS | OFF ROAD | RACE |



TELAI	MISSION CX LITE
MISURE TELAI	XS-S-M-L-XL
FORCELLA	MISSION CX TFS, material: aluminium
CAMBIO	Sram Apex1
COMANDI	Sram Apex 1
LEVE FRENO	Sram Apex 1 -BL
FRENI	Promax ROAD PM, Mechanical disc
GUARNITURA	FSA Vero Pro, 40 teeth, 170 mm-XS/S, 172.5 mm-SM/ML, 175 mm-L/XL
CATENA	KMC X11
CERCHI	MERIDA COMP SL, 17mm inner width, 22mm height Joytech D471SBT-SC, 100x9mm Joytech D472T-SBT-SC, 135x9mm
PACCO PIGNONI	Sunrace CSMS8, 11-42 teeth, 11 speed
COPERTONE A.	Maxxis Mud Wrestler, 700x33C, fold, Silkworm
COPERTONE P.	Maxxis Mud Wrestler, 700x33C, fold, Silkworm
ATTACCO MANUBRIO	MERIDA COMP CC, material: aluminum, 31.8mm diameter, -6° stem angle, 90 mm-XS/S, 100 mm-SM/ML/L, 110 mm-XL

MANUBRIO	MERIDA EXPERT SL, material: aluminium
SERIE STERZO	MERIDA M2339 Neck
CANNOTTO REGGISELLA	MERIDA COMP CC, 27.2mm diameter, 12mm setback
SELLA	MERIDA COMP SL
PESO	10.25 kg
PREZZO	950€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING




F-MOUNT

MISSION CX

FRAME	CF3	LITE	TFS
MAX. WHEELSIZE	700x35C	700x35C	700x35C
HEAD TUBE			
TAPERED 1.1/8" - 1.5"	•	•	•
HEADSET			
SEMI-INTEGRATED		•	•
INTEGRATED	•		
BRAKE STANDARD			
DISC BRAKE ON CHAIN STAY	•	•	•
FLAT MOUNT 160 MM REAR BRAKE	•	•	
POST MOUNT 160 MM REAR BRAKE		•	
BB-STANDARD			
BB 86	•	•	
BSA (68 MM)		•	
SEATPOST DIAMETER			
27.2 MM	•	•	•
REAR DROPOUT-STANDARD			
THRU AXLE 12X142 MM	•	•	
QUICK RELEASE 9X130 MM		•	
FRONT AXLE STANDARD			
THRU AXLE 12X100 MM	•	•	
QUICK RELEASE 9X100 MM		•	

FRAME	CF3	LITE	TFS
CABLE ROUTING			
INTERNAL SHIFTING CABLES	•	•	•
INTERNAL BRAKE CABLE	•	•	•
D12-READY			
EQUIPMENT OPTIONS			
CARRIER MOUNT FRAME	•	•	•
FENDER MOUNT FRAME	•	•	•
FENDER MOUNT FORK	•	•	•
FRONT LIGHT MOUNT ON CROWN	•	•	•
FD-STANDARD			
BRAZED ON	•	•	•
CLAMP (DIAMETER: 34.9 MM)			•
FRAMEWEIGHT			
945g*	945g*	1620g*	1620g*
FORKWEIGHT			
420g +/- 3%	420g +/- 3%		
SIZES			XS(47), S(50), SM(52), ML(54), L(56) XL(59)
HANDLEBAR WIDTH			
XS: 380 mm, S: 400 mm M: 420 mm, L/XL: 440 mm	XS: 380 mm S: 400 mm M: 420 mm, L/XL: 440 mm	XS: 380 mm S: 400 mm SM-ML: 420 mm L-XL: 440 mm	
RD HANGER			
DH-054	DH-054	8317-0000P BLK	8317-0000P BLK

* Frame weight only at size M (+/- 3%): Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

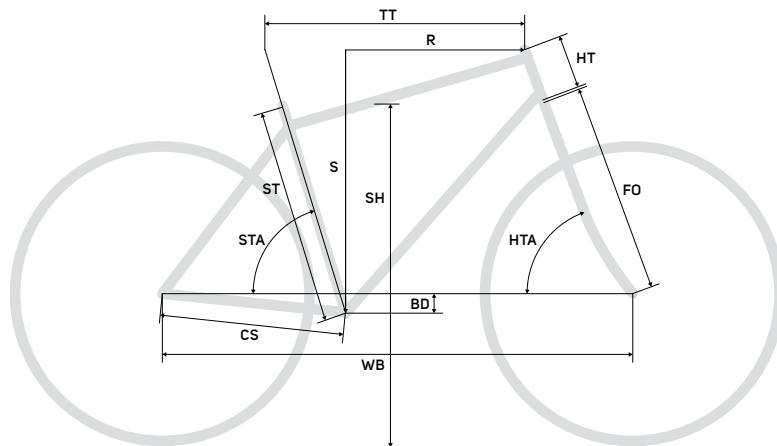

MISSION CX CF2

FS frame size	XS	S	M	L	XL
ST seat tube [mm]	470	500	530	560	590
TT top tube [mm]	520	535	550	565	580
HT head tube [mm]	90	109	125	144	163
HTA head tube angle [°]	70,75	71	71,75	72	72,25
STA seat tube angle [°]	74	74	74	74	74
CS chain stay length [mm]	423	423	423	423	423
BD bottom bracket drop [mm]	68	68	68	68	68
FO fork length [mm]	400	400	400	400	400
S stack [mm]	514	533	552,5	571,5	590,5
R reach [mm]	372,5	382	391,5	401	410,5
WB wheel base [mm]	999	1012,5	1016	1029	1042

MISSION CX LITE


XS	S	M	L	XL
470	500	520	540	560
520	535	540	555	570
90	109	125	144	163
70,75	71	71,75	72	72,25
74	74	74	74	74
427	427	427	427	427
68	68	68	68	68
400	400	400	400	400
514	533	552,5	571,5	590,5
372,5	382	391,5	401	410,5
1003	1016,5	1020	1033	1046

MISSION CX TFS


XS	S	S/M	M/L	L	XL
470	500	520	540	560	590
510	525	540	555	570	590
110	130	145	160	175	195
70	70,5	71	72	72	72
75	75	74	74	73	73
425	425	425	425	425	425
65	65	65	65	65	65
395	395	395	395	395	395
524	545	561	579	593	612
370	379	379	389	389	403
1005	1017	1018	1023	1028	1048



MISSION CX CARBON

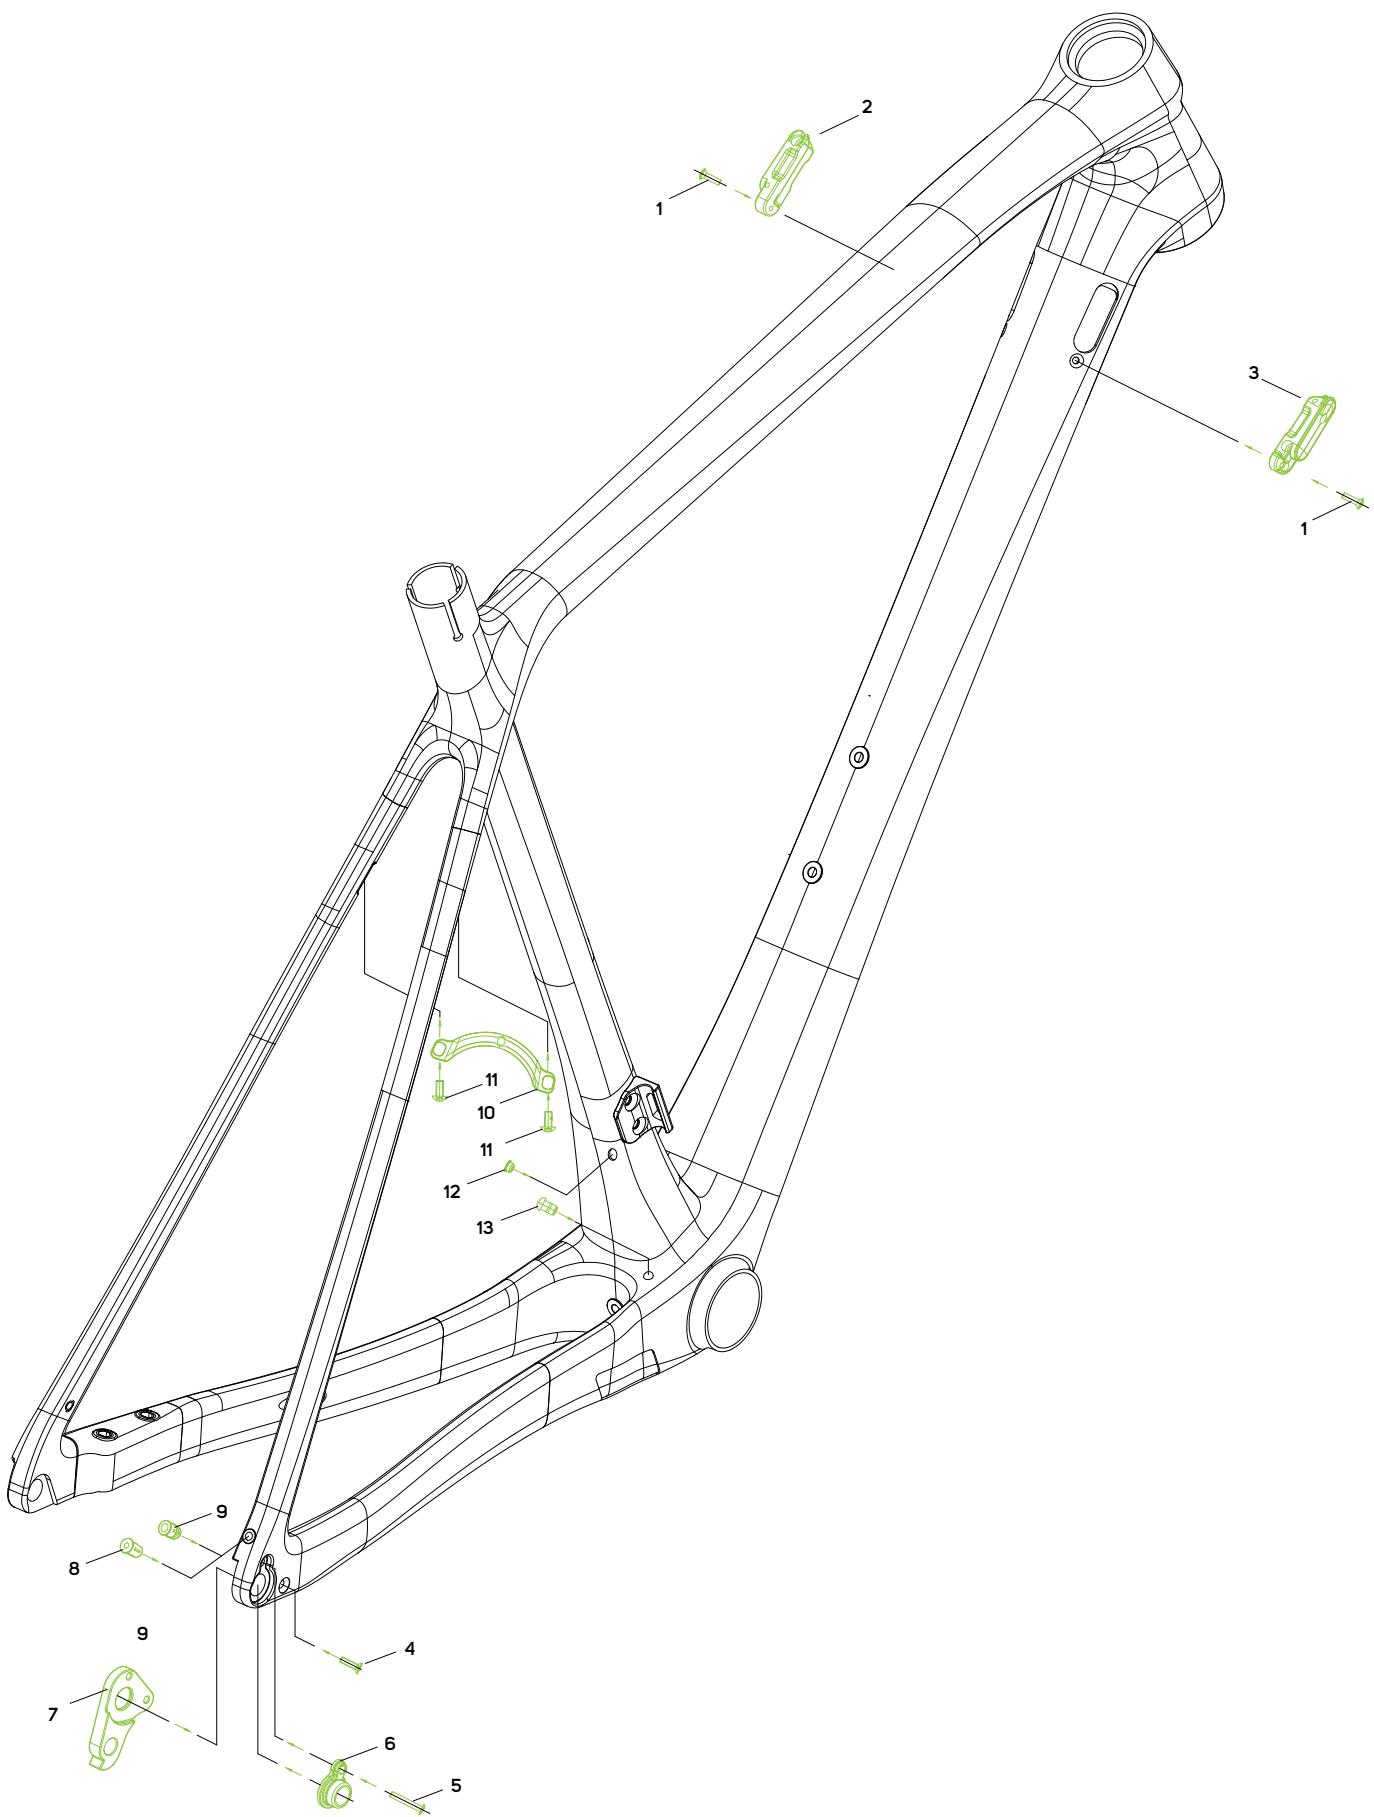

MISSION CX ALUMINIUM

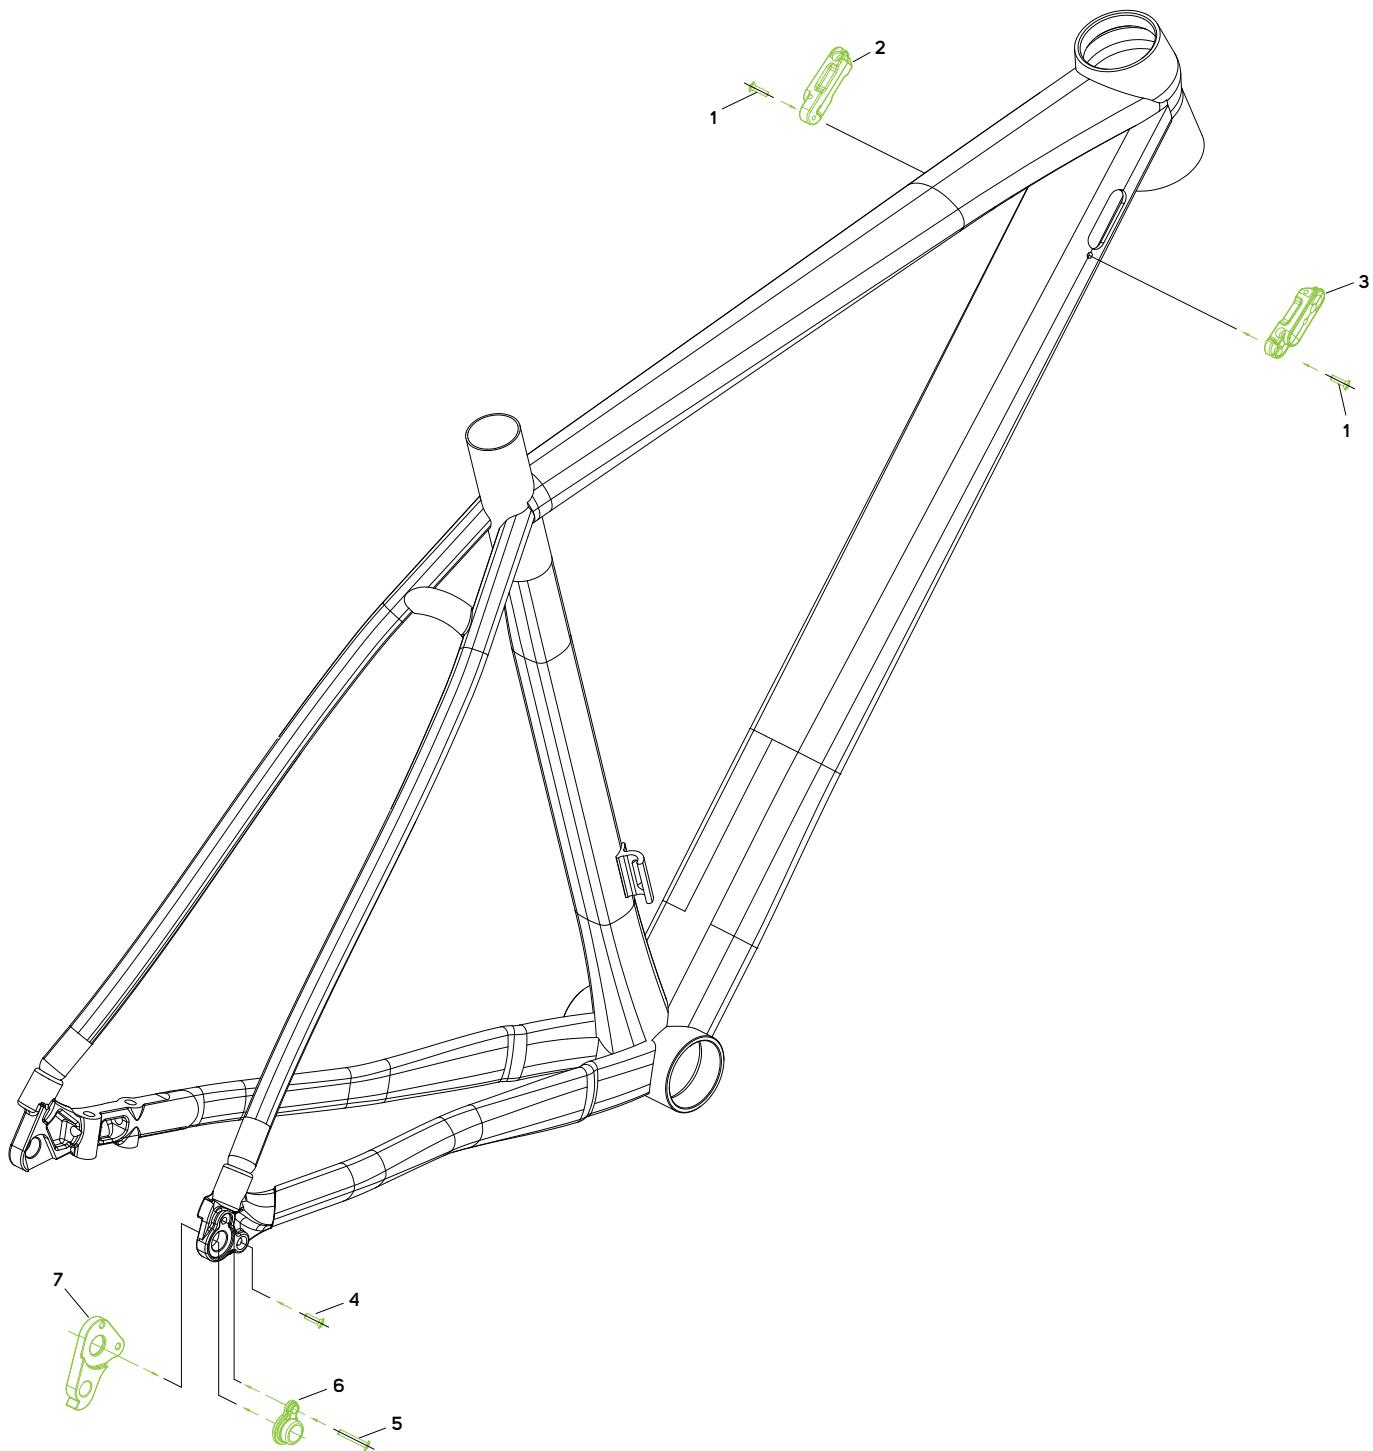

TREKKING CITY

As a reliable companion for commuting, a trip to the shops, a leisurely ride at the weekend or fitness training, our super versatile CROSSWAY and CROSSWAY URBAN range may prove the perfect partner for you. Built around durable yet lightweight aluminium frames and standing on fast rolling 700c wheels, these all-purpose bikes come in a variety of specifications and can be easily adapted to your day to day needs.



CROSSWAY 100 / -L

METALLIC BLACK (GREY)



TFS Telaio in alluminio 6061 a doppio spessore e tecnoformato con un canale per cavi nascosto sotto. Tubo sterzo conico per una maggiore sicurezza. Linee aggraziate con saldatura regolare. Dotato di supporti per portapacchi, parafanghi e cavalletto.

| URBAN | COMMUTING | LEISURE | FITNESS |



TELAI	CROSSWAY TFS
MISURE TELAI	man:XXS-XS-S-M-L-XL / lady:XXS-XS-S-M-L
FORCELLA	Suntour NEX HLO, Coil, 63mm suspension travel, Lockout
CAMBIO	Shimano M370 / Shimano Alivio
COMANDI	Shimano Altus
LEVE FRENO	Shimano MT-200
FRENI	Shimano MT-200
GUARNITURA	SR XCR, 48-36-26 teeth, 170 mm-XXS/XS/S, 175 mm-M/XL
CATENA	KMC M99
CERCHI	MERIDA COMP TK, 20mm inner width, 17mm height, material: aluminium Shimano TX505, 100x9mm Shimano TX505, 135x9mm
PACCO PIGNONI	Shimano HG200, 11-34 teeth, 9 speed
COPERTONE A.	Maxxis Overdrive Excel, 700x40C, wire, reflective stripe, Silkshield
COPERTONE P.	Maxxis Overdrive Excel, 700x40C, wire, reflective stripe, Silkshield

ATTACCO MANUBRIO	MERIDA COMP TK, material: aluminium, 31.8mm diameter, adjustable, 80 mm-XXS/XS/S, 90 mm-M/L, 100 mm-XL
MANUBRIO	MERIDA COMP CC, material: aluminium, 660mm width, 25mm rise
SERIE STERZO	MERIDA M2346 Neck
CANNOTTO REGGISELLA	MERIDA TK, 30.9mm diameter, 10mm setback, 40mm seatpost suspension travel
SELLA	MERIDA Cross Sport
PESO	14.18 kg
PREZZO	699€



CROSSWAY 40 / -L

GLOSSY TEAL (BLACK/ORANGE)



SPEED Telaio in alluminio 6061 a doppio spessore e tecnoformato. Dotato di supporti per portapacchi, parafanghi e cavalletto.

| URBAN | COMMUTING | LEISURE | FITNESS |



TELAI	CROSSWAY SPEED
MISURE TELAI	man:XS-S-SM-ML-L-XL-XXL / lady:XS-S-M-L
FORCELLA	SR Suntour NEX HLO, Coil, 63mm suspension travel, lockout
CAMBIO	Shimano FD-M370 / Shimano RD-M370
COMANDI	Shimano ST-EF505
LEVE FRENO	Shimano ST-EF505
FRENI	Shimano ST-EF505, BR-MT200 brake caliper
GUARNITURA	Shimano FC-M371, 48-36-26 teeth, 170 mm-XXS/SM, 175 mm-ML/XXL
CATENA	KMC M99
CERCHI	MERIDA CC, 17mm inner width, material: aluminium Shimano TX505, 100x9mm Shimano TX505, 135x9mm
PACCO PIGNONI	Shimano CS-HG200, 11-32 teeth, 9 speed
COPERTONE A.	MERIDA K1171, 700x40C, wire
COPERTONE P.	MERIDA K1171, 700x40C, wire
ATTACCO MANUBRIO	MERIDA TK, material: aluminium, 25.4mm diameter, adjustable, 100 mm all sizes


MANUBRIO	MERIDA CC, material: aluminium, 660mm width, 25mm rise
SERIE STERZO	FSA TH888/NO.10
CANNOTTO REGGISELLA	MERIDA TK, 27.2mm diameter, 13mm setback, 40mm seatpost suspension travel
SELLA	MERIDA Cross Sport
PESO	14.8 kg
PREZZO	599€



CROSSWAY

FRAME	TFS	SPEED	DT
MAX. WHEELSIZE	700x50C	700x42C	700x42C
HEAD TUBE			
TAPERED 1-1/8" - 1.5"	•		
1-1/8"-1-1/8"		•	•
HEADSET			
SEMI-INTEGRATED (44-55 MM)	•		
UPPER EXTERNAL-CUP (34 MM)	•		
LOWER SEMI-INTEGRATED (44 MM)		•	•
EXTERNAL CUP (34-34 MM)			•
BRAKE STANDARD			
DISC BRAKE ON CHAIN STAY	•		
DISC BRAKE ON SEAT STAY		•	•
POST MOUNT 160 MM REAR BRAKE	•		
INTERNATIONAL STANDARD REAR BRAKE		•	•
RIMBRAKE V-BRAKE	•		•
BB-STANDARD			
BSA (73 MM)	•		
BSA (68 MM)		•	•
SEATPOST DIAMETER			
27.2 MM		•	•
30.9 MM	•		
REAR DROPOUT-STANDARD			
QUICK RELEASE 9X135 MM	•	•	•
CABLE ROUTING			
SEMIT INTEGRATED	•		
EXTERNAL		•	•
EQUIPMENT OPTIONS			
HEBIE 40 MM	•	•	
KICKSTAND (CENTER MOUNT)			•
CARRIER MOUNT FRAME	•	•	•
FENDER MOUNT FRAME	•	•	•
FENDER MOUNT FORK	•	•	•
FD-STANDARD			
CLAMP (DIAMETER: 31,8 MM)		•	•
CLAMP (DIAMETER: 34,9 MM)	•		
FRAMEWEIGHT	2000g size M +/- 3%	1850g size M/L +/- 3%	1980g size M +/- 3%
SIZES GENT			
	XXS(39), XS(43), S(47), S(47), M(51), L(55), XL(59)	XXS(41), XS(44), S(46), SM(48), ML(52), L(55), XL(58), XXL(61)	
SIZES LADY			
	XXS(39), XS(43), S(47), M(51), L(55)	XS(42), S(46), M(50), L(54), XL(57)	XS(42), S(46), M(50), L(54), XL(57)
RD HANGER	DH-013F	A-HG011	DH-10 (A-HG0009)

* Frame weight only! Without axle, frame protectors, saddle clamp, hanger, steerer cups and cable guides

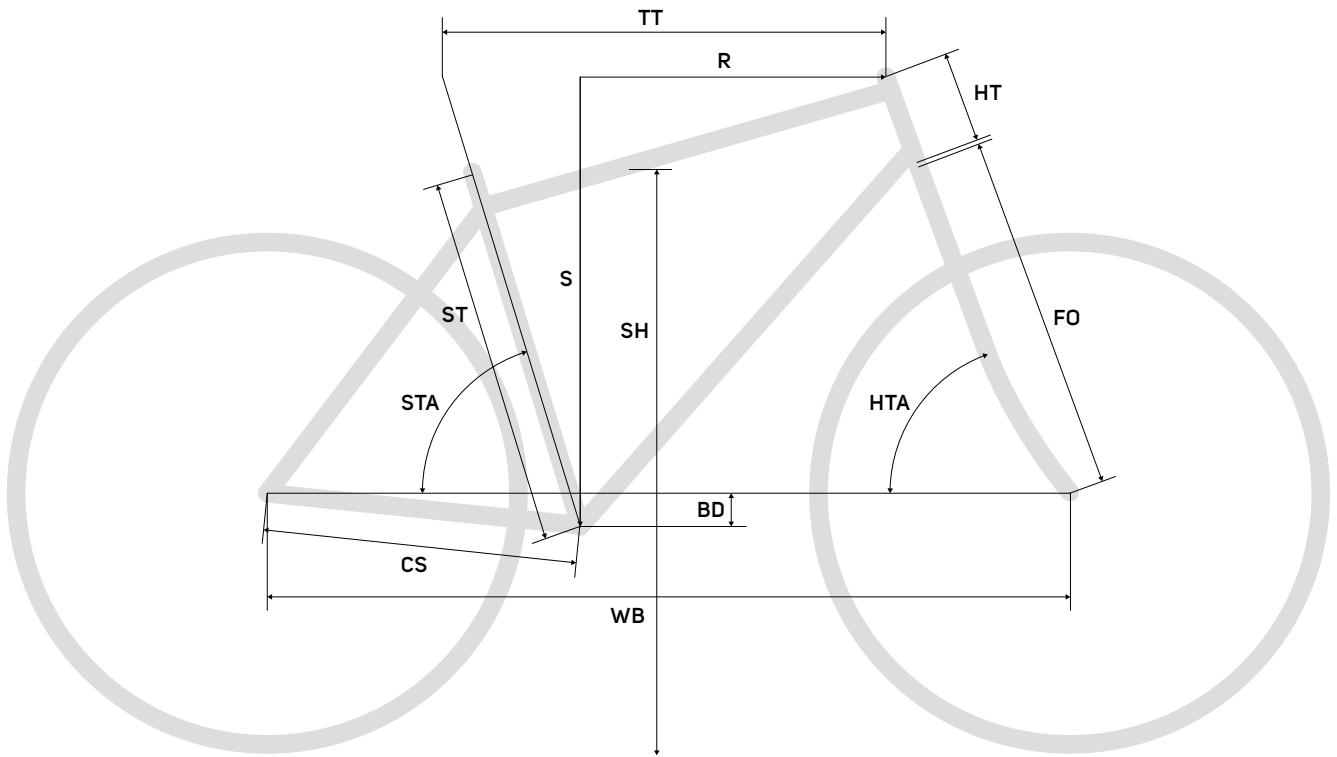

CROSSWAY TFS

FS frame size	XXS(39)	XS(44)	S(47)	M(50)	L(53)	XL(56)
ST seat tube [mm]	390	430	470	510	550	590
TT top tube [mm]	560	565	580	590	610	630
HT head tube [mm]	130	130	140	155	175	205
HTA head tube angle [°]	70.5	70.5	71	71	71.5	71.5
STA seat tube angle [°]	74	74	73.5	73.5	73	73
CS chain stay length [mm]	460	460	460	460	460	460
BD bottom bracket drop [mm]	70	70	70	70	70	70
FO fork length [mm]	460	460	460	460	460	460
S stack [mm]	611	611	622	637	658	686
R reach [mm]	385	390	396	402	409	420
WB wheel base [mm]	1080	1085	1089	1100	1109	1130

CROSSWAY TFS L

XXS(39)	XS(44)	S(47)	M(50)	L(53)
390	430	470	510	550
560	565	580	590	610
130	130	140	155	175
70.5	70.5	71	71	71.5
74	74	73.5	73.5	73
460	460	460	460	460
70	70	70	70	70
460	460	460	460	460
611	611	622	637	658
385	390	396	402	409
1080	1085	1089	1100	1109

CROSSWAY SPEED / DT

FS frame size	XXS(41)	XS(44)	S(46)	S/M(48)	M/L(52)	L(55)	XL(58)	XXL(61)
ST seat tube [mm]	410	440	460	480	520	550	580	610
TT top tube [mm]	565	565	575	585	595	605	620	635
HT head tube [mm]	125	125	125	135	135	145	170	200
HTA head tube angle [°]	71	71	71.5	71.5	72	72	72	72.5
STA seat tube angle [°]	74	74	73.5	73.5	73.5	73	73	72.5
CS chain stay length [mm]	450	450	450	450	450	450	450	450
BD bottom bracket drop [mm]	70	70	70	70	70	70	70	70
FO fork length [mm]	450	450	450	450	450	450	450	450
S stack [mm]	597	597	599	609	611	620	644	675
R reach [mm]	394	394	397	405	414	415	423	422
WB wheel base [mm]	1073	1073	1072	1082	1087	1091	1107	1110

CROSSWAY SPEED / DTL

XXS(39)	XS(44)	S(47)	M(50)	L(53)
390	430	470	510	540
565	575	585	600	615
135	140	140	170	170
71	71	71	71.5	72
74	73.5	73.5	73	73
450	450	450	450	450
70	70	70	70	70
450	450	450	450	450
607	612	612	642	644
391	394	404	404	418
1073	1078	1088	1092	1101



PERFORMANCE · SPORT · ACTIVE

E - B I K E S

Bikes are, without a doubt, a great addition to a healthy and varied lifestyle. However, imagine how different and perhaps less straining those exciting outdoor activities could be if you experienced them on an e-bike! No trip too far, no mountain too high or too steep, no load too heavy – e-bikes instantly put a smile on every rider's face, doesn't matter if you prefer your riding on or off the road. From our brand new eONE-SIXTY with internal battery technology, via the new eONE-FORTY or the also new and ultra-versatile eBIG.NINE and eBIG.TOUR all the way to our town and country loving eESPRESSO bikes – the 2020 MERIDA e-bike range is packed with new and exciting innovations and has something for every kind of riding and any kind of rider.





DESIGN MEETS INNOVATION

PERFORMANCE

TRAIL FLOW



ELEVATED



eONE-SIXTY 10K

GLOSSY CANDY TEAL/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAIO	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	FOX Factory Float X2
FORCELLA	FOX 36 Factory E-Bike+, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XTR Shadow+
COMANDI	Shimano XTR
LEVE FRENO	Shimano XTR
FRENI	Shimano XTR, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-M8050 / CRE80-12-B, 34 teeth, 165 mm all sizes, hollow
MOZZI	Attached Boost
CERCHI	DT Swiss Spline HXC 1200 spline 30 boost, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, microspine, material: carbon, Tubeless ready
PACCO PIGNONI	Shimano M9100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	Prologo PROXIM W650
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano 2xE8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.09 kg
PREZZO	8.990€



eONE-SIXTY 10K

GLOSSY BLACK/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Intradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	FOX Factory Float X2
FORCELLA	FOX 36 Factory E-Bike+, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XTR Shadow+
COMANDI	Shimano XTR
LEVE FRENO	Shimano XTR
FRENI	Shimano XTR, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-M8050 / CRE80-12-B, 34 teeth, 165 mm all sizes, hollow
MOZZI	Attached Boost
CERCHI	DT Swiss Spline HXC 1200 spline 30 boost, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, microspline, material: carbon, Tubeless ready
PACCO PIGNONI	Shimano M9100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	Prologo PROXIM W650
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano 2xE8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.09 kg
PREZZO	8.990€



eONE-SIXTY 9000

GLOSSY GREEN/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	FOX Factory Float DPX2
FORCELLA	FOX 36 Factory E-Bike+, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XT RDM8100 Shadow+
COMANDI	Shimano XT 12
LEVE FRENO	Shimano XT
FRENI	Shimano XT, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-M8050 / CRE80-12-B, 34 teeth, 165 mm all sizes, hollow
MOZZI	Attached Boost
CERCHI	DT Swiss Spline HX1501 ONE 30 boost, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, microspline, material: aluminium, Tubeless ready
PACCO PIGNONI	Shimano M8100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.2 kg
PREZZO	7.390€



eONE-SIXTY 9000

GLOSSY DARK GREY/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Intradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	FOX Factory Float DPX2
FORCELLA	FOX 36 Factory E-Bike+, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XT RDM8100 Shadow+
COMANDI	Shimano XT 12
LEVE FRENO	Shimano XT
FRENI	Shimano XT, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-M8050 / CRE80-12-B, 34 teeth, 165 mm all sizes, hollow
MOZZI	Attached Boost
CERCHI	DT Swiss Spline HX1501 ONE 30 boost, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, microspline, material: aluminium, Tubeless ready
PACCO PIGNONI	Shimano M8100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.2 kg
PREZZO	7.390€



eONE-SIXTY 8000

GLOSSY PURPLE RAINBOW/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	Rock Shox Super Deluxe Select+, platform
FORCELLA	Marzocchi Z1 E-Bike, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XT RDM8100 Shadow+
COMANDI	Shimano SL-MT800-IL
LEVE FRENO	Shimano SLX
FRENI	Shimano SLX, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-E8000 / CRE80-12-B, 34 teeth, 165 mm all sizes
MOZZI	Attached Boost
CERCHI	Fulcrum E-METAL 700, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, material: aluminium, Tubeless ready
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.32 kg
PREZZO	6.190€



eONE-SIXTY 8000

GLOSSY ANTHRACITE/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Intradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	Rock Shox Super Deluxe Select+, platform
FORCELLA	Marzocchi Z1 E-Bike, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano XT RDM8100 Shadow+
COMANDI	Shimano SL-MT800-IL
LEVE FRENO	Shimano SLX
FRENI	Shimano SLX, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-E8000 / CRE80-12-B, 34 teeth, 165 mm all sizes
MOZZI	Attached Boost
CERCHI	Fulcrum E-METAL 700, 110x15mm width front hub, 148x12mm width rear hub, 30mm inner width, Centerlock, material: aluminium, Tubeless ready
PACCO PIGNONI	Shimano M7100, 10-51 teeth, 12 speed
COPERTONI	Maxxis Assegai, 29x2.5", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT TR, 30.9mm diameter, 0 setback, XS 125mm travel seatpost - S/M 150mm travel seatpost - L/XL 170mm travel seatpost
SELLA	MERIDA Expert CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E8000, 70Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E8000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.32 kg
PREZZO	6.190€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



D2
READY



NANO
MATRIX
CARBON



AWS
ANTI WRINKLE
SYSTEM



INTERNAL
CLAMP



THERMO
GATE



ENERGY
GUARD



INTERNAL
BLOCK
SYSTEM

eONE-SIXTY 5000

GLOSSY RACE RED/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	Rock Shox Super Deluxe Select+, platform
FORCELLA	Rock Shox 35 Gold RL, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-520, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-E8000 / CRE70-B, 34 teeth, 165 mm all sizes
MOZZI	Shimano Deore, 110x15mm / Shimano Deore, 148x12mm
CERCHI	MERIDA Expert TR, 29mm inner width, material: aluminium, Tubeless ready (tubeless tape and valves not included)
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0 setback, XS/S 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E7000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.89 kg
PREZZO	5.190€



eONE-SIXTY 5000

SILK TITAN/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Intradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |




TELAI	eONE-SIXTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	Rock Shox Super Deluxe Select+, platform
FORCELLA	Rock Shox 35 Gold RL, Air, 160mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-520, 4 piston
CATENA	attached
GUARNITURA	Shimano FC-E8000 / CRE70-B, 34 teeth, 165 mm all sizes
MOZZI	Shimano Deore, 110x15mm / Shimano Deore, 148x12mm
CERCHI	MERIDA Expert TR, 29mm inner width, material: aluminium, Tubeless ready (tubeless tape and valves not included)
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Assegai, 29x2.5 ", fold, 3C EXO+ / Maxxis DHR II, 27.5x2.6 ", fold, 3C EXO+

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 40 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0 setback, XS/S 100mm travel seatpost - M/L/XL 125mm travel seatpost
SELLA	MERIDA Comp CC, V-mount, incl. MERIDA minitool
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E7000
PARAFANGHI	MERIDA mudguard front & rear
PESO	22.89 kg
PREZZO	5.190€



eONE-SIXTY

FRAME	CFA	LITE II
MAX. WHEELSIZE	27.5x2.8"	27.5x2.8"
HEAD TUBE		
TAPERED 1 1/8" - 1.5"	•	
1.5" - 1.5"	•	
HEADSET		
SEMI-INTEGRATED (44-55 MM)	•	
INTEGRATED	•	
BRAKE STANDARD		
DISC BRAKE ON CHAIN STAY	•	•
POST MOUNT 180 MM REAR BRAKE	•	•
SEATPOST DIAMETER		
30.9 MM	•	•
REAR DROPOUT-STANDARD		
THRU AXLE 12X148 MM	•	•
CABLE ROUTING		
INTERNAL SHIFTING CABLES	•	•
INTERNAL BRAKE CABLE	•	•
INTERNAL SEAT POST CABLE	•	•
DI2-READY	•	•
MOTOR INTERFACE	Shimano Type 2	Shimano Type 2
BATTERY	Shimano E8035	Shimano E8010
SPEEDSENSOR MOUNT	SM-DUE11	SM-DUE10
RD HANGER	DH-057	

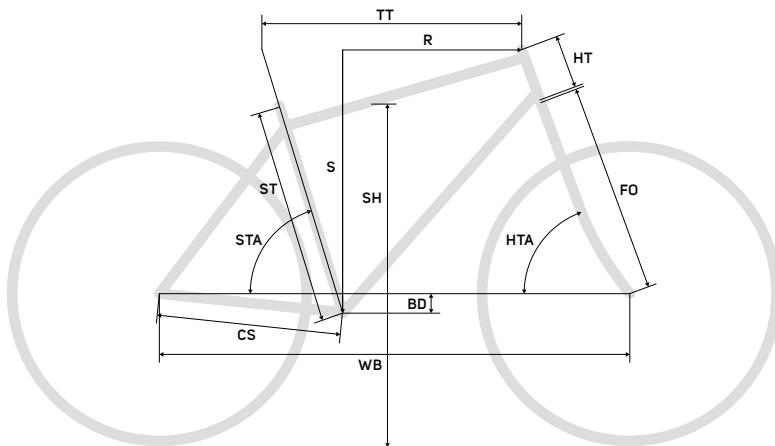


eONE-SIXTY CFA

FS frame size	XS	S	M	L	XL
ST seat tube [mm]	405	420	440	470	500
TT top tube [mm]	562,5	583,5	605	628,5	652
HT head tube [mm]	110	115	120	135	150
HTA head tube angle [°]	65,5	65,5	65,5	65,5	65,5
STA seat tube angle [°]	75,5	75,5	75,5	75,5	75,5
CS chain stay length [mm]	439,5	439,5	439,5	439,5	439,5
BD bottom bracket drop [mm]	17,5	17,5	17,5	17,5	17,5
FO fork length [mm]	571	571	571	571	571
S stack [mm]	628,5	633	637,5	651,5	665
R reach [mm]	400	420	440	460	480
WB wheel base [mm]	1168	1190	1212	1238,5	1264,5

eONE-SIXTY LITE

XS	S	M	L	XL
405	420	440	470	500
562,5	583,5	605	628,5	652
110	115	120	135	150
65,5	65,5	65,5	65,5	65,5
75,5	75,5	75,5	75,5	75,5
439,5	439,5	439,5	439,5	439,5
17,5	17,5	17,5	17,5	17,5
571	571	571	571	571
628,5	633	637,5	651,5	665
400	420	440	460	480
1168	1190	1212	1238,5	1264,5

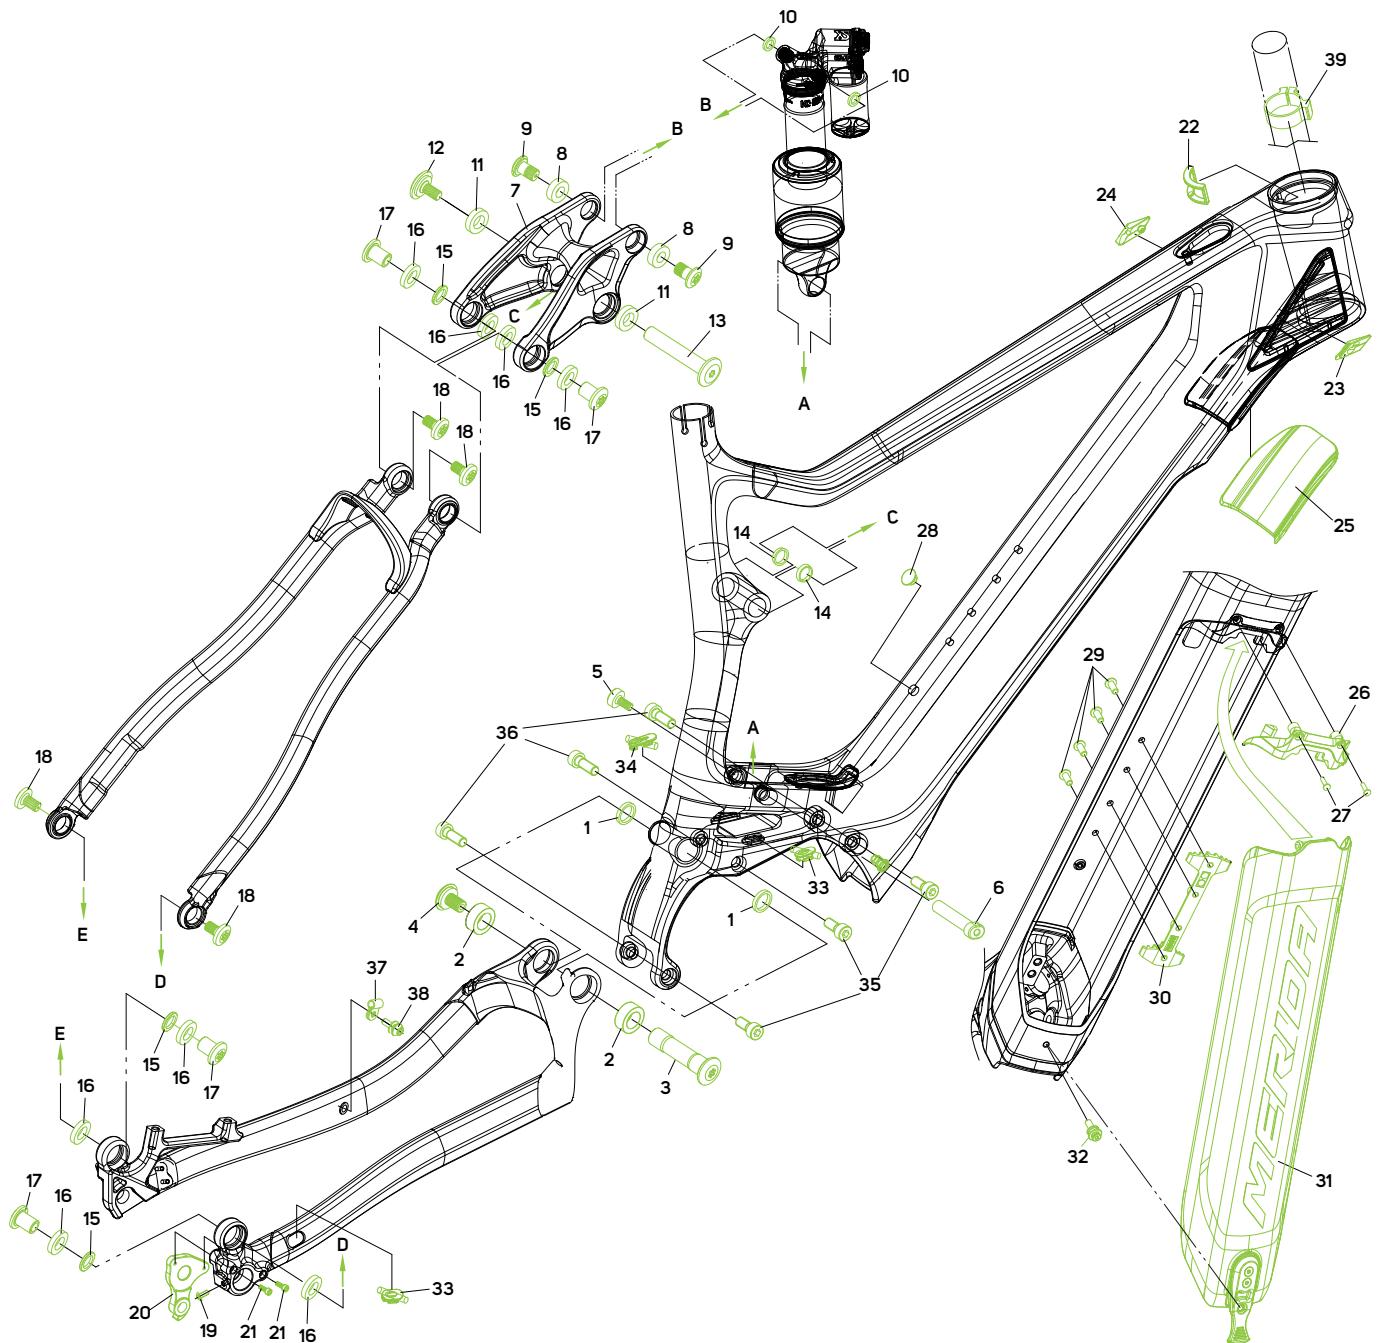

eONE-FORTY 4000

GLOSSY SPARKLING RED/MATT BLACK



Triangolo anteriore in carbonio con tecnologia a batteria integrata, accoppiato ad una robusta estremità posteriore in alluminio 6016 con geometria enduro / trail aggressiva. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore crea un aspetto integrato con il telaio.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |




TELAI	eONE-FORTY CFA
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	SUNTOUR UNAIR TR LOR8, lockout
FORCELLA	Suntour RAIDON34 LOR, Air, 140mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-400, 2 piston
CATENA	KMC e10S
GUARNITURA	Shimano FC-E8000 / CRE70-B, 34 teeth, 165 mm all sizes
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA COMP TR, 29mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis DHF, 29x2.5 ", fold, EXO TR Dual compound / Maxxis DHR II, 27.5x2.6 ", fold, EXO TR Dual compound

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 50 mm all sizes
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA COMP TR, 30.9mm diameter, 0 setback, S 100mm travel seatpost - M/L/XL/XXL 125mm travel seatpost
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	w/o display
PESO	22.43 kg
PREZZO	4.590€




eONE-FORTY

FRAME	CFA
MAX. WHEELSIZE	27.5x2.8"
HEAD TUBE	
TAPERED 1-1/8" - 1.5"	•
HEADSET	
INTEGRATED	•
BRAKE STANDARD	
DISC BRAKE ON CHAIN STAY	•
POST MOUNT 180 MM REAR BRAKE	•
SEATPOST DIAMETER	
30.9 MM	•
REAR DROPOUT-STANDARD	
THRU AXLE 12X148 MM	•
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
INTERNAL SEAT POST CABLE	•
DI2-READY	•
MOTOR INTERFACE	Shimano Type 2
BATTERY	Shimano E8035
SPEEDSENSOR MOUNT	SM-DUE11
RD HANGER	DH-057

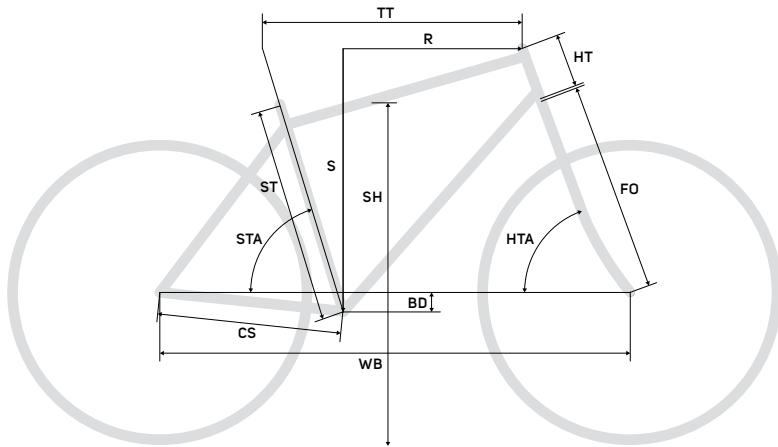

eONE-FORTY CFA

FS	S	M	L	XL	XXL
ST seat tube [mm]	405	420	440	470	500
TT top tube [mm]	560,5	581,5	602,5	626	649,5
HT head tube [mm]	110	115	120	135	150
HTA head tube angle [°]	66,5	66,5	66,5	66,5	66,5
STA seat tube angle [°]	76,5	76,5	76,5	76,5	76,5
CS chain stay length [mm]	439,5	439,5	439,5	439,5	439,5
BD bottom bracket drop [mm]	24	24	24	24	24
FO fork length [mm]	551	551	551	551	551
S stack [mm]	622	626,5	631	644,5	658
R reach [mm]	410	429,5	449,5	469,5	489,5
WB wheel base [mm]	1160	1182	1204	1230,5	1256,5

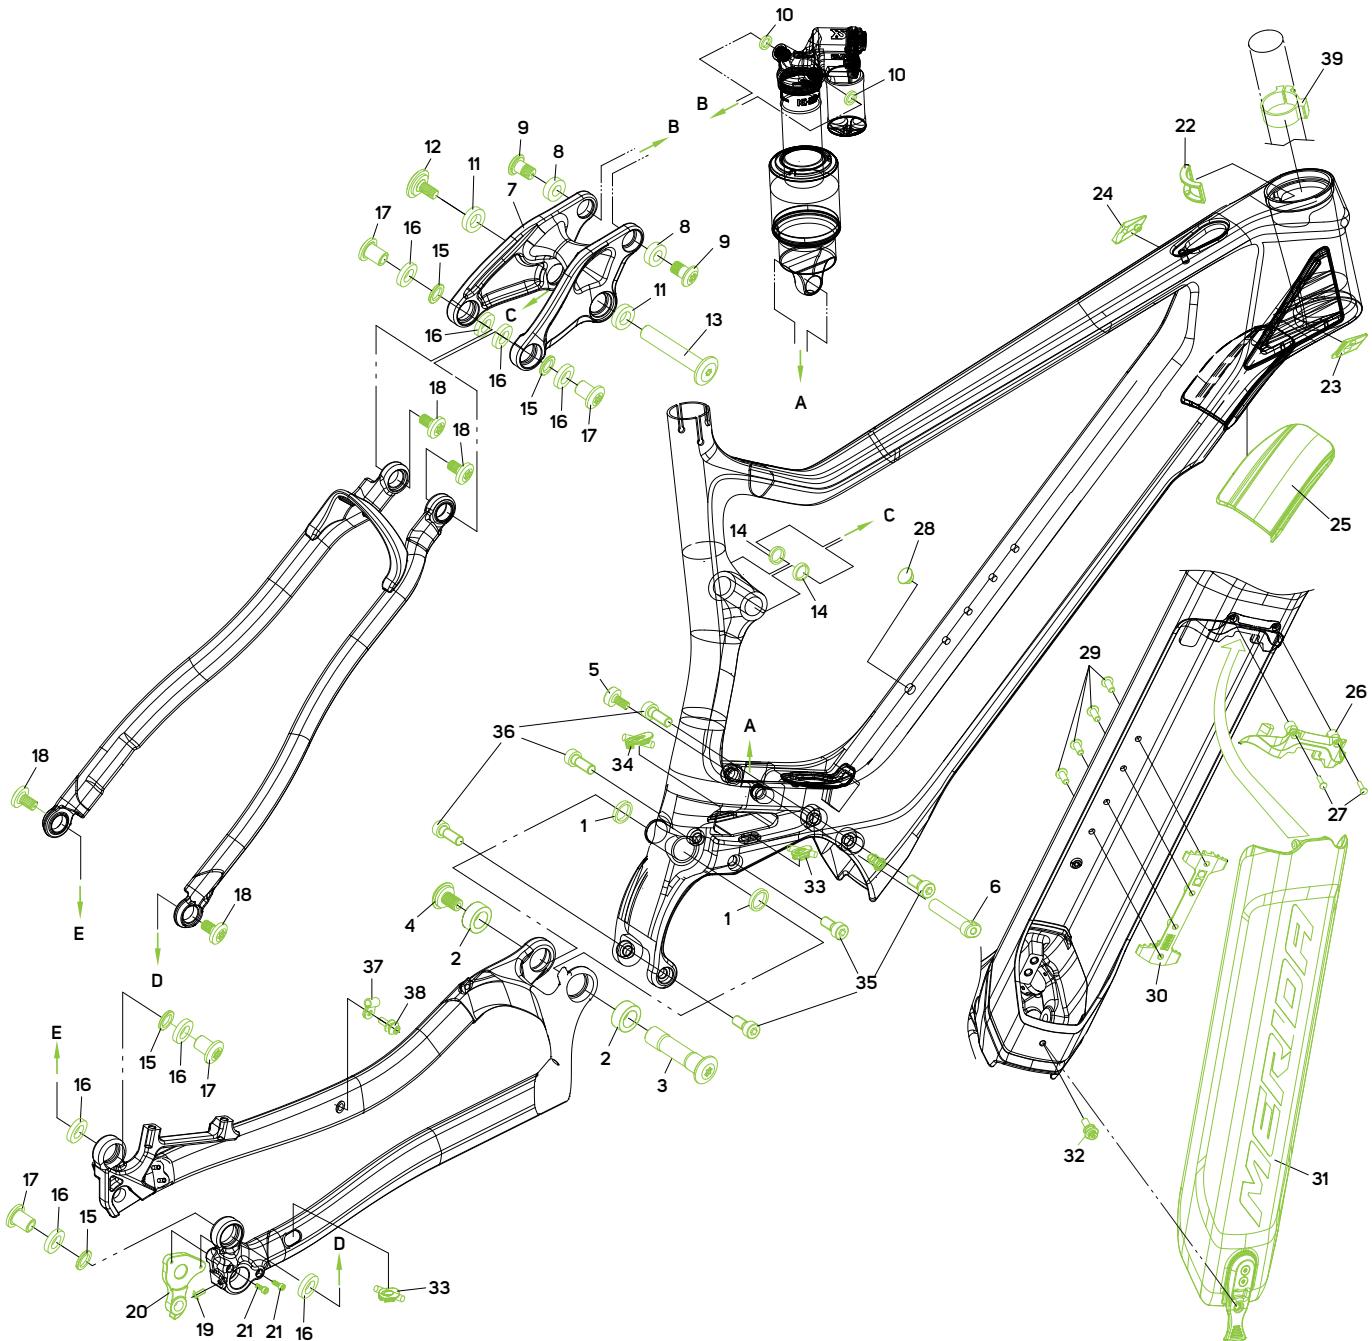



eONE-TWENTY 500

GLOSSY GREEN/MATT BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| XC/MARATHON | TRAIL | ALL MOUNTAIN | ENDURO |




TELAI	eONE-TWENTY LITE
MISURE	XS, S, M, L, XL
AMMORTIZZATORE	SUNTOUR UNAIR TR LOR8, lockout
FORCELLA	Suntour XCR34 LOR, Air, 130mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-400, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano FC-E8000 / CRE70-B, 34 teeth, 165 mm all sizes
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Expert TP, 38mm inner width, material: aluminium, Tubeless ready (tubeless tape and valved not included)
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis REKON, 27.5x2.6", fold / Maxxis REKON, 27.5x2.6", fold

PIEGA MANUBRIO	MERIDA Expert eTR, material: aluminium, 35mm diameter, Ø stem angle, 60 mm all sizes
ATTACCO MANUBRIO	FSA NO.55EP neck
CANNOTTO REGGISELLA	MERIDA Expert, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E7000
PESO	21.83 kg
PREZZO	3.590€



eONE-TWENTY

FRAME	eONE-TWENTY
MAX. WHEELSIZE	27.5x2.8"
HEAD TUBE	
TAPERED 1-1/8" - 1.5"	•
HEAD SET	
SEMI-INTEGRATED (44-55 MM)	•
BRAKE STANDARD	
DISC BRAKE ON CHAIN STAY	•
POST MOUNT 180 MM REAR BRAKE	•
SEATPOST DIAMETER	
30.9 MM	•
REAR DROPOUT-STANDARD	
THRU AXLE 12X148 MM	•
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
INTERNAL SEAT POST CABLE	•
DI2-READY	•
MOTOR INTERFACE	Shimano Type 2
BATTERY	Shimano E8010
SPEEDSENSOR MOUNT	SM-DUE10
RD HANGER	DH-057

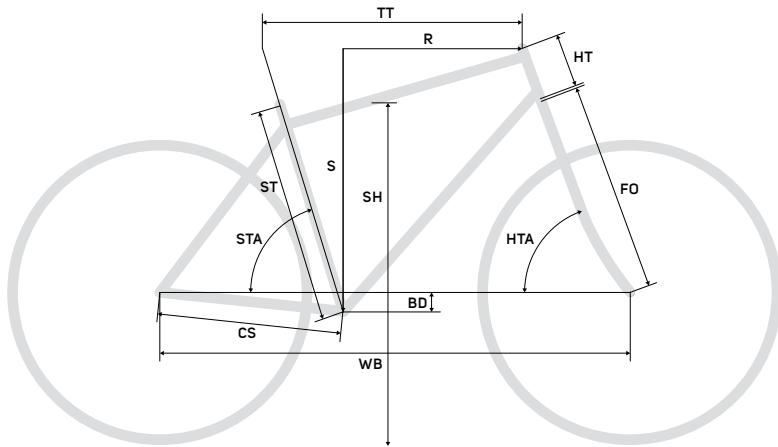


eONE-FORTY CFA


FS	S	M	L	XL
ST	400	440	490	540
TT	583	601	623	646
HT	110	120	130	140
HTA	67.5	67.5	67.5	67.5
STA	75	75	75	75
CS	439.5	439.5	439.5	439.5
BD	27.5	27.5	27.5	27.5
FO	541	541	541	541
S	609	619	628	637
R	420	435	455	475
WB	1155	1174	1198	1221

e ONE-TWENTY


MM	SHAFT EYELET PIN WIDTH		BODY EYELET PIN WIDTH		PIN ID
	PIN ID	● BODY EYELET PIN WIDTH	PIN ID	● SHAFT EYELET PIN WIDTH	
185x55 mm	-	-	40 mm	8 mm	

Recommended SAG: 25-30%

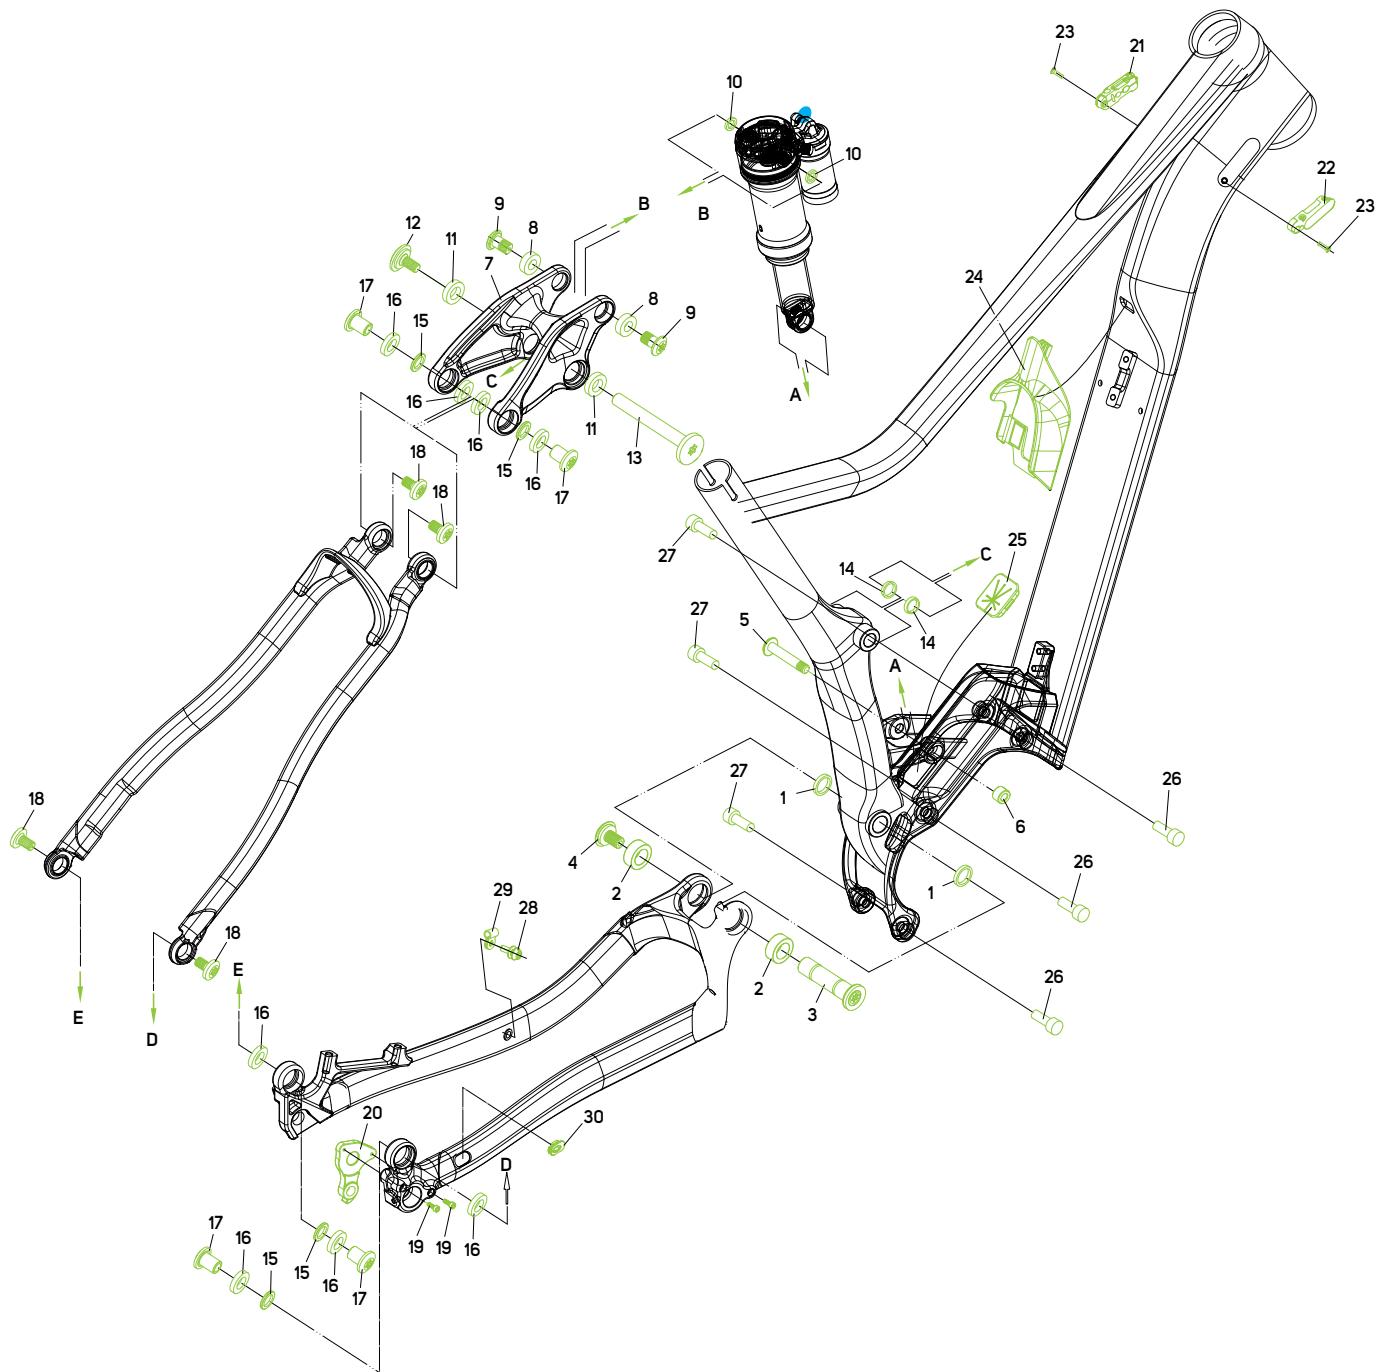

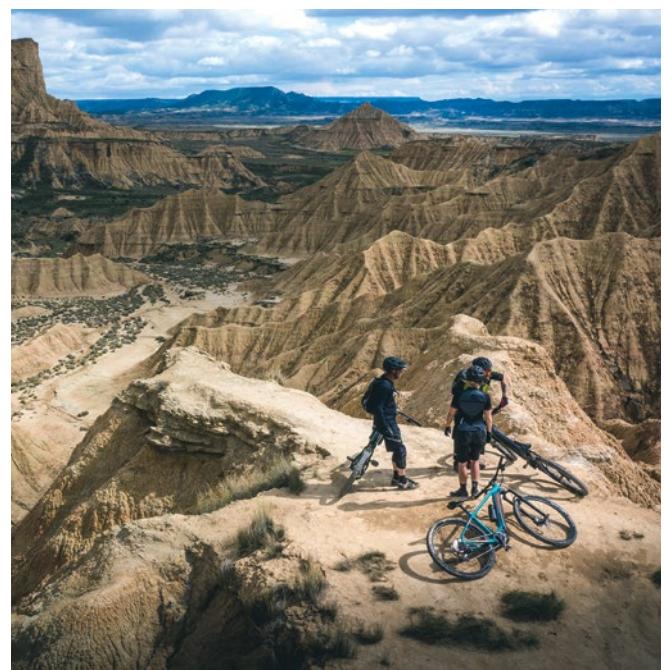



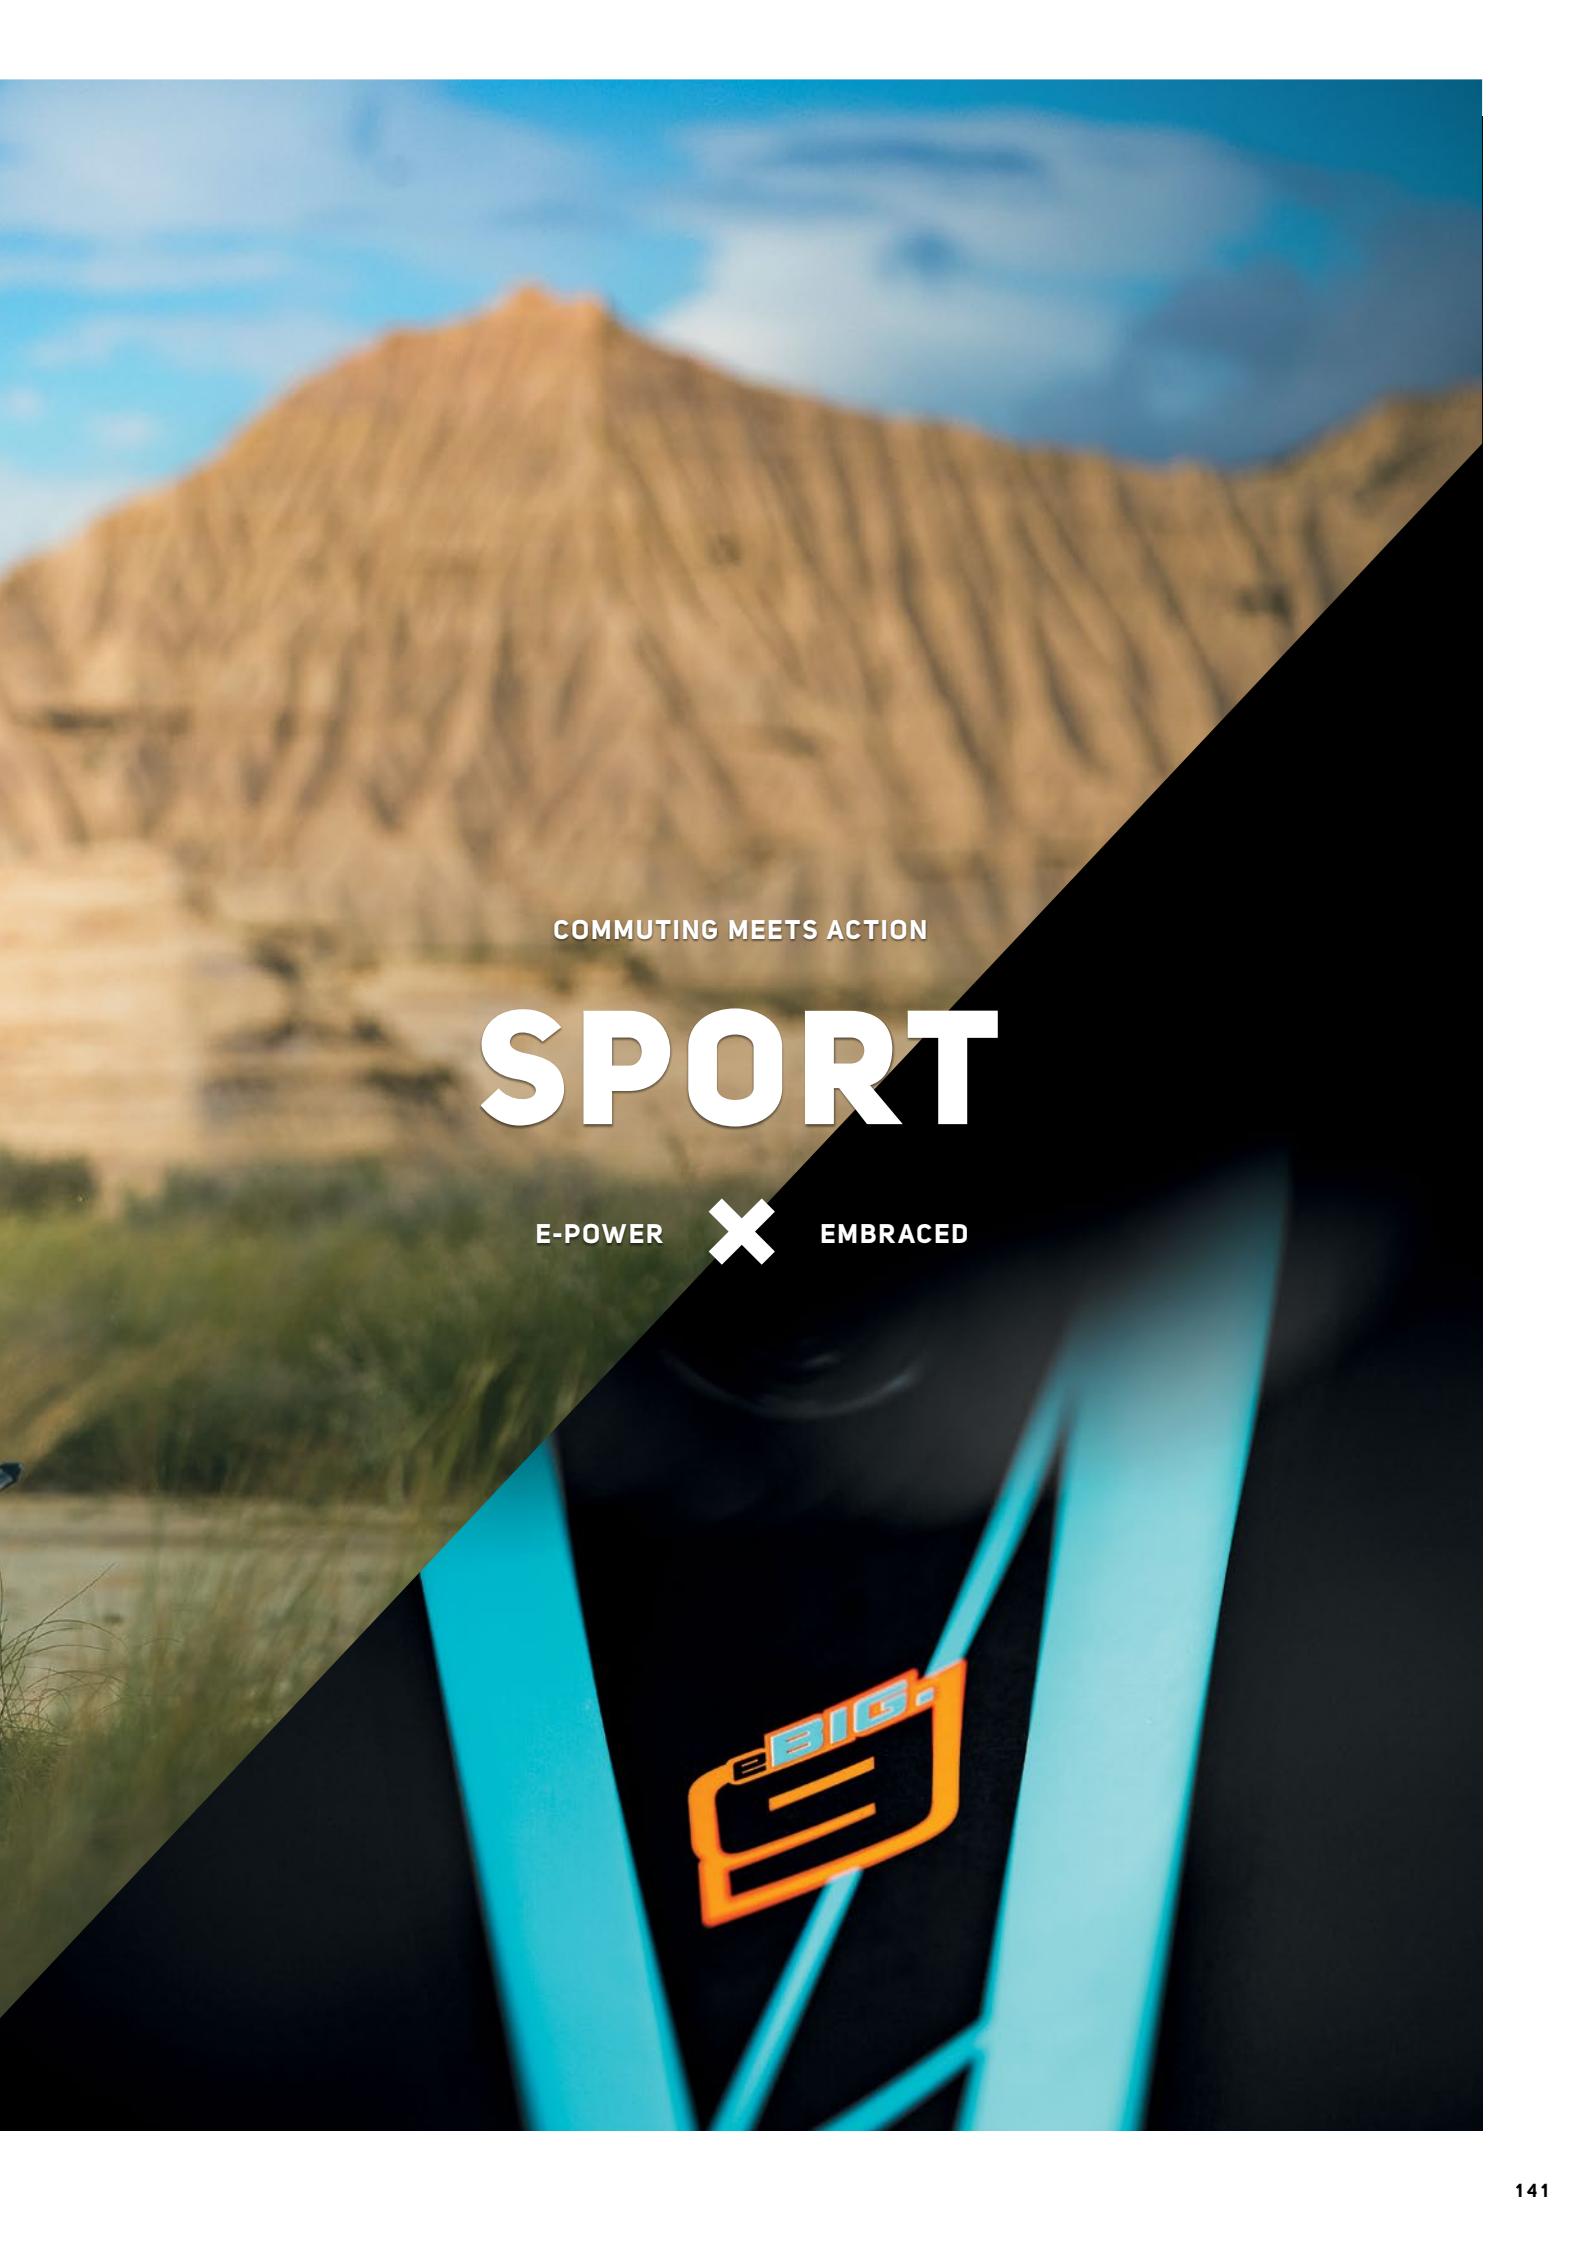

COMMUTING MEETS ACTION

SPORT

E-POWER



EMBRACED



eBIG.NINE 400

MATT MEDIUM BLUE/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| LEISURE | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eBIG.NINE LITE II
MISURE	S, M, L, XL
FORCELLA	Suntour XCR34 LOR, Air, 100mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano FC-E8000 / CRE70-12-B, 36 teeth, 165 mm-S/M/L, 170 mm-XL
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ardent Race, 29x2.35", fold / Maxxis Ardent Race, 29x2.35", fold

PIEGA MANUBRIO	MERIDA Expert CC, material: aluminium, 31.8mm diameter, 6° stem angle, 70 mm-S, 80 mm-M, 90 mm-L, 100 mm-XL
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E7000
PESO	21.64 kg
PREZZO	3.290€



eBIG.NINE 400

MATT TITAN/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| LEISURE | TRAIL | ALL MOUNTAIN | ENDURO |



TELAI	eBIG.NINE LITE II
MISURE	S, M, L, XL
FORCELLA	Suntour XCR34 LOR, Air, 100mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano FC-E8000 / CRE70-12-B, 36 teeth, 165 mm-S/M/L, 170 mm-XL
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ardent Race, 29x2.35", fold / Maxxis Ardent Race, 29x2.35", fold

PIEGA MANUBRIO	MERIDA Expert CC, material: aluminium, 31.8mm diameter, 6° stem angle, 70 mm-S, 80 mm-M, 90 mm-L, 100 mm-XL
ATTACCO MANUBRIO	MERIDA 1901
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E7000
PESO	21.64 kg
PREZZO	3.290€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



SMART
ENTRY



DI2
READY



F-MOUNT



K-MOUNT



C-MOUNT



CASTING
MOTOR
BRACKET



ENERGY
GUARD

eBIG.NINE 300 SE

MATT DARK GREY/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| LEISURE | TRAIL | ALL MOUNTAIN | ENDURO |

eBIG.SEVEN

FRAME SIZES XS S M



TELAI	eBIG.NINE LITE
MISURE	M-L-XL
FORCELLA	Suntour XCM32 LOR, Air, 100mm suspension travel, Tapered, 47mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano CRE70-12-B, 36 teeth, Shimano FC-E8000
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ardent Race, 29x2.2", fold / Maxxis Ardent Race, 29x2.2", fold

PIEGA MANUBRIO	MERIDA Expert CC, material: aluminium, 31.8mm diameter, 6° stem angle, 80 mm-M, 90 mm-L, 100 mm-XL
ATTACCO MANUBRIO	Merida 2341 Neck
CANNOTTO REGGISELLA	MERIDA Expert, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8010, 504Wh
DISPLAY	Shimano SC-E7000
PESO	22.75 kg
PREZZO	2.790€



eBIG.NINE 300 SE

SILK X'MAS RED/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| LEISURE | TRAIL | ALL MOUNTAIN | ENDURO |

eBIG.SEVEN

FRAME SIZES XS S M



TELAI	eBIG.NINE LITE
MISURE	M-L-XL
FORCELLA	Suntour XCM32 LOR, Air, 100mm suspension travel, Tapered, 47mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano CRE70-12-B, 36 teeth, Shimano FC-E8000
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ardent Race, 29x2.2", fold / Maxxis Ardent Race, 29x2.2", fold

PIEGA MANUBRIO	MERIDA Expert CC, material: aluminium, 31.8mm diameter, 6° stem angle, 80 mm-M, 90 mm-L, 100 mm-XL
ATTACCO MANUBRIO	Merida 2341 Neck
CANNOTTO REGGISELLA	MERIDA Expert, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA Comp CC, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8010, 504Wh
DISPLAY	Shimano SC-E7000
PESO	22.75 kg
PREZZO	2.790€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



D2 READY



C-S POST
MOUNT
DISC




BOOST 12-148
THROUGH
AXLE



BOOST 15-110
THROUGH
AXLE




CASTING
MOTOR
BRACKET

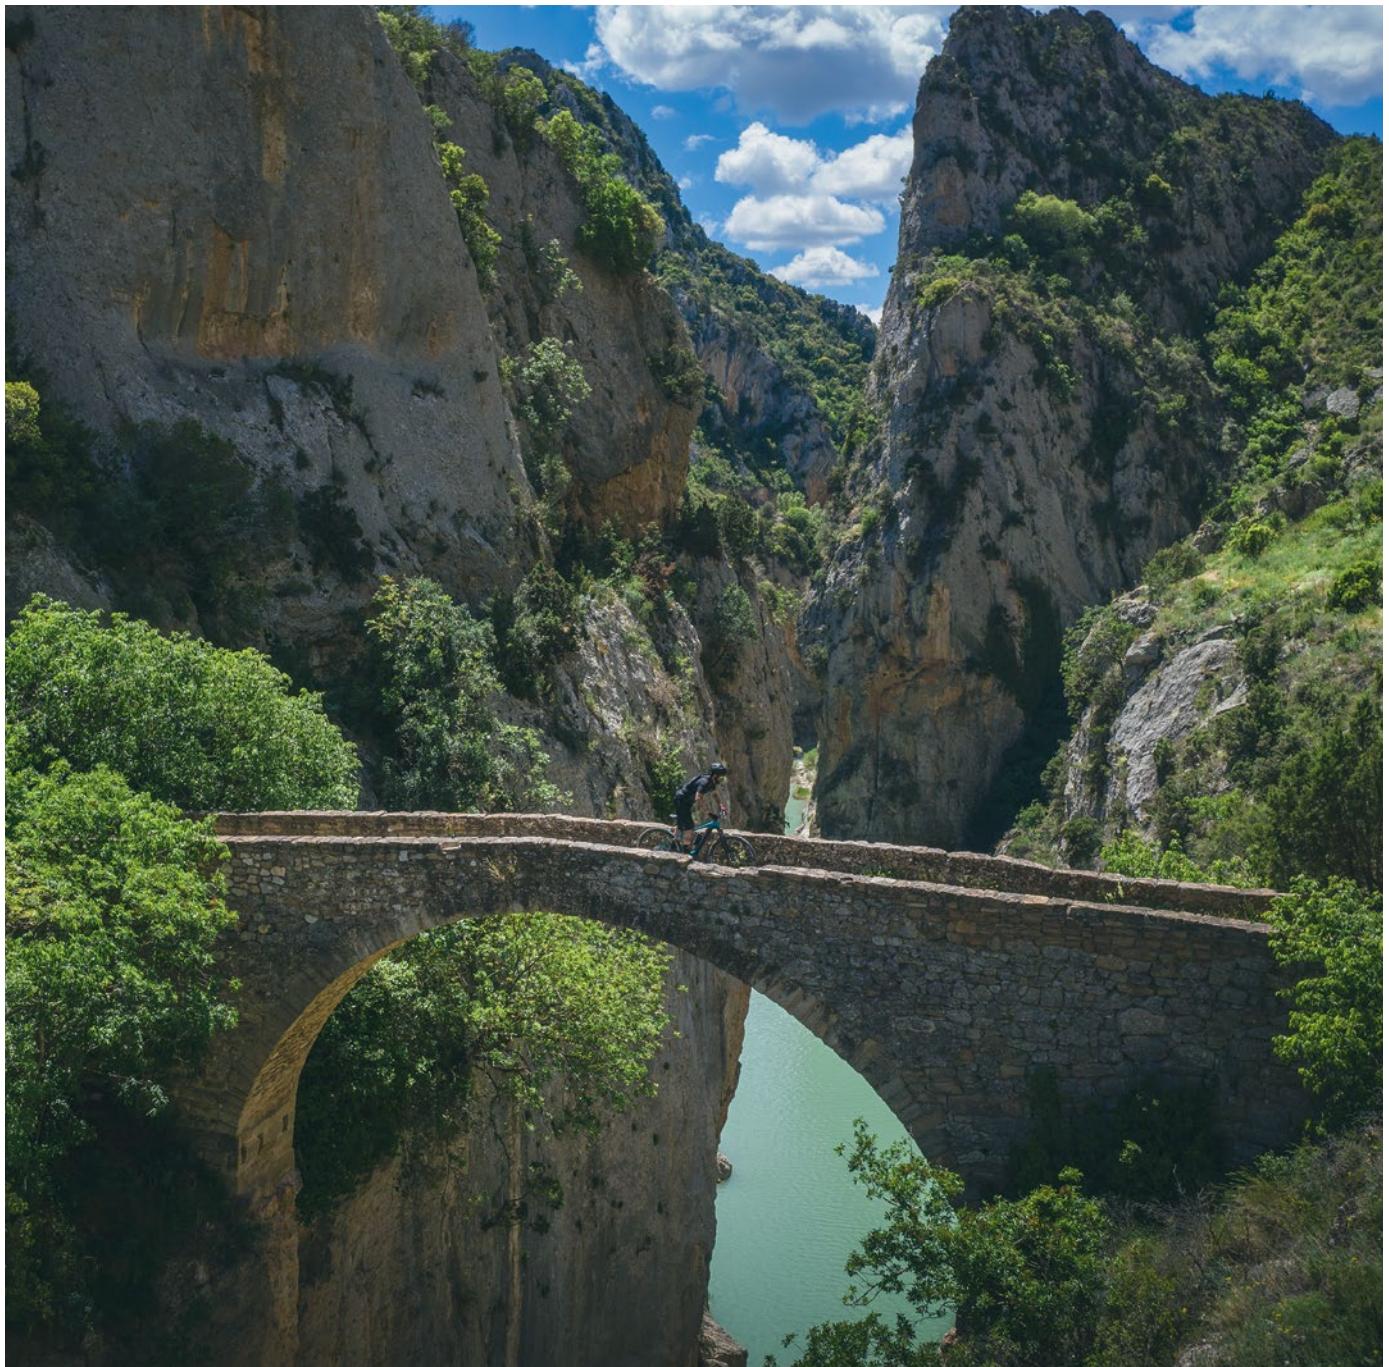

FRAME INTERFACES / GEOMETRIES

eBIG.NINE / SEVEN

FRAME	eBIG.NINE LITE II	eBIG.NINE/SEVEN LITE
MAX. WHEELSIZE	29x2.35" without fender 29x2.25" with fender	275x2.25" / 29x2.25"
HEAD TUBE		
TAPERED 1 1/8" - 1.5"		•
1.5"-1.5"	•	
HEADSET		
SEMI-INTEGRATED (44-55 MM)		•
INTEGRATED	•	
BRAKE STANDARD		
DISC BRAKE ON CHAIN STAY	•	•
POST MOUNT 180 MM REAR BRAKE	•	•
SEATPOST DIAMETER		
30.9 MM		•
34.9 MM	•	
REAR DROPOUT-STANDARD		
THRU AXLE 12X148 MM	•	•
CABLE ROUTING		
INTERNAL SHIFTING CABLES	•	•
INTERNAL BRAKE CABLE	•	•
INTERNAL SEAT POST CABLE	•	•
DI2-READY	•	•
EQUIPMENT OPTIONS		
PLETSCHER 18 MM	•	•
CARRIER MOUNT FRAME	•	•
FENDER MOUNT FRAME	•	•
MOTOR INTERFACE	Shimano Type 2	Shimano Type 2
BATTERY	Shimano E8035	Shimano E8010
SPEEDSENSOR MOUNT	SM-DUE11	SM-DUE11
RD HANGER	DH-057	

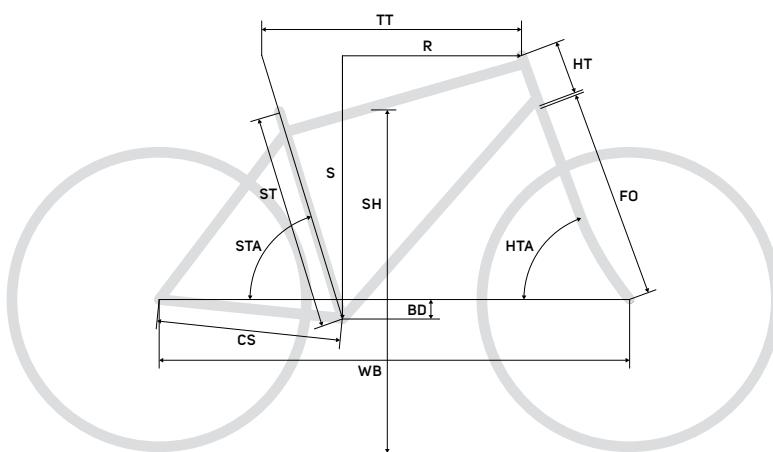



FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm]
 HTA head tube angle [°] STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm]
 FO fork length [mm] SH stand over height [mm] S stack [mm] R reach [mm] WB wheel base [mm]

eBIG.NINE LITE II

FS	S	M	L	XL
TT	575	590	610	630
ST	380	430	480	530
CS	465	465	465	465
HTA	68	68	68	68
STA	74,5	74,5	74,5	74,5
BD	52,5	52,5	52,5	52,5
HT	110	120	130	140
FO	506	506	506	506
R	404,5	417	434,5	452
STA	614,5	624	633	642,5
WB	1143	1160	1181	1202

eBIG.SEVEN		eBIG.NINE		
TS	275"	275"	29"	29"
FS	S	M	M	L
ST	380	430	430	480
TT	570	590	590	610
HT	125	135	115	125
HTA	68	68	69,5	69,5
STA	73,5	73,5	73,5	73,5
CS	438	438	458	458
BD	27	27	65	65
FO	487	487	511	511
S	579	588	634	643
R	399	416	402	420
WB	1104	1125	1123	1143

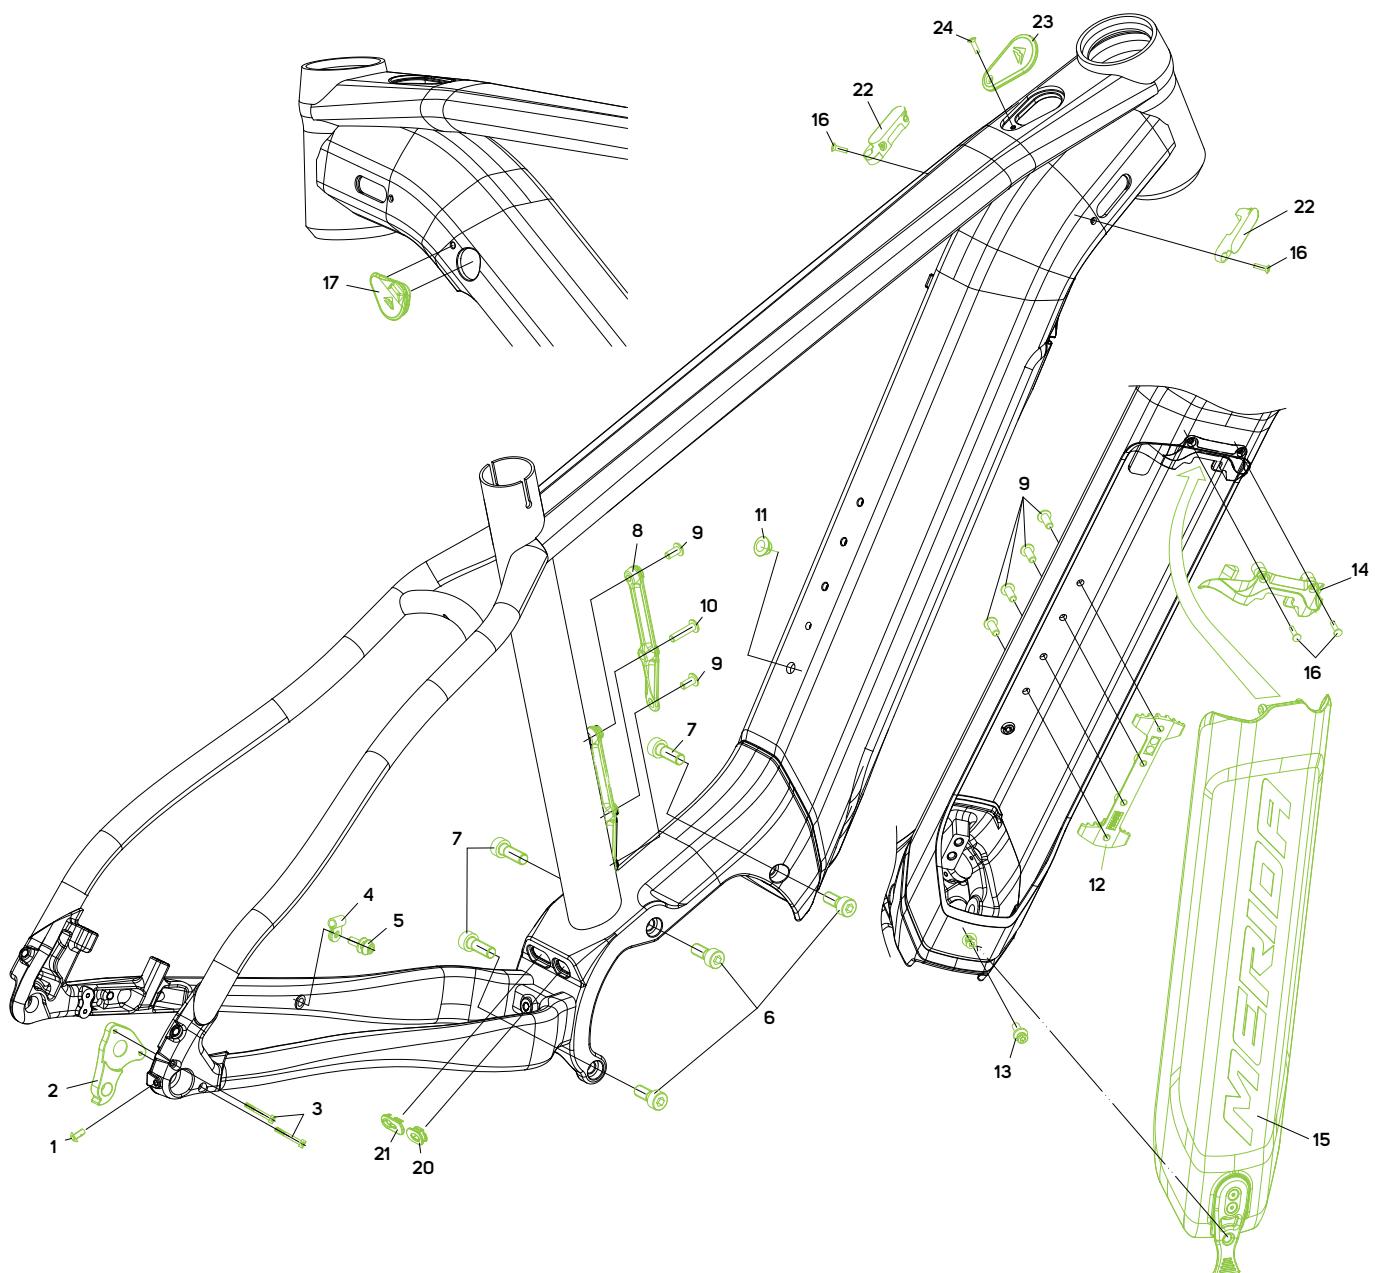

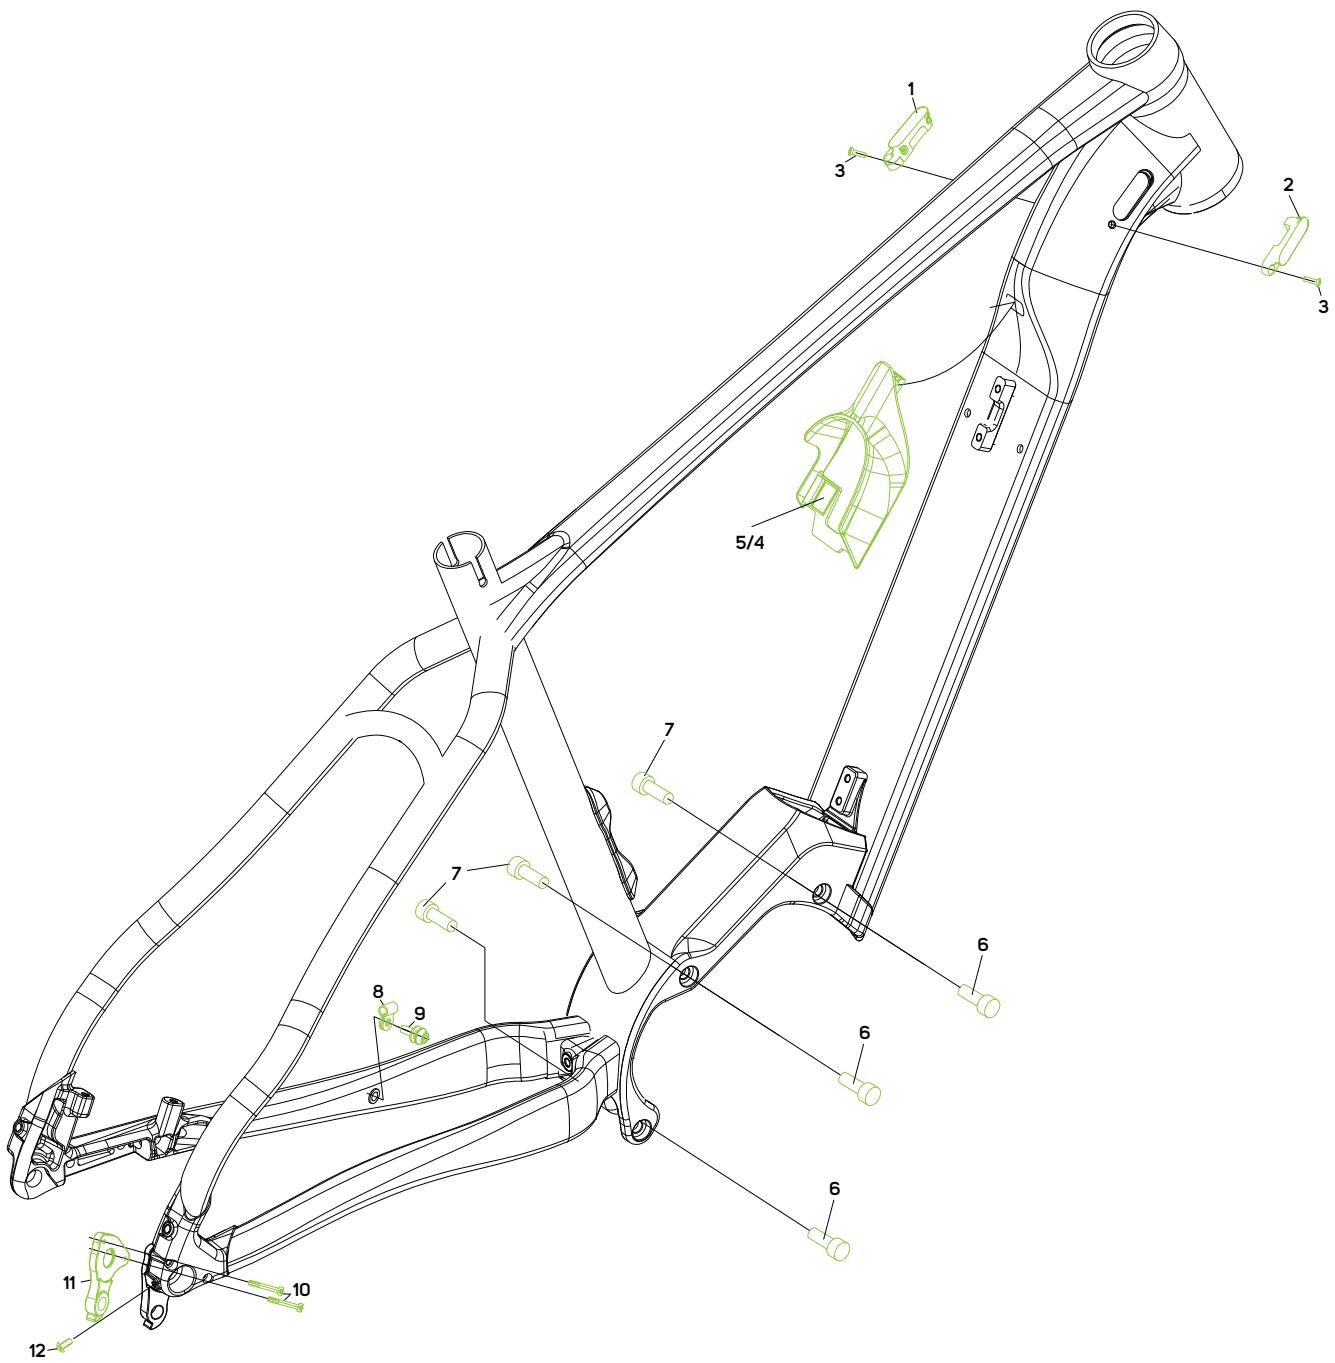

eBIG.TOUR 400 EQ

MATT MEDIUM BLUE/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | LEISURE | TRAIL |



TELAI	eBIG.TOUR LITE II
MISURE	S-M-L-XL
FORCELLA	Suntour XCR34 LOR, Air, 100mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano CRE70-12-B, 36 teeth, Shimano FC-E8000
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ikon, 29x2.2", fold / Maxxis Ikon, 29x2.2", fold
PIEGA MANUBRIO	MERIDA EXPERT CT, material: aluminium, 31.8mm diameter, adjustable, 90 mm all sizes

ATTACCO MANUBRIO	Merida 1901
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E6100
PESO	23.38 kg
PREZZO	3.390€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



SMART
ENTRY



DI2 READY



F-MOUNT



K-MOUNT



C-MOUNT



CASTING
MOTOR
BRACKET



INTERNAL
CLAMP



ENERGY
GUARD

eBIG.TOUR 400 EQ

MATT TITAN/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | LEISURE | TRAIL |



TELAI	eBIG.TOUR LITE II
MISURE	S-M-L-XL
FORCELLA	Suntour XCR34 LOR, Air, 100mm suspension travel, Tapered, 51mm fork offset
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	CNHG54
GUARNITURA	Shimano CRE70-12-B, 36 teeth, Shimano FC-E8000
MOZZI	Shimano MT400-B, 110x15mm / Shimano MT400-B, 148x12mm
CERCHI	MERIDA Comp CC, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Maxxis Ikon, 29x2.2", fold / Maxxis Ikon, 29x2.2", fold
PIEGA MANUBRIO	MERIDA EXPERT CT, material: aluminium, 31.8mm diameter, adjustable, 90 mm all sizes

ATTACCO MANUBRIO	Merida 1901
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-537
MANOPOLE	MERIDA Expert EC
MOTORE	Shimano E7000, 60Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E6100
PESO	23.38 kg
PREZZO	3.390€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



SMART
ENTRY



DI2
READY



F-MOUNT



K-MOUNT



C-MOUNT



CASTING
MOTOR
BRACKET




INTERNAL
CLAMP



ENERGY
GUARD

eBIG.TOUR


FRAME	eBIG.TOUR LITE II
MAX. WHEELSIZE	29x2.35" without fender 29x2.25" with fender
HEAD TUBE	
1.5"-1.5"	•
HEADSET	
INTEGRATED	•
BRAKE STANDARD	
DISC BRAKE ON CHAIN STAY	•
POST MOUNT 180 MM REAR BRAKE	•
SEATPOST DIAMETER	
30.9 MM	
34.9 MM	•
REAR DROPOUT-STANDARD	
THRU AXLE 12X148 MM	•
CABLE ROUTING	
INTERNAL SHIFTING CABLES	•
INTERNAL BRAKE CABLE	•
INTERNAL SEAT POST CABLE	•
DI2-READY	•
EQUIPMENT OPTIONS	
PLETSCHER 18 MM	•
CARRIER MOUNT FRAME	•
FENDER MOUNT FRAME	•
MOTOR INTERFACE	Shimano Type 2
BATTERY	Shimano E8035
SPEEDSENSOR MOUNT	SM-DUE11
RD HANGER	DH-057

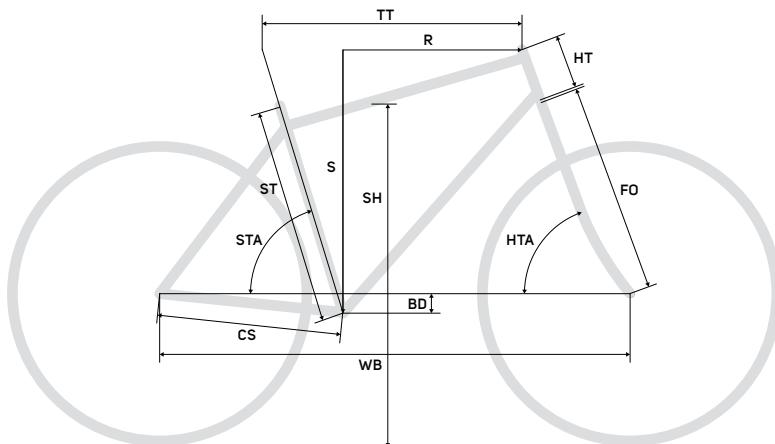

eBIG.TOUR LITE II

FS	S	M	L	XL
ST seat tube [mm]	380	430	480	530
TT top tube [mm]	575	590	610	630
HT head tube [mm]	110	120	130	140
HTA head tube angle [°]	68	68	68	68
STA seat tube angle [°]	74,5	74,5	74,5	74,5
CS chain stay length [mm]	465	465	465	465
BD bottom braced drop [mm]	52,5	52,5	52,5	52,5
FO fork length [mm]	506	506	506	506
S stack [mm]	614,5	624	633	642,5
R reach [mm]	404,5	417	434,5	452
WB wheel base [mm]	1143	1160	1181	1202

eBIG.TOUR ALUMINIUM

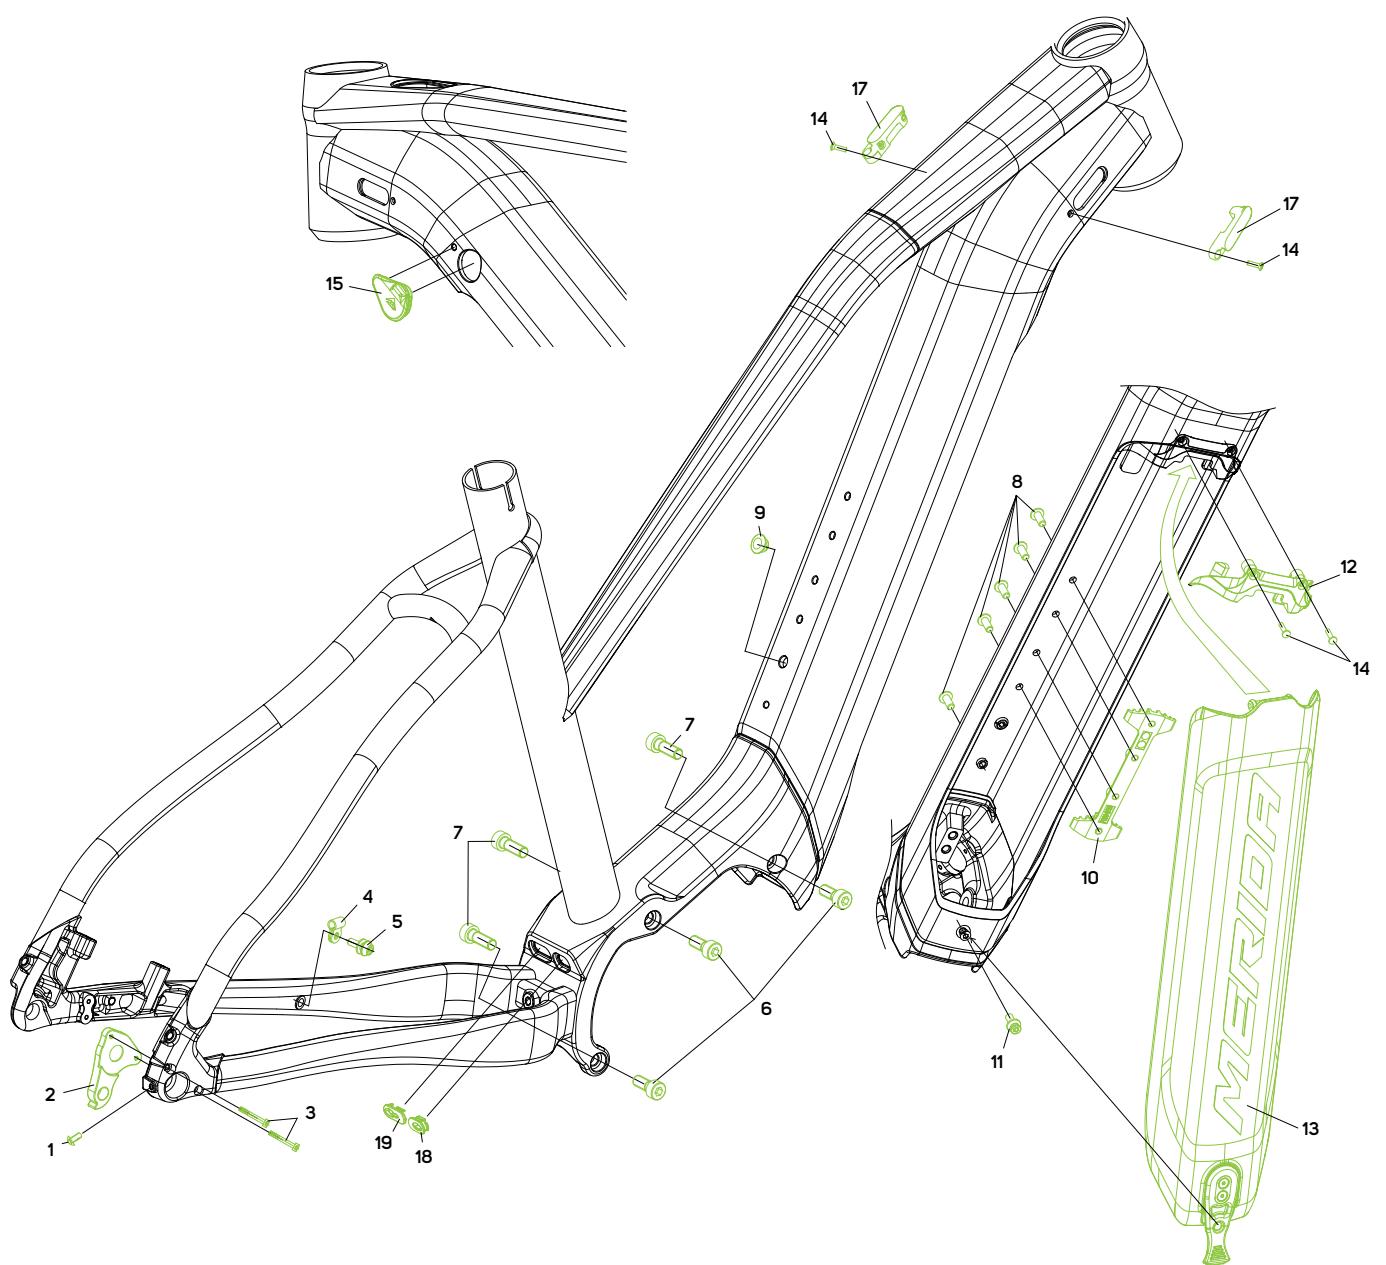



The background of the advertisement is a blurred photograph of a person riding a bicycle. The rider is wearing a light-colored jacket and dark pants. The bicycle has a black frame with white lettering that reads "SPECIALIZED". The background shows a city street with buildings and other people, all in soft focus.

LEISURE MEETS COMMUTING

ACTIVE

LIFESTYLE



IGNITED

eSPRESSO 400 EQ / -L

MATT GREY/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | TOUR | LEISURE |



TELAI	eSPRESSO LITE II
MISURE	XS, S, M, L, XL , eSPRESSO L XS(43L)-S(47L)-M(51L)-L(55L)
FORCELLA	Suntour NEX E25, Coil, 63mm suspension travel
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	KMC e10S
GUARNITURA	Shimano FC-E5000 / CRE50, 38 teeth
MOZZI	Shimano MT400, 100x15mm / Shimano MT400, 142x12mm
CERCHI	MERIDA COMP TK, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Continental Contact Cruiser, 622-50, wire, reflecting line / Continental Contact Cruiser, 622-50, wire, reflecting line

PIEGA MANUBRIO	MERIDA EXPERT CT, material: aluminium, 31.8mm diameter, adjustable, 90 mm-XS/S/M, 110 mm-L/XL
ATTACCO MANUBRIO	MERIDA 2346 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-891
MANOPOLE	MERIDA Expert TK
MOTORE	Shimano E5000, 40Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E6100
PESO	24.42 kg
PREZZO	2.890€



eESPRESSO 400 EQ / -L

MATT GREEN/BLACK



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | TOUR | LEISURE |



TELAI	eESPRESSO LITE II
MISURE	XS, S, M, L, XL , eESPRESSO L XS(43L)-S(47L)-M(51L)-L(55L)
FORCELLA	Suntour NEX E25, Coil, 63mm suspension travel
CAMBIO	Shimano Deore Shadow+
COMANDI	Shimano Deore
LEVE FRENO	Shimano Deore
FRENI	Shimano MT-200, 2 piston
CATENA	KMC e10S
GUARNITURA	Shimano FC-E5000 / CRE50, 38 teeth
MOZZI	Shimano MT400, 100x15mm / Shimano MT400, 142x12mm
CERCHI	MERIDA COMP TK, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG500, 11-42 teeth, 10 speed
COPERTONI	Continental Contact Cruiser, 622-50, wire, reflecting line / Continental Contact Cruiser, 622-50, wire, reflecting line

PIEGA MANUBRIO	MERIDA EXPERT CT, material: aluminium, 31.8mm diameter, adjustable, 90 mm-XS/S/M, 110 mm-L/XL
ATTACCO MANUBRIO	MERIDA 2346 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT CC, material: aluminium, 34.9mm diameter, 0mm setback
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-891
MANOPOLE	MERIDA Expert TK
MOTORE	Shimano E5000, 40Nm
BATTERIA	Shimano E8035, 504Wh
DISPLAY	Shimano SC-E6100
PESO	24.42 kg
PREZZO	2.890€



PROLITE 66
TRIPLE BUTTED
ALUMINUM



HYDRO
FORMING
SYSTEM



X-TAPER
HEADTUBE



SMOOTH
WELDING



INTERNAL
CABLE
ROUTING



SMART
ENTRY



DI2
READY



F-MOUNT



K-MOUNT



C-MOUNT



CASTING
MOTOR
BRACKET

eSPRESSO 200 SE / -L

SILK TITAN (MATT BLACK)



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | TOUR | LEISURE |



TELAI	eESPRESSO LITE
MISURE	XS(43)-S(47)-M(51)-L(55)-XL(59), eESPRESSO L XS(43L)-S(47L)-M(51L)-L(55L)
FORCELLA	Suntour NEX-PM-DS, Coil, 63mm suspension travel
CAMBIO	Shimano Altus RDM2000
COMANDI	Shimano Altus rapidfire
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
CATENA	KMC e9S
GUARNITURA	Shimano CRE50, 38 teeth, with chain guard, Shimano FC-E5000
MOZZI	Shimano TX505, 100x9mm / Shimano MT400, 142x12mm
CERCHI	MERIDA COMP TK, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG400, 12-36 teeth, 9 speed
COPERTONI	Continental AT RIDE, 622-42, wire, reflecting line / Continental AT RIDE, 622-42, wire, reflecting line


PIEGA MANUBRIO	MERIDA EXPERT CC, material: aluminium, 31.8mm diameter, 17° stem angle, 80 mm-XS/S, 90 mm-M, 100 mm-L, 110 mm-XL
ATTACCO MANUBRIO	MERIDA 2346 Neck, attached
CANNOTTO REGGISELLA	MERIDA EXPERT, material: aluminium, 30.9mm diameter, 15mm setback
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-891
MANOPOLE	MERIDA EXPERT TK
MOTORE	Shimano E5000, 40Nm
BATTERIA	Shimano E8014, 418Wh
DISPLAY	w/o display
PESO	20.36 kg
PREZZO	2.290€



FRAME INTERFACES / GEOMETRIES

eESPRESSO

FRAME	eESPRESSO LITE II	eESPRESSO LITE II HG	eESPRESSO LITE
MAX. WHEELSIZE	700x50C (with fender)	700x50C (with fender)	700x42 C (with fender)
<hr/>			
HEAD TUBE			
TAPERED 1-1/8" - 1.5"			
<hr/>			
HEADSET			
SEMI-INTEGRATED (44-55 MM)	•	•	•
<hr/>			
BRAKE STANDARD			
DISC BRAKE ON CHAIN STAY	•	•	•
POST MOUNT 160 MM REAR BRAKE	•		•
POST MOUNT 180 MM REAR BRAKE		•	
<hr/>			
SEATPOST DIAMETER			
30,9 MM			•
34,9 MM	•	•	
<hr/>			
REAR DROPOUT-STANDARD			
THRU AXLE 12X142 MM	•		•
HUB-GEAR SLIDER DO 9X135 MM		•	
<hr/>			
CABLE ROUTING			
INTERNAL SHIFTING CABLES	•	•	•
INTERNAL BRAKE CABLE	•	•	•
INTERNAL SEAT POST CABLE	•	•	•
<hr/>			
DI2-READY	•	•	•
<hr/>			
EQUIPMENT OPTIONS			
PLETSCHER 18 MM	•	•	•
CARRIER MOUNT FRAME (RACKTIME SHINE EVO)	•	•	•
CARRIER MOUNT FRAME (STANDARD)	•	•	•
FENDER MOUNT FRAME	•	•	•
FENDER MOUNT FORK	•	•	•
<hr/>			
MOTOR INTERFACE	Shimano Type 2	Shimano Type 2	Shimano Type 2
BATTERY	Shimano E8035	Shimano E8035	Shimano E8010
SPEEDSENSOR MOUNT	SM-DUE11	SM-DUE11	SM-DUE11
<hr/>			
RD HANGER		DH-057	

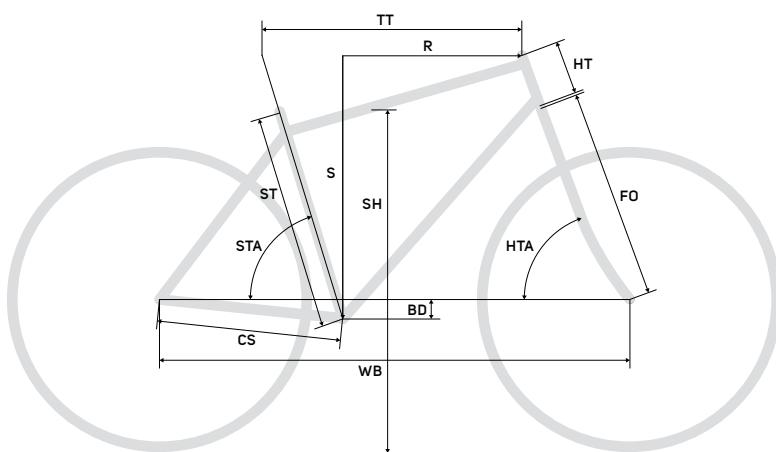

FS = ST frame size = seat tube [mm] TT top tube [mm] HT head tube [mm]
 HTA head tube angle [°] STA seat tube angle [°] CS chain stay length [mm] BD bottom bracket drop [mm]
 FO fork length [mm] S stack [mm] R reach [mm] WB wheel base [mm]

eSPERESSO LITE II / HG

FS	XS(43)	S(47)	M(51)	L(55)	XL(59)
TT	565	580	590	610	630
ST	430	470	510	550	590
CS	478	478	478	478	478
HTA	70,5	71	71	71,5	71,5
STA	75	74,5	74,5	74	74
BD	70	70	70	70	70
HT	130	140	155	175	205
FO	475	475	475	475	475
R	397,5	403,5	409,5	417	429
STA	626,5	637	651,5	672,5	701
WB	1113,5	1118	1129	1138	1159,5

eSPERESSO L LITE II / HG


FS	XS(43)	S(47)	M(51)	L(55)
TT	565	580	590	610
ST	430	470	510	550
CS	478	478	478	478
HTA	70,5	71	71	71,5
STA	75	74,5	74,5	74
BD	70	70	70	70
HT	130	140	155	175
FO	475	475	475	475
R	397,5	403,5	409,5	417
STA	626,5	637	651,5	672,5
WB	1113,5	1118	1129	1138

eSPERESSO


FS	XS(43)	S(47)	M(51)	L(55)	XL(59)
ST	430	470	510	550	590
TT	565	580	590	610	630
HT	130	140	155	175	205
HTA	70,5	71	71	71,5	71,5
STA	74	73,5	73,5	73	73
CS	475	475	475	475	475
BD	70	70	70	70	70
FO	477	477	477	477	477
S	627	638	653	674	702
R	385	391	397	404	415
WB	1101	1105	1116	1124	1145

eSPERESSO L

FS	XS(43)	S(47)	M(51)	L(55)
ST	430	470	510	550
TT	565	580	590	610
HT	130	140	155	175
HTA	70,5	71	71	71,5
STA	74	73,5	73,5	73
CS	475	475	475	475
BD	70	70	70	70
FO	477	477	477	477
S	627	638	653	674
R	385	391	397	404
WB	1101	1105	1116	1124

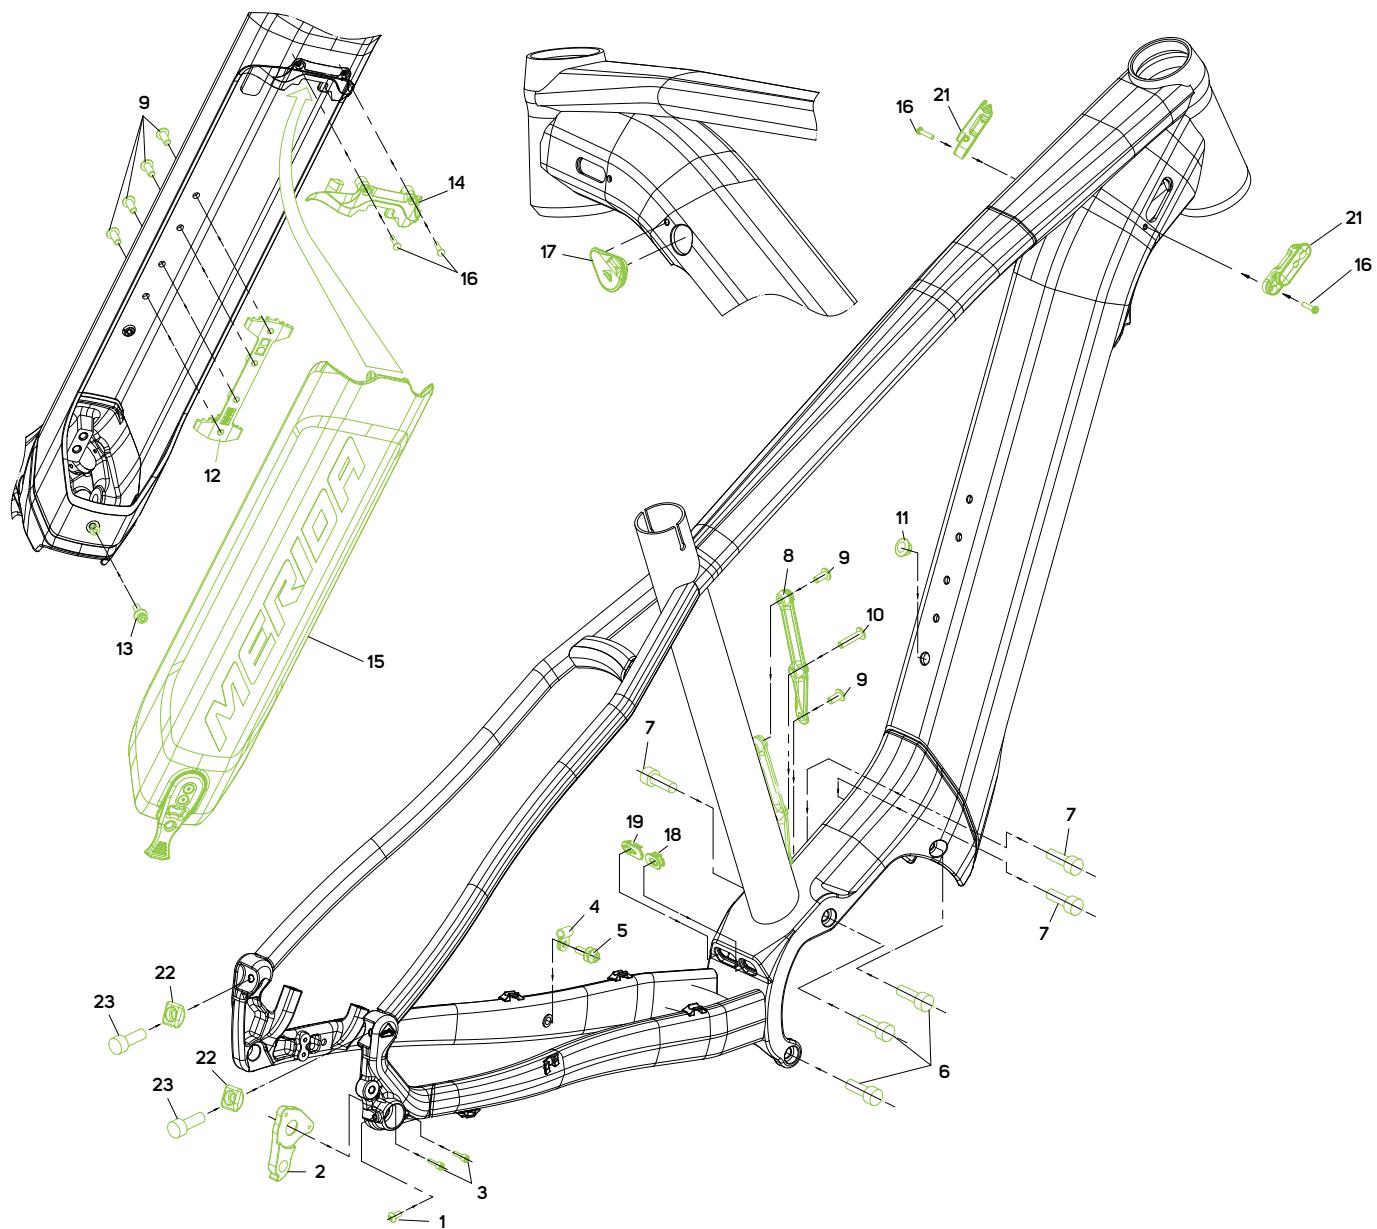

eSPRESSO INTUBE SLIDER

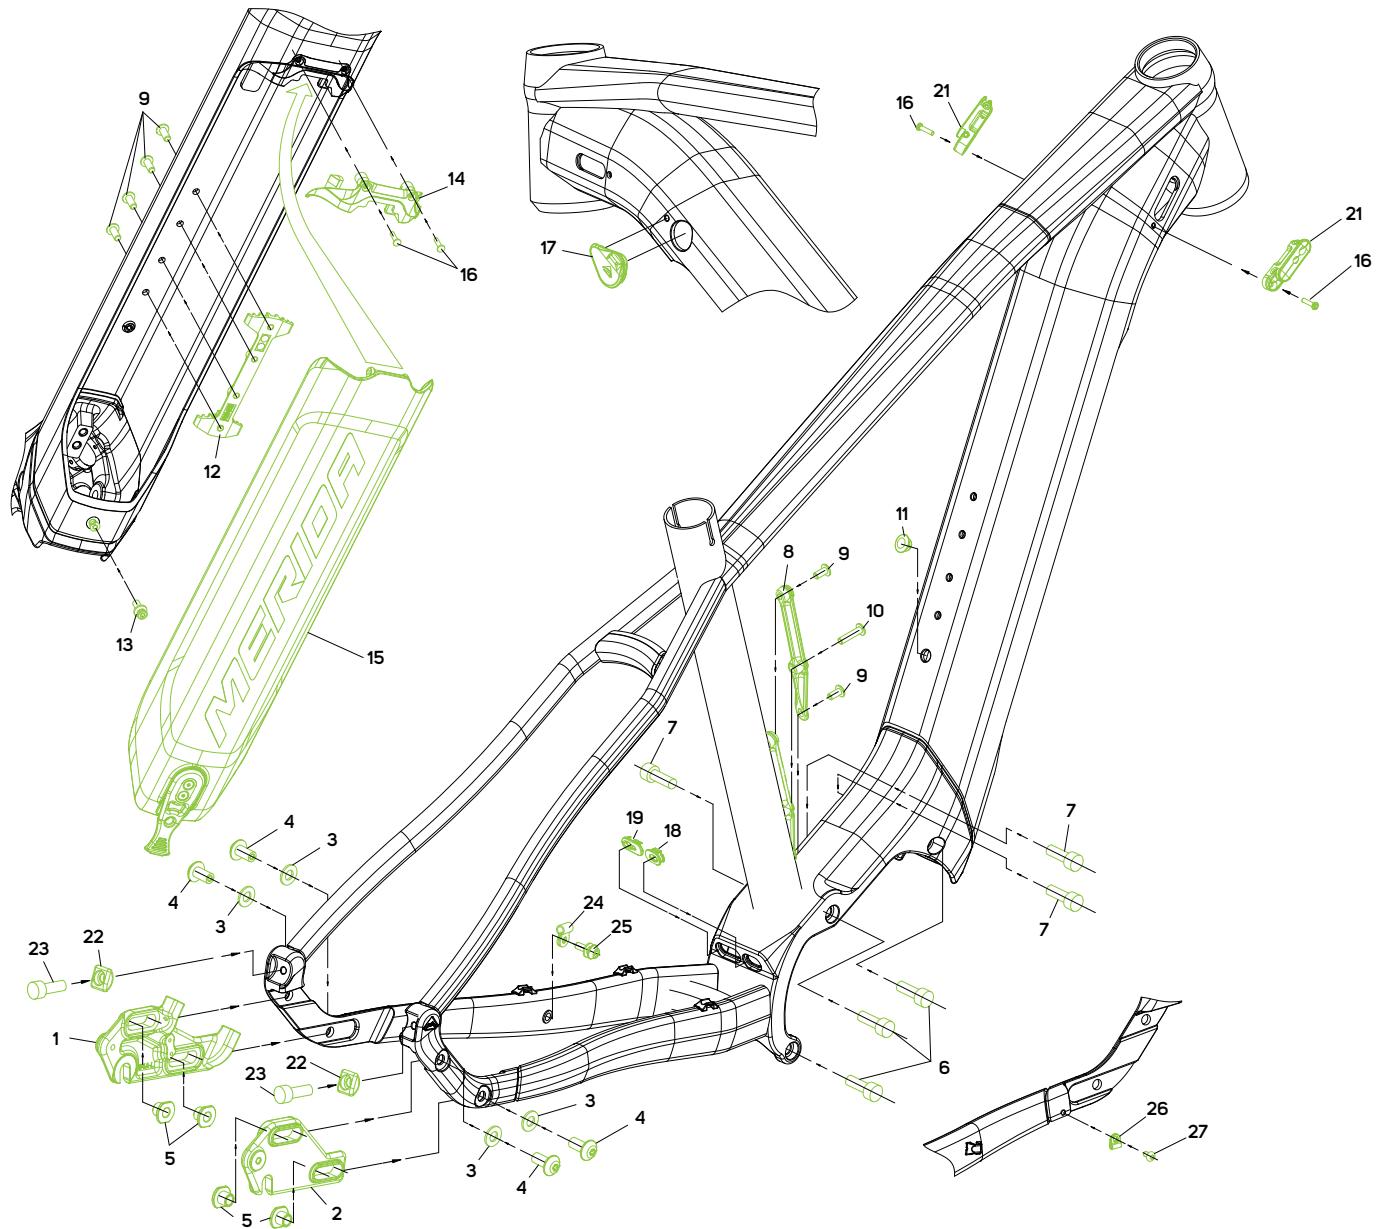

eESPRESSO CITY 200 EQ

MATT BLACK/GREEN (GLOSSY DARK SILVER)



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | TOUR | LEISURE |



TELAI	eESPRESSO CITY LITE
MISURE	XS, S, M, L, XL
FORCELLA	Suntour NEX-PM-DS, Coil, 63mm suspension travel
CAMBIO	Shimano Altus RDM2000
COMANDI	Shimano Altus rapidfire
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
CATENA	KMC e9S
GUARNITURA	Shimano FC-E5000 / CRE50, 38 teeth, 165 mm-XS, 170 mm-S/M/L, 175 mm-XL
MOZZI	Shimano TX505, 100x9mm / Shimano MT400, 142x12mm
CERCHI	MERIDA COMP TK, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG400, 12-36 teeth, 9 speed
COPERTONI	Continental Contact City Plus, 622-47, wire, reflecting line / Continental Contact City Plus, 622-47, wire, reflecting line

PIEGA MANUBRIO	MERIDA EXPERT TK, material: aluminium, 31.8mm diameter, adjustable, 90 mm-XS/S/M, 110 mm-L/XL
ATTACCO MANUBRIO	MERIDA 2346 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT TK, 30.9mm diameter, 15mm setback, 40mm seatpost suspension travel
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-891
MANOPOLE	MERIDA EXPERT TK
MOTORE	Shimano E5000, 40Nm
BATTERIA	Shimano E8014, 418Wh
DISPLAY	w/o display
PESO	24.29 kg
PREZZO	2.390€



eESPRESSO CITY 200 EQ

MATT BLACK/TITAN (GLOSSY DARK SILVER)



Telaio in alluminio a triplo spessore Prolite 66 con idroformatura HFS con aggressiva geometria del trail e escursione della ruota posteriore da 120 mm. Instradamento dei cavi "Smart Entry" per la massima libertà di movimento. La staffa del motore di fusione crea un aspetto integrato del motore nel telaio e fornisce una connessione estremamente forte tra telaio e motore.

| URBAN | COMMUTING | TOUR | LEISURE |



TELAI	eESPRESSO CITY LITE
MISURE	XS, S, M, L, XL
FORCELLA	Suntour NEX-PM-DS, Coil, 63mm suspension travel
CAMBIO	Shimano Altus RDM2000
COMANDI	Shimano Altus rapidfire
LEVE FRENO	attached
FRENI	Shimano MT-200, 2 piston
CATENA	KMC e9S
GUARNITURA	Shimano FC-E5000 / CRE50, 38 teeth, 165 mm-XS, 170 mm-S/M/L, 175 mm-XL
MOZZI	Shimano TX505, 100x9mm / Shimano MT400, 142x12mm
CERCHI	MERIDA COMP TK, 20mm inner width, material: aluminium
PACCO PIGNONI	Shimano HG400, 12-36 teeth, 9 speed
COPERTONI	Continental Contact City Plus, 622-47, wire, reflecting line / Continental Contact City Plus, 622-47, wire, reflecting line


PIEGA MANUBRIO	MERIDA EXPERT TK, material: aluminium, 31.8mm diameter, adjustable, 90 mm-XS/S/M, 110 mm-L/XL
ATTACCO MANUBRIO	MERIDA 2346 Neck
CANNOTTO REGGISELLA	MERIDA EXPERT TK, 30.9mm diameter, 15mm setback, 40mm seatpost suspension travel
SELLA	MERIDA EXPERT TK, V-mount
PEDALI	VP, VPE-891
MANOPOLE	MERIDA EXPERT TK
MOTORE	Shimano E5000, 40Nm
BATTERIA	Shimano E8014, 418Wh
DISPLAY	w/o display
PESO	24.29 kg
PREZZO	2.390€



eESPRESSO CITY

FRAME	LITE HG	LITE
MAX. WHEELSIZE	700x47C (with fender)	700x47C (with fender)
HEAD TUBE		
TAPERED 1 1/8" - 1.5"	•	•
HEADSET		
SEMI-INTEGRATED (44-55 MM)	•	•
BRAKE STANDARD		
DISC BRAKE ON CHAIN STAY	•	•
POST MOUNT 160 MM REAR BRAKE		•
POST MOUNT 180 MM REAR BRAKE	•	
SEATPOST DIAMETER		
30.9 MM	•	•
REAR DROPOUT-STANDARD		
THRU AXLE 12X142 MM		•
HUB GEAR SLIDER DO 9X135 MM	•	
CABLE ROUTING		
INTERNAL SHIFTING CABLES	•	•
INTERNAL BRAKE CABLE	•	•
INTERNAL SEAT POST CABLE	•	•
DI2-READY	•	•

FRAME	LITE HG	LITE
EQUIPMENT OPTIONS		
PLETSCHER 18 MM	•	•
CARRIER MOUNT FRAME (RACKTIME SHINE EVO)	•	•
CARRIER MOUNT FRAME (STANDARD)	•	•
FENDER MOUNT FRAME	•	•
FENDER MOUNT FORK	•	•
MOTOR INTERFACE	Shimano Type 2	Shimano Type 2
BATTERY	Shimano E8010	Shimano E8010
SPEEDSENSOR MOUNT	SM-DUE11	SM-DUE11
RD HANGER	DH-064A-L/R	DH-057

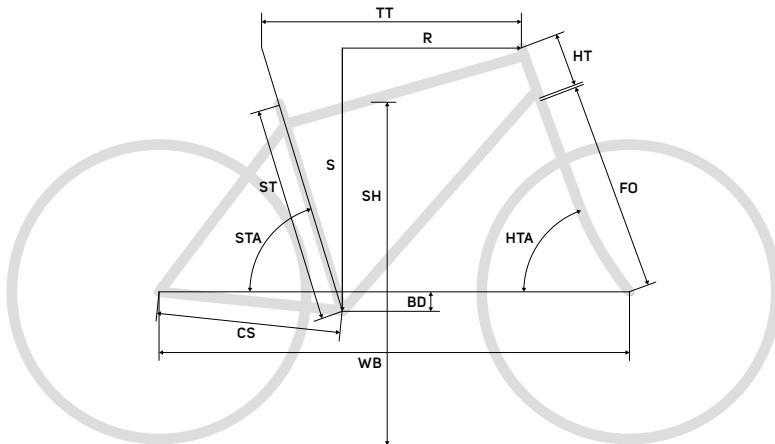

eSPRESSO CITY LITE HG

FS frame size	XS(41.5)	S(45)	M(49)	L(53)	XL(57)
ST seat tube [mm]	415	450	490	530	570
TT top tube [mm]	575	590	605	620	635
HT head tube [mm]	160	170	185	200	215
HTA head tube angle [°]	69.5	70	70	70.5	70.5
STA seat tube angle [°]	74	73.5	73	73	72.5
CS chain stay length [mm]	490	490	490	490	490
BD bottom braced drop [mm]	70	70	70	70	70
FO fork length [mm]	477	477	477	477	477
S stack [mm]	651	662	676	693	707
R reach [mm]	389	394	398	408	412
WB wheel base [mm]	1140	1143	1153	1163	1171

eSPRESSO CITY LITE

XS(41.5)	S(45)	M(49)	L(53)	XL(57)
415	450	490	530	570
575	590	605	620	635
160	170	185	200	215
69.5	70	70	70.5	70.5
74	73.5	73	73	72.5
490	490	490	490	490
70	70	70	70	70
477	477	477	477	477
651	662	676	693	707
389	394	398	408	412
1140	1143	1153	1163	1171

